INDEX OF DRAWINGS

"X" INDICATES ISSUED FOR REVIEW/CONSTRUCTION

X X CONSTRUCTION DOCUMENTS	TBD	ТВО	TBD	TBD	TBD	TBD	TBD	No. G001 G002	Sheet Name TITLE SHEET, SHEET INDEX, LOCATION MAP GENERAL INFORMATION
X								G101	CODE INFORMATION
X								S100	WALL TYPES
X								A001	WALL TYPES
X								A002 AD101	GENERAL ARCH DETAILS DEMOLITION PLANS
X								A100	FLOOR PLAN - LOWER LEVEL
Χ								A101	FLOOR PLAN - MAIN LEVEL
Х								A111	REFLECTED CEILING PLANS
Х								A120	FINISH SCHEDULE
Х								A121	FINISH FLOOR PLANS
Х								A141	SCHEMATIC POWER/DATA PLANS
Х								A411	ENLARGED PLANS, INTERIOR ELEVATIONS - LOWER LEVEL
Х								A421	ENLARGED PLANS, INTERIOR ELEVATIONS - MAIN LEVEL
Х								A550	GENERAL INTERIOR DETAILS
X								A551	GENERAL INTERIOR DETAILS
X								A600	DOOR SCHEDULE & TYPES



ARCHITECT GROTH Design Group N58 W6181 Columbia Road Cedarburg, WI 53012 www.gdg-architects.com PH (262) 377-8001 FX (262) 377-8003 STRUCTURAL: SVET ROUSSEV, P.E. ROUSSEV ENGINEERING SOLUTIONS LLC 406 WINDY PEAK RD VERONA, WI 53593 608-620-3036 PLUMBING: **KEITH SCHEDLER** DON'S PLUMBING 1003 E CLIFTON ST TOMAH, WI 54660 608 372 4219 ELECTRICAL: CHRISTOPHER C. OLSON GALILEO GROUP, LLC

> 2045 32ND STREET SOUTH LA CROSSE, WI 54601

SEAL

PROJECT TEAM

GROTH
Design
Group

ST. PAUL
LUTHERAN CHURCH & SCHOOL
KNOW CHRIST. GROW IN CHRIST. SHOW CHRIST TO THE WORLD.

525 SUPERIOR AVE TOMAH, WI 54660

ST. PAUL

LUTHERAN

PHASE 1 -

RENOVATION


ST. PAUL LUTHERAN

PHASE 1 - RENOVATION

ALTERNATES:

1 - EXTERIOR DOOR 115A AT ENTRY 115 - BASE BID TO KEEP EXISTING DOOR AND REPLACE FRAME. ALTERNATE TO REPLACE BOTH DOOR AND FRAME.

525 SUPERIOR AVE TOMAH, WI 54660

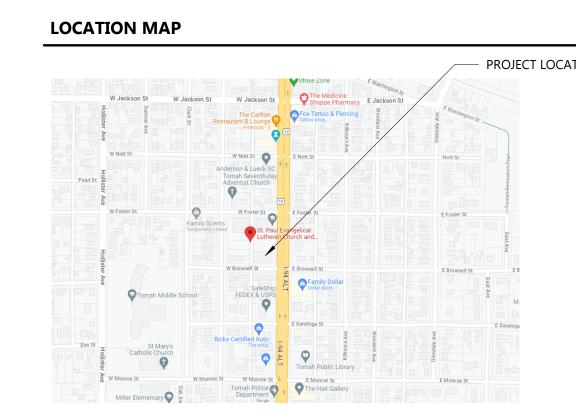

PROJECT INFO

Date

08.22.23

Project No.

SHEET TITLE

TITLE SHEET, SHEET INDEX, LOCATION MAP

G001

EXTERIOR ELEVATION SYMBOL INTERIOR ELEVATION SYMBOL KEYNOT WINDOW ENLARGED PLAN/DETAIL CALLOUT

	PRC
n grid reference	ACT ADA ADI ADJ
	AFF ALT APP
LEVATION REFERENCE	BD BLD BO BOT
^r AG	CAB CAL CFC
Ë	CIP CJ
W TAG N CLOUD & TAG	CL CLG CMI COL CON CON CON COR CPT CT
	DEG DEN DEP DIA DIM DN DS DW
	EA EIFS
	EJ EL ELEG EQ EQU ESM

PROJECT ABI	BREVIATION LIST		
ACT	ACOUSTICAL CEILING TILE	LAV	LAVATORY
ADA	AMERICAN WITH DISABILITIES ACT	LTG	LIGHTING
ADDL	ADDITIONAL		
ADJ	ADJACENT, ADJOINING, OR	MAS	MASONRY
AFF	ADJUSTABLE ABOVE FINISHED FLOOR	MATL MAX	MATERIAL MAXIMUM
ALT	ALTERNATE	MECH	MECHANICAL
APPROX	APPROXIMATE	MEZZ	MEZZANINE
		MFR	MANUFACTURER
BD	BOARD	MIN	MINIMUM OR MINUTE
BLDG BO	BUILDING BOTTOM OF	MISC MO	MISCELLANEOUS MASONRY OPENING OR MOTOR
BOT	BOTTOM OF	IVIO	OPERATED
50.	20110	MTL	METAL
CAB	CABINET		
CALC	CALCULATION	NA	NOT APPLICABLE
CFCI	CONTRACTOR INSTALLED	NIC	NOT IN CONTRACT NUMBER
CIP	CONTRACTOR INSTALLED CAST IN PLACE	NO NOM	NOMINAL
CJ	CONSTRUCTION JOINT OR CONTROL	NTS	NOT TO SCALE
	JOINT		
CL	CENTER LINE	OC	ON CENTER
CLG	CEILING	OD	OUTSIDE DIAMETER OR OUTSIDE
CMU COL	CONCRETE MASONRY UNIT COLUMN	OFCI	DIMENSION OWNER FURNISHED,
CONC	CONCRETE	OFCI	CONTRACTOR INSTALLED
CONT	CONTINUOUS	OFOI	OWNER FURNISHED,
CONTR	CONTRACT OR CONTRACTOR		OWNER INSTALLED
COORD	COORDINATE	ОН	OVERHANG OR OVERHEAD
CORR	CORRIDOR	OPH	OPPOSITE HAND
CPT CT	CARPET CERAMIC TILE	OPNG OPP	OPENING OPPOSITE
C1	CEIV WILE FIEL	011	311 33112
DEG	DEGREE	PERP	PERPENDICULAR
DEMO	DEMOLISH, DEMOLITION	PLAM	PLASTIC LAMINATE
DEPT DIA	DEPARTMENT DIAMETER	PR PREFAB	PAIR PREFABRICATED
DIM	DIMENSION	PRELIM	PRELIMINARY
DN	DOWN	PROJ	PROJECT
DS	DOWNSPOUT	PROP	PROPERTY
DW	DISHWASHER OR DRYWALL	PSI	POUNDS PER SQUARE INCH
DWG	DRAWING	PTRN-X	PATTERN "X" FOR WALL TILE
EA	EACH	QT	QUARRY TILE
EIFS	EXTERIOR INSULATION AND	QTY	QUANTITY
EJ	FINISH SYSTEM EXPANSION JOINT	R	RADIUS OR RISER
EL	ELEVATION	RCP	REFLECTED CEILING PLAN
ELEC	ELECTRIC	RD	ROAD OR ROOF DRAIN
EQ	EQUAL	REF	REFERENCE OR REFRIGERATOR
EQUIP	EQUIPMENT	REINF	REINFORCE
ESMT	EASEMENT	REQD	REQUIRED
EXIST EXT	EXISTING EXTERIOR, EXTERNAL, OR	REV RFG	REVISION ROOFING
LXI	EXTERIOR, EXTERNAL, OR EXTINGUISHER	RM	ROOM
ETR	EXISTING TO REMAIN	RO	ROUGH OPENING
	51.005.55.431	ROW	RIGHT OF WAY
FD FDN	FLOOR DRAIN FOUNDATION	SCHED	SCHEDULE
FDN FE	FOUNDATION FIRE EXTINGUISHER	SE	SQUARE FOOT (FEET)
FEC	FIRE EXTINGUISHER CABINET	SIM	SIMILAR
FIN	FINISH	SPEC	SPECIFICATION
FLR	FLOOR	SQ	SQUARE
FP	FIRE PROTECTION OR FIREPROOF	SQ IN	SQUARE INCH
FT FTG	FOOT OR FEET FOOTING	STC STOR	SOUND TRANSMISSION CLASS STORAGE
FURN	FURNISH OR FURNITURE	STRUCT	STORAGE STRUCTURE OR STRUCTURAL
		CLICD	CLICDENID OD CLICDENIDED

GYPSUM WALL BOARD

GRAB BAR

GYPSUM

HOSE BIBB

HEIGHT

GOVERNMENT

HOLLOW METAL

CONDITIONING

HOT WATER

INCHES

INTERIOR

HORIZONTAL

GALV

GOVT GYP

GWB

HGT

НМ

HORIZ

HVAC

GLU LAM

GAUGE OR GYPSUM ASSOCIATION

GALAVANIC OR GALVANIZED

HEATING, VENTILATION, AND AIR

GLUED LAMINATED WOOD

SUSP

TEMP

THRU

TOW

UNFIN

UNO

UTIL

VERT

W/O

TYP

SUSPEND OR SUSPENDED

TONGUE AND GROOVE

TELEPHONE

TOP OF WALL

UNFINISHED

UNLESS NOTED OTHERWISE

VINYL COMPOSITION TILE

THROUGH

TOP OF

TYPICAL

UTILITY

VERTICAL

WITHOUT

WOOD

WITH

TOTAL

MEP GENERAL NOTES:

- ALL MECHANICAL, ELECTRICAL, PLUMBING, AND FIRE PROTECTION TO BE DESIGN/BUILD WORK. INDIVIDUAL CONTRACTORS SHALL BE RESPONSIBLE FOR PROVIDING ENGINEERED, STAMPED, AND SIGNED DRAWINGS COMPLYING WITH ALL LOCAL, STATE AND FEDERAL CODES. CONTRACTOR SHALL SUBMIT DRAWINGS TO ALL GOVERNING CODE OFFICIALS AND BUILDING MANAGEMENT FOR REVIEW, CONTRACTORS WILL BE RESPONSIBLE FOR ALL PLAN REVIEW AND PERMIT FEES, ALL PERMITS, INSPECTION REPORTS, AND CERTIFICATES OF INSURANCE ARE TO BE TURNED OVER TO OWNER.
- GENERAL CONTRACTOR TO COORDINATE MEP WORK ON SITE. ALL CONTRACTORS ARE TO COORDINATE ACCESS TO SITE AND SCHEDULE OF WORK WITH GENERAL CONTRACTOR.
- GENERAL CONTRACTOR SHALL ORGANIZE PRE-DESIGN MEETING WITH OWNER, ARCHITECT, AND MEPFP CONTRACTORS TO OUTLINE OWNER MEPFP REQUIREMENTS. MEETING MINUTES SHALL BE DISTRIBUTED TO OWNER, GENERAL CONTRACTOR, AND
- MEPFP DESIGN/BUILD CONSTRUCTION DRAWINGS SHALL BE SUBMITTED TO OWNER AND ARCHITECT FOR REVIEW AND APPROVAL PRIOR TO THE COMMENCEMENT OF WORK. PLANS SHOULD INCLUDE LOCATIONS OF ALL VISIBLE ELEMENTS INCLUDING BUT NOT LIMITED TO: PLUMBING CLEANOUTS, CONTROL PANELS, ACCESS DOORS, DAMPER CONTROLS, THERMOSTATS, SENSORS, OUTLETS, SWITCHES, AND LIGHTING.
- ALL BUILDING SYSTEMS ARE TO BE INCORPORATED INTO BUILDING AUTOMATION SYSTEM FOR SECURITY, TEMPERATURE CONTROL, FIRE DETECTION, AND SUPPRESSION SYSTEMS.
- MEP CONTRACTORS ARE TO COORDINATE WITH ALL OWNER-FURNISHED AND CONTRACTOR-FURNISHED APPLIANCES AND EQUIPMENT TO PROVIDE ANY SPECIAL CONNECTIONS AS REQUIRED.
- ALL PROPOSED DEVICES SHALL BE SUBMITTED TO THE ARCHITECT FOR THE SELECTION OF COLOR FROM THE MANUFACTURER'S AVAILABLE COLOR PALETTE.
- MEP CONTRACTORS ARE TO VERIFY W/ OWNER PRIOR TO CONSTRUCTION FOR OWNER-REQUIRED LABELING INCLUDING BUT NOT LIMITED TO ACCESS PANELS, OUTLET CIRCUITS, AND LABELING OF CEILING GRID FOR EQUIPMENT ACCESS POINTS

MECHANICAL/HVAC GENERAL NOTES:

- PROVIDE 24/7 COOLING IN ALL INFORMATION TECHNOLOGY (IT)/SERVER ROOMS. VERIFY HEATING LOADS W/ OWNER. THERMOSTAT LOCATIONS ARE TO BE REVIEWED WITH OWNER DURING THE DESIGN PHASE. VERIFY PROPOSED LOCATIONS ARE
- NOT NEAR HEAT-GENERATING EQUIPMENT.
- MECHANICAL DESIGNER TO VERIFY ROOM AND EQUIPMENT HUMIDITY REQUIREMENTS W/ OWNER AND APPLICABLE LOCAL, STATE, AND FEDERAL CODES PRIOR TO DESIGN.
- MECHANICAL DESIGNER TO VERIFY ACCESS LOCATION REQUIREMENTS FOR MAINTENANCE W/ OWNER AND APPLICABLE LOCAL, STATE, AND FEDERAL CODES PRIOR TO DESIGN. LOCATIONS SHOULD NOT BE ABOVE OR INSIDE SENSITIVE ROOMS AS DETERMINED BY THE OWNER.
- MECHANICAL DESIGNER SHALL VERIFY WITH OWNER FOR BUILDING AUTOMATION SYSTEM REQUIREMENTS PRIOR TO

PLUMBING GENERAL NOTES

- NO PLUMBING OR PIPING SHOULD BE LOCATED ABOVE INFORMATION TECHNOLOGY (IT)/SERVER ROOMS OR ELEVATOR EQUIPMENT ROOMS
- PLUMBING DESIGNER TO COORDINATE LOCATION OF ALL FLOOR AND HUB DRAINS W/ ARCHITECT PRIOR TO CONSTRUCTION
- NOT USED.

PROVIDE 'HANDILAV-GUARD' INSULATION KITS BY TRUEBRO INC OR EQUAL AT ALL ADA ACCESSIBLE LAVATORIES WITH

FIRE PROTECTION GENERAL NOTES

EXPOSED PIPING.

OUND TRANSMISSION CLASS A. NOT USED.

ELECTRICAL GENERAL NOTES

ALL ELECTRICAL DEVICES, FIXTURES, CONTROLS, AND RELATED DEVICES SHALL BEAR APPROVAL OF UNDERWRITER'S LABORATORIES AND SHALL BE INSTALLED IN ACCORDANCE WITH ALL STATE, LOCAL, FEDERAL AND MANUFACTURER'S REQUIREMENTS.

- NOT USED. TEMPERATURE OR TEMPORARY B.
 - ALL DATA OUTLETS TO BE PROVIDED WITH MINIMUM TWO PORTS UNLESS NOTED OTHERWISE
 - ELECTRICAL PANEL LABELING SHALL BE TYPEWRITTEN.
 - ELECTRICAL DESIGNER TO COORDINATE ALL RECESSED OR SEMI-RECESSED EQUIPMENT LOCATIONS AND WALL THICKNESS WITH ARCHITECT PRIOR TO CONSTRUCTION
 - ELECTRICAL DESIGNER TO COORDINATE POWER, FIRE ALARM, AND SECURITY REQUIREMENTS WITH DOOR HARDWARE
 - ELECTRICAL DESIGNER SHALL PROVIDE IN-WALL CONDUIT, BACKBOXES, AND CABLE TRAYS FOR LOW VOLTAGE/DATA. COORDINATE W/ OWNER AND LOW VOLTAGE INSTALLER
 - ELECTRICAL DESIGNER SHALL VERIFY OWNER REQUIREMENTS FOR LIGHTING TIMERS, CONTROLS, AND SWITCH LOCATIONS W/ OWNER PRIOR TO CONSTRUCTION
 - ALL OUTLETS TO BE TAMPER-RESISTANT.
 - ALL RECEPTICLES SHALL BE LABELED WITH THE PANELBOARD DESIGNATION AND CIRCUIT NUMBER. LABELS SHALL BE 3/16" BLACK LETTERS ON CLEAR BACKGROUND
 - K. NOT USED.

GENERAL NOTES:

- ALL WORK UNDER THIS CONTRACT SHALL BE PERFORMED IN STRICT COMPLIANCE WITH ALL LOCAL CODES, ORDINANCES AND REGULATIONS OF THE GOVERNMENT AUTHORITIES HAVING JURISDICTION.
- THE GENERAL CONTRACTOR & DESIGN/BUILD CONTRACTORS SHALL BE RESPONSIBLE FOR ALL APPLICABLE FEES AND PERMITS FOR THIS PROJECT IN ACCORDANCE WITH REQUIREMENTS AND PROCEDURES OF ANY AND ALL AUTHORITIES HAVING JURISDICTION. EACH DESIGN/BUILD CONTRACTOR SHALL BE RESPONSIBLE FOR ALL REQUIRED DRAWINGS, CALCULATIONS, FEES, AND PERMITS PERTAINING TO THE WORK UNDER THEIR CONTRACT. DESIGN AND CONSTRUCTION DRAWINGS SHALL BE SUBMITTED TO OWNER & PROJECT DESIGNER FOR REVIEW AND APPROVAL PRIOR TO THE COMMENCEMENT OF WORK. ALL PERMITS, INSPECTION REPORTS, AND CERTIFICATES OF INSURANCE ARE TO BE TURNED OVER TO OWNER.
- GENERAL CONTRACTOR & THEIR SUBCONTRACTORS SHALL CAREFULLY REVIEW THE ENTIRE SET OF CONSTRUCTION DOCUMENTS, CONDITIONS REPORTS, EXISTING JOB SITE CONDITIONS AND DIMENSIONS PRIOR TO THE BIDDING, FABRICATION, AND COMMENCEMENT OF WORK. ANY DISCREPANCIES, CONCERNS, OR DEVIATIONS FROM MANUFACTURER STANDARD INSTALLATION REQUIREMENTS MUST BE PROMPTLY REPORTED TO THE ARCHITECT. GENERAL CONTRACTOR SHALL FIELD VERIFY AND COORDINATE WORK PERFORMED BY ALL TRADES.
- THE GENERAL CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR ALL CONSTRUCTION MEANS AND METHODS, TECHNIQUES & SEQUENCES OF PROCEDURES, AND FOR COORDINATING ALL PORTIONS OF THE WORK UNDER THEIR CONTRACT, CONTRACTS WITH THEIR SUB-CONTRACTORS, AND ANY OWNER VENDORS. THE GENERAL CONTRACTOR'S SCHEDULE SHALL BE COORDINATED WITH OWNER TO ENSURE UNINTERRUPTED POWER, TELEPHONE ACCESS TO EQUIPMENT, AND ACCESS TO ESSENTIAL SPACES. INSTALL TEMPORARY BARRIERS AS REQUIRED TO PROTECT OCCUPANTS AND COMPLY WITH APPLICABLE GOVERNING CODES.
- THE GENERAL CONTRACTOR SHALL BE SOLELY AND COMPLETELY RESPONSIBLE FOR CONDITION OF THE JOB SITE. THE SAFETY OF ALL PERSONS AND PROPERTY DURING THE PERFORMANCE OF THE WORK SHALL APPLY CONTINUOUSLY AND NOT BE LIMITED TO NORMAL WORKING HOURS.
- THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR MEETING THE PROJECT SCHEDULE. PRIOR TO THE START OF THE PROJECT, CONTRACTOR SHALL VERIFY LEAD TIMES OF FINISH MATERIALS AND SPECIAL ITEMS TO ASSURE AVAILABILITY AS SCHEDULE REQUIRES.
- ALL WORK PERFORMED (LABOR AND MATERIALS) SHALL BE GUARANTEED FOR ONE (1) YEAR, STARTING FROM THE DATE OF SUBSTANTIAL COMPLETION OR AS REQUESTED BY OWNER
- CONTRACTOR SHALL COORDINATE WITH THE WORK OF OTHERS NOT INCLUDED IN THE THIS CONTRACT AS DIRECTED BY
- DO NOT SCALE THE DRAWINGS. IF A CONTRADICTION OCCURS WITHIN THE CONTRACT DOCUMENTS OR INFORMATION IS UNCLEAR, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT FOR CLARIFICATION.
- THE GENERAL CONTRACTOR SHALL PROTECT ALL EXISTING FINISHES (WALLS, FLOORING, CEILING, ETC.) ON ADJACENT SURFACES AND OTHER BUILDING AREAS FROM DAMAGE RESULTING FROM THIS WORK. PATCH, REPAIR, OR REPLACE TO ORIGINAL CONDITION UPON COMPLETION (AT NO) ADDITIONAL COST TO OWNER. PATCH ALL EXISTING WALLS & FINISHES AFFECTED BY DEMOLITION AS REQUIRED.
- NO WORK DEFECTIVE IN CONSTRUCTION, QUALITY OR DEFICIENT IN ANY REQUIREMENT OF DRAWINGS AND SPECIFICATIONS WILL BE ACCEPTABLE REGARDLESS OF OWNER'S, TENANT'S OR ARCHITECT'S FAILURE TO DISCOVER OR TO POINT OUT DEFECTS OR DEFICIENCIES DURING CONSTRUCTION. DEFECTIVE WORK FOUND WITHIN TIME LIMITATIONS ALLOWED BY GUARANTEES SHALL BE REPLACED BY WORK CONFORMING WITH INTENT OF CONTRACT.
- OWNER TO PROVIDE ASBESTOS REPORT TO GENERAL CONTRACTOR, IF AVAILABLE. GENERAL CONTRACTOR IS TO CONTACT A QUALIFIED PROFESSIONAL TO ASSESS THE EXISTENCE OF HAZARDOUS MATERIAL, I.E. LEAD PAINT, ASBESTOS ETC. AND TO RECOMMEND ANY CORRECTIVE ACTION. PROVIDE COST TO COMPLETE RECOMMENDED WORK, IF ANY.
- GENERAL CONTRACTOR IS RESPONSIBLE TO INCLUDE ALL DEMOLITION, CONSTRUCTION, FINISH WORK AND ALIKE, REQUIRED BY MEP INSTALLATIONS.
- THE GENERAL CONTRACTOR IS RESPONSIBLE FOR THE COORDINATION AND NOTIFICATION TO BUILDING OWNER AND OTHER APPROPRIATE AUTHORITIES OF ANY BUILDING SYSTEM SHUT DOWN.
- THE USE OF THE WORD "PROVIDE" IN CONNECTION WITH ANY ITEM SPECIFIED IS INTENDED TO MEAN THAT SUCH SHALL BE
- FURNISHED, INSTALLED, AND CONNECTED, WHERE SO REQUIRED, EXCEPT AS NOTED OTHERWISE. THE WORD ALIGN AS USED IN THESE DOCUMENTS SHALL MEAN TO ACCURATELY LOCATE FINISH FACES IN THE SAME
- PLANE. Q. "TYPICAL" (OR TYP.) AS USED IN THESE DOCUMENTS SHALL MEAN THAT THE CONDITION IS THE SAME OR REPRESENTATIVE
- FOR ALL SIMILAR CONDITIONS U.N.O. GENERAL CONTRACTOR IS TO RECEIVE AND INSTALL APPLIANCES AS REQUIRED.
- THE TERMS LANDLORD AND OWNERS ARE USED INTERCHANGEABLY
- LOW VOLTAGE CABLING SHOULD BE INSTALLED IN ALL RATED WALL PENETRATIONS USING HILTI SPEED SLEEVE FIRESTOPPING SYSTEMS. GENERAL CONTRACTOR TO COORDINATE W/ LOW VOLTAGE SUPPLIER FOR LOCATIONS




N58 W6181 COLUMBIA RD. P.O. BOX 332 CEDARBURG, WISCONSIN 53012 PH. (262) 377-8001 FX. (262) 377-8003

ST. PAUL **LUTHERAN** PHASE 1 -**RENOVATION**


525 SUPERIOR


TOMAH, WI 54660

NO. REV. DATE DESCRIPTION

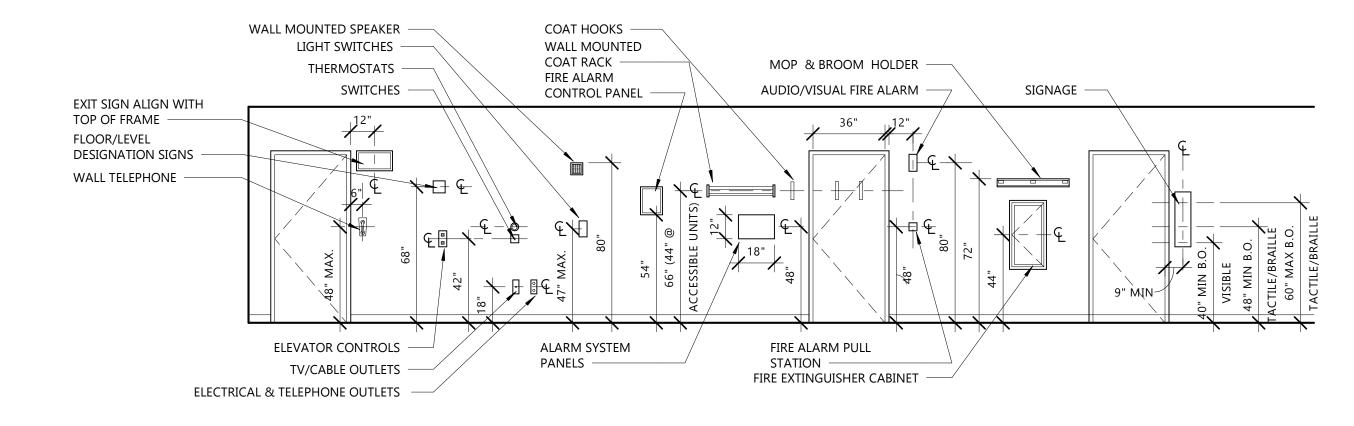

TYPICAL MOUNTING HEIGHTS *FOR REFERENCE ONLY - DOES NOT INDICATE EQUIPMENT OR FIXTURES TO BE PROVIDED

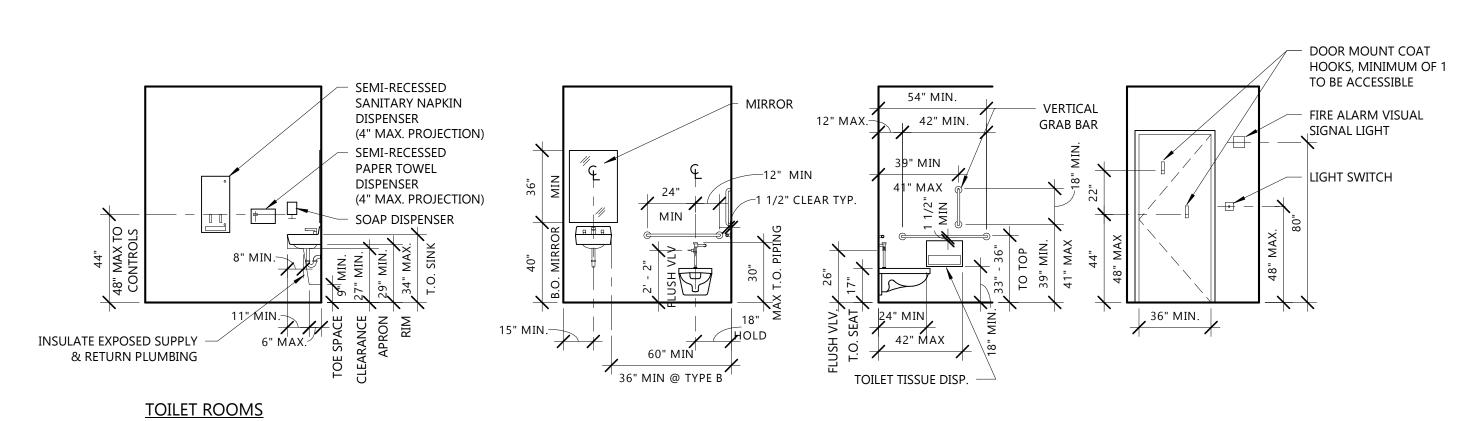

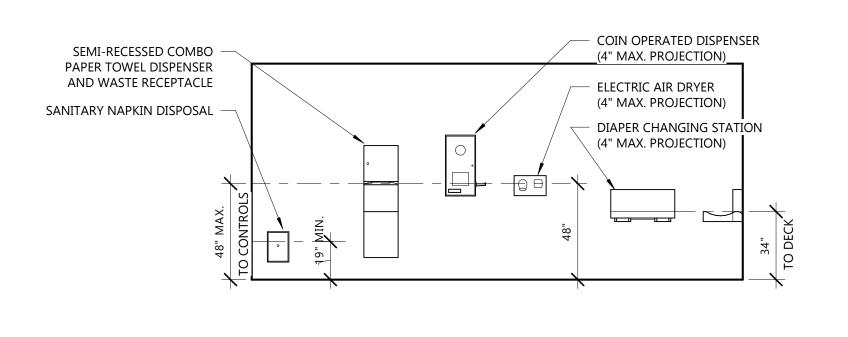


MISC. ACCESSORY MOUNTING HEIGHTS

ACCESSIBLE CLEARANCES & HEIGHTS

*FOR REFERENCE ONLY - DOES NOT INDICATE EQUIPMENT OR FIXTURES TO BE PROVIDED

1/4" = 1'-0"

1/4" = 1'-0"

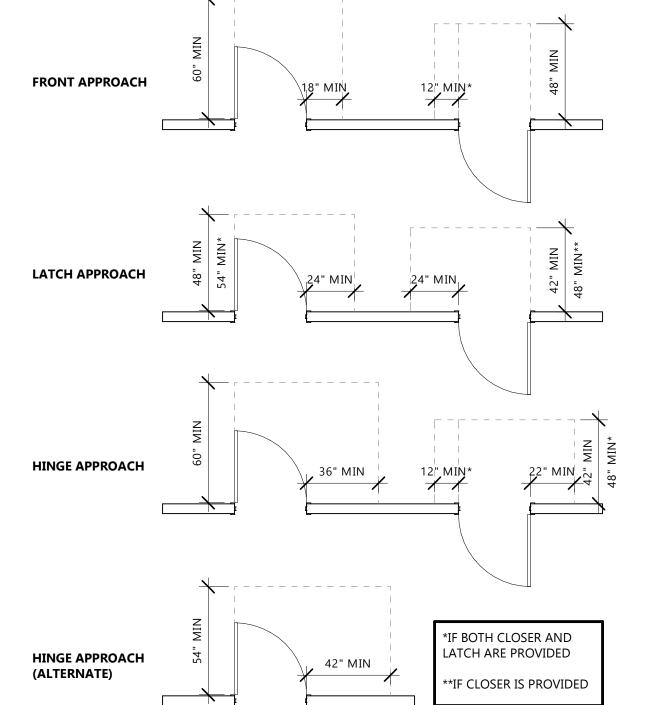

PULL SIDE

PUSH SIDE

ACCESSIBLE DOOR CLEARANCES


1/4" = 1'-0"


Project No. 22.009 SHEET TITLE **GENERAL INFORMATION**

PROJECT INFO

08.22.23

G002

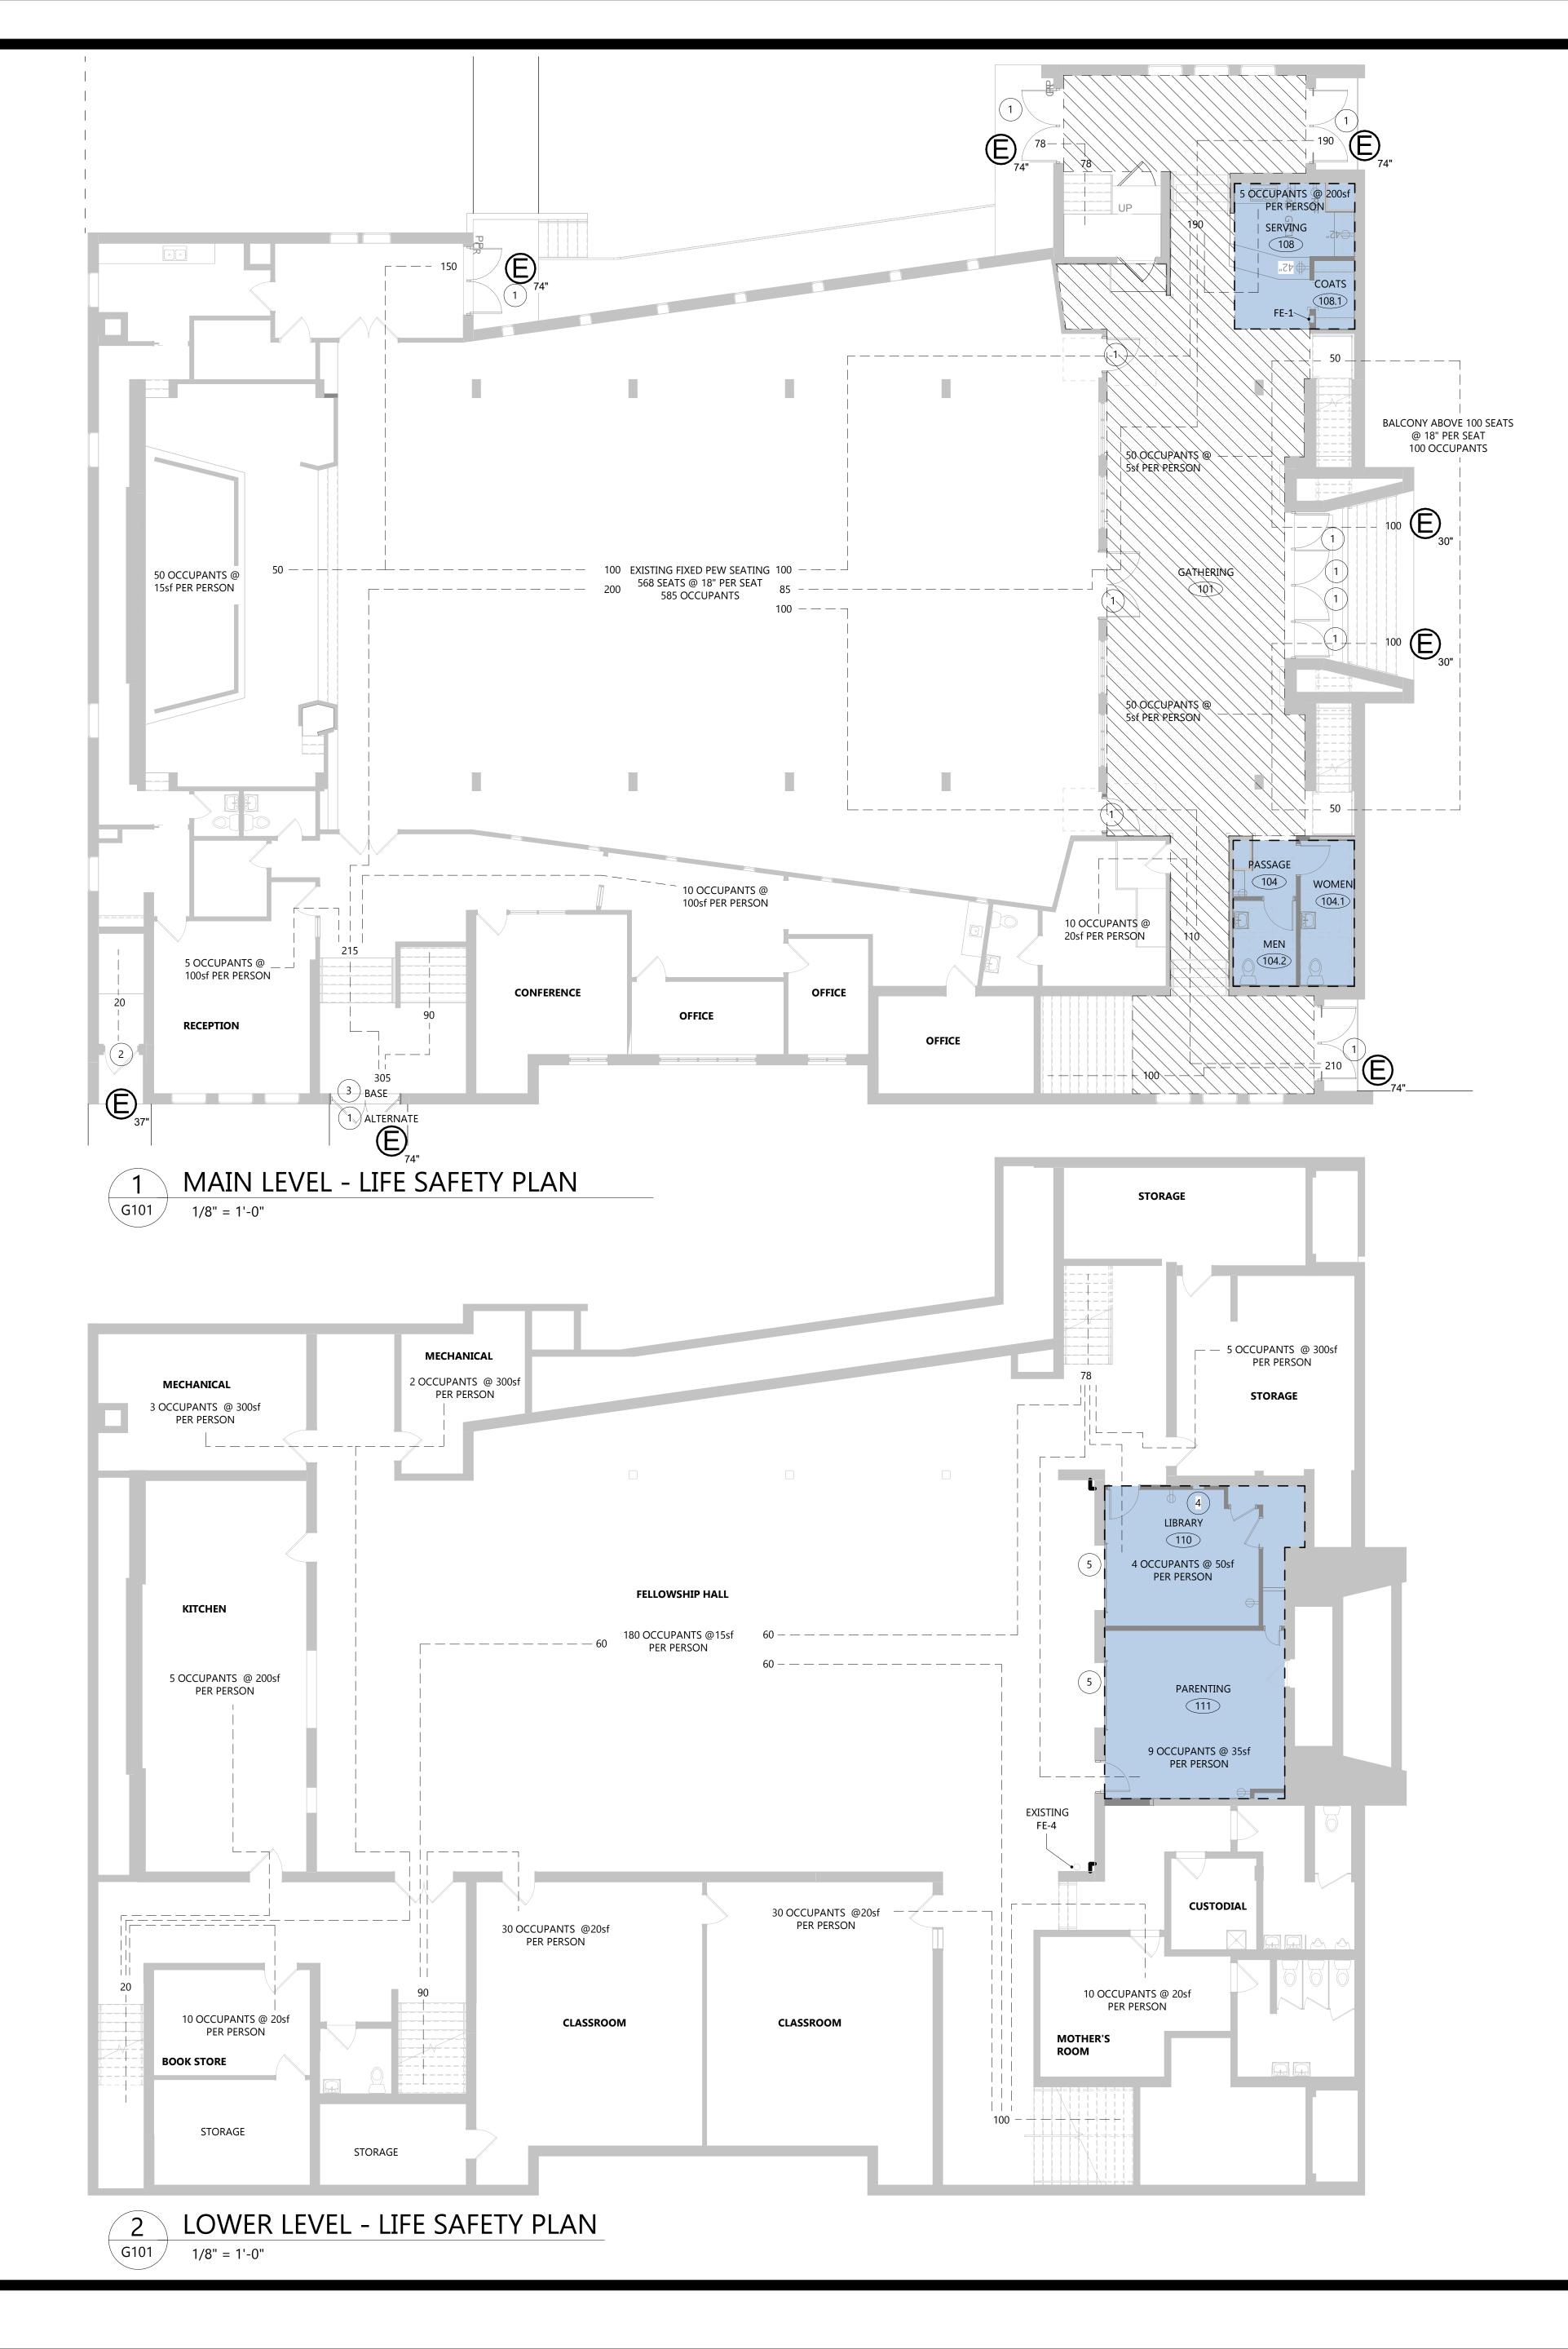

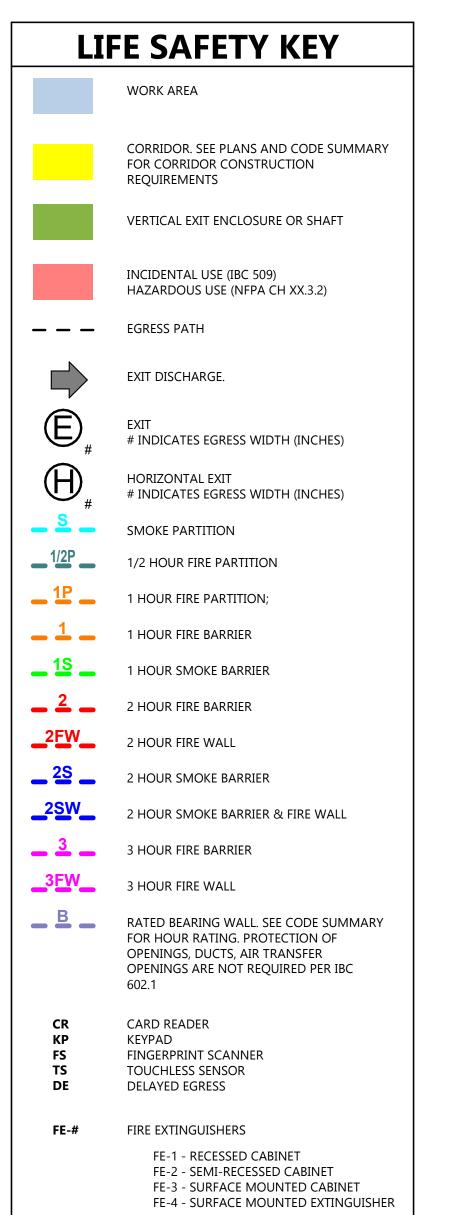

TA	AG #	DESCRIPTION
1		REPLACE EXISTING DOOR AND FRAME. EGRESS
		CAPACITY TO REMAIN UNCHANGED.
2		EXISTING DOOR AND FRAME TO REMAIN.

KEYED LIFE SAFETY PLAN NOTES

EXISTING DOOR AND FRAME TO REMAIN.
EXISTING DOOR REMAIN. REPLACE EXISTING FRAME.
EXISTING ELECTRICAL PANEL TO REMAIN. PROVIDE
36"X36" CLEAR FLOOR SPACE IN FRONT OF PANEL.
NEW OVERHEAD DOOR

CODE SUMMARY

GOVERNING CODES:

WISCONSIN COMMERCIAL BUILDING CODE
2015 INTERNATIONAL EXISTING BUILDING CODE (IEBC)
2015 INTERNATIONAL BUILDING CODE (IBC)
2015 INTERNATIONAL ENERGY CONSERVATION CODE (IECC)
2009 ANSI A117.1

OCCUPANCY GROUP (IBC Chapter 3):

GROUP A-3: ASSEMBLY

TYPE OF CONSTRUCTION (IBC Chapter 6):

TYPE III-B

FIRE RATING REQUIREMENTS FOR BUILDING ELEMENTS (IBC Table 601):

TYPE III-B

STRUCTURAL FRAME	0 HOURS
BEARING WALLS - EXTERIOR	2 HOURS
BEARING WALLS - INTERIOR	0 HOURS
NONBEARING WALLS & PARTITIONS (EXT)	0 HOURS
NONBEARING WALLS & PARTITIONS (INT)	0 HOURS
FLOOR CONSTRUCTION	0 HOURS
ROOF CONSTRUCTION	0 HOURS

FIRE PROTECTION SYSTEMS (IBC CHAPTER 903.2 & 907.2):

AUTOMATIC SPRINKLER SYSTEM FIRE ALARM SYSTEM	NA NA
NOT REQUIRED PER IEBC 803.2.2	

OCCUPANCY LOAD (IBC Table 1004.1.2):

NO INCREASE IN OCCUPANCY

EGRESS WIDTH (IBC 1005.1):

NO CHANGE IN EGRESS WIDTH. EXTERIOR DOORS TO BE REPLACED AS A MAINTENANCE ITEM.

TOTAL EGRESS CAPACITY: 2,150 OCCUPANTS - 467" ACTUAL EGRESS LOAD: 1,220 OCCUPANTS - 244"

EXIT ACCESS TRAVEL DISTANCE (IBC Table 1017.2):

NO CHANGE

RENOVATION AREA (IEBC CH 5):

IEBC LEVEL OF ALTERATION: LEVEL 1

MAIN LEVEL RENOVATION SQFT: 1,700 SQFT 16%
MAIN LEVEL EXISTING OVERALL SQFT: 10,656 SQFT

IEBC LEVEL OF ALTERATION: LEVEL 2

LOWER LEVEL RENOVATION SQFT: 588 SQFT (5,880 CUFT) 5.5% LOWER LEVEL EXISTING OVERALL SQFT: 10,750 SQFT MAIN LEVEL RENOVATION SQFT: 368 SQFT (3,680 CUFT) 3.45% MAIN LEVEL EXISTING OVERALL SQFT: 10,656 SQFT

MINIMUM PLUMBING FIXTURES (IBC TABLE 2902.1):

NO CHANGE IN OCCUPANT LOAD. (2) WATER CLOSETS AND LAVATORIES ADDED FOR CONVENIENCE.

GROTH Design Groun

N58 W6181 COLUMBIA RD. P.O. BOX 332 CEDARBURG, WISCONSIN 53012

PH. (262) 377-8001 FX. (262) 377-8003

PRO IFC

ST. PAUL LUTHERAN PHASE 1 -RENOVATION

525 SUPERIOR AVE

TOMAH, WI 54660

ISSUE

NO. REV. DATE DESCRIPTION

PROJECT INFO

Date 08.22.23

Project No.


SHEET TITLE


CODE INFORMATION

G101

GIUI

/2023 9:12:08 AM

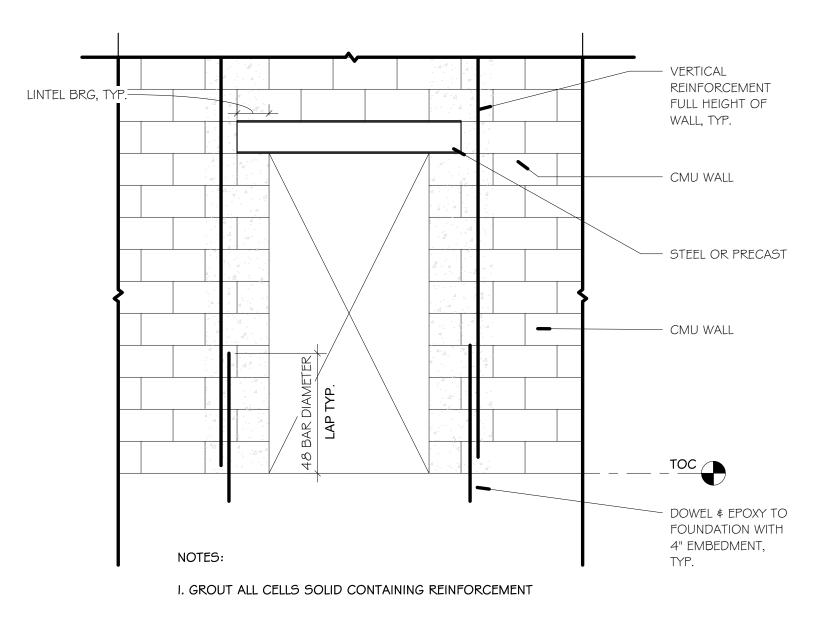

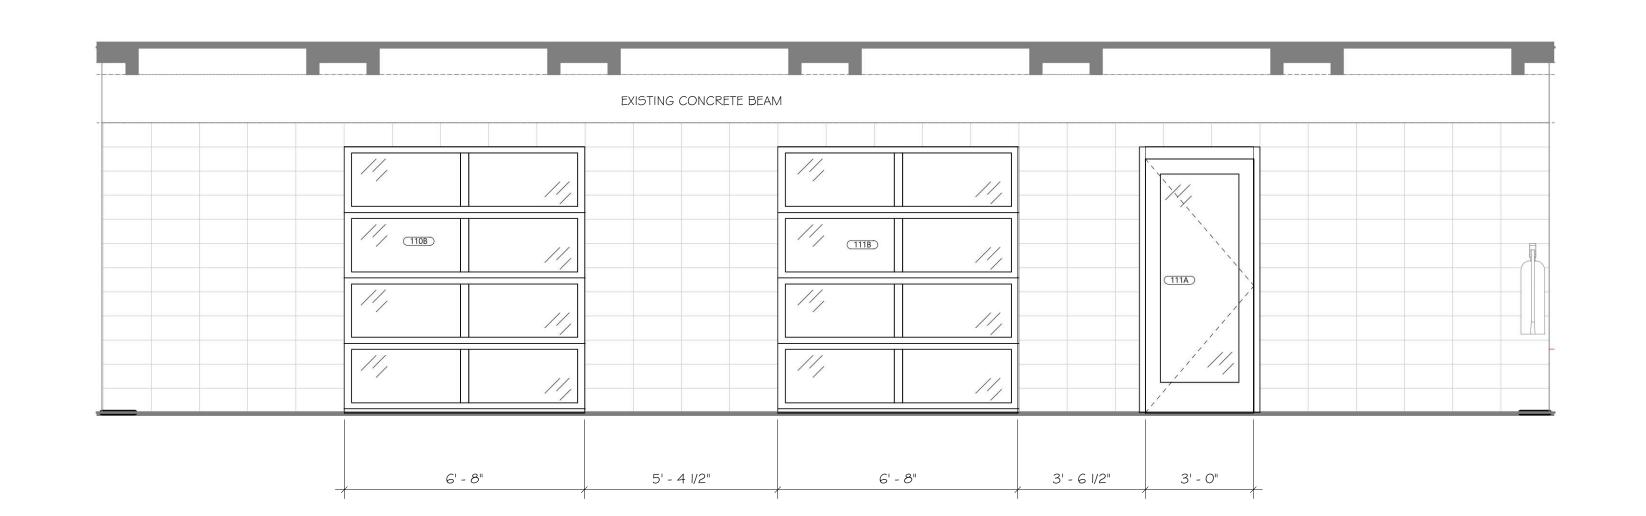

GROUT SMOOTH AND -

LEVEL AT BEAM BRG.

2 CMU LINTELS BEARING
NOT TO SCALE


CMU LINTEL DETAILS


NOT TO SCALE


FULLY GROUTED FROM -


3 CMU WALL DOOR OPENING W/ STEEL

SCALE: 3/16" = 1'-0" on $11" \times 17"$ 3/8" = 1'-0" on 22" x 34"

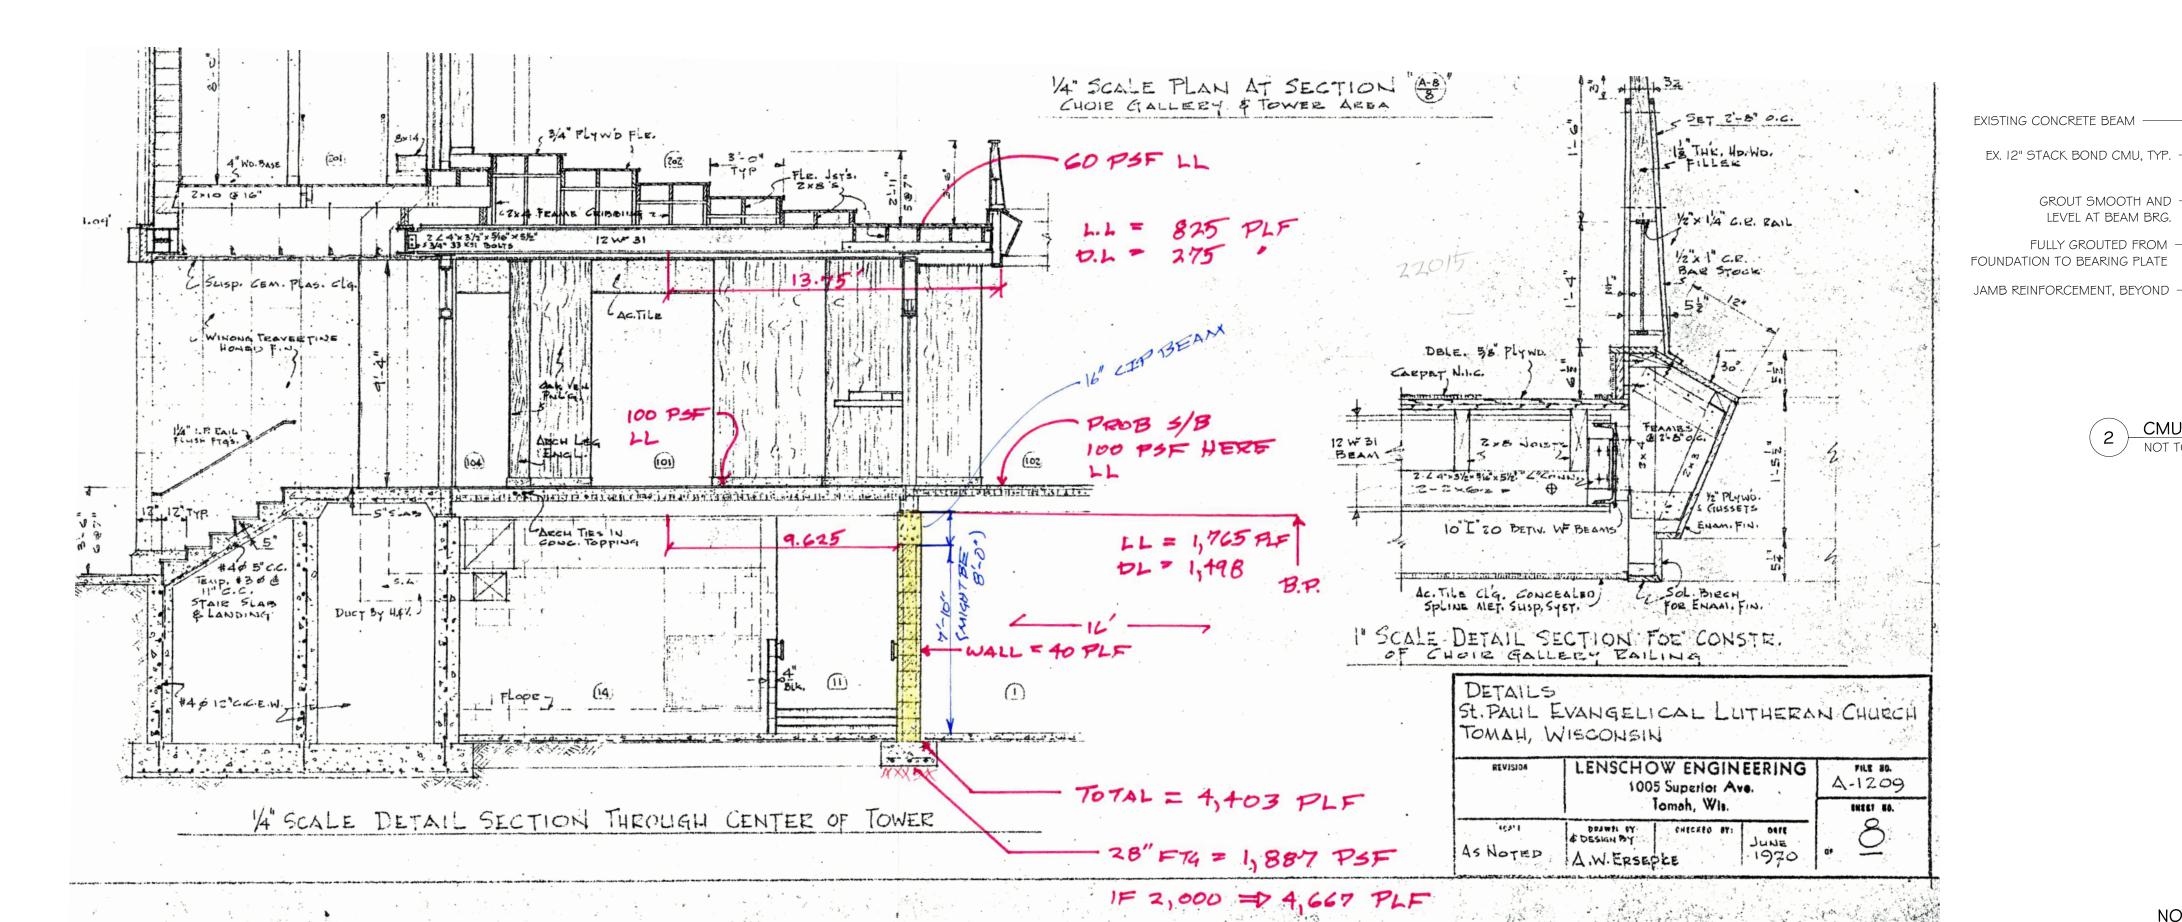

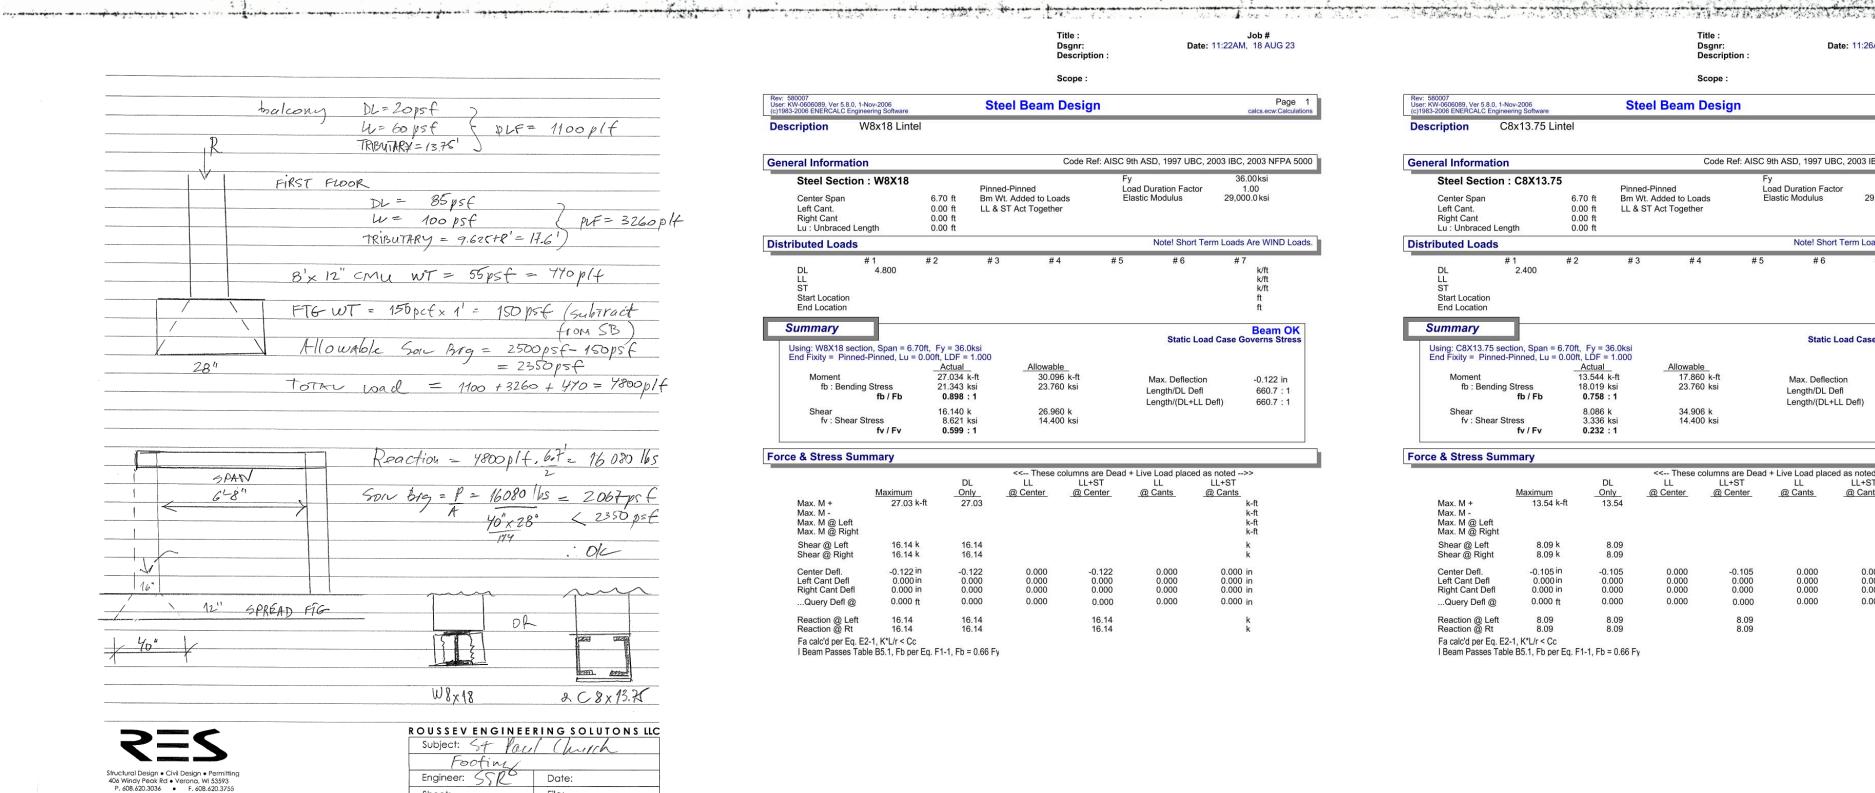

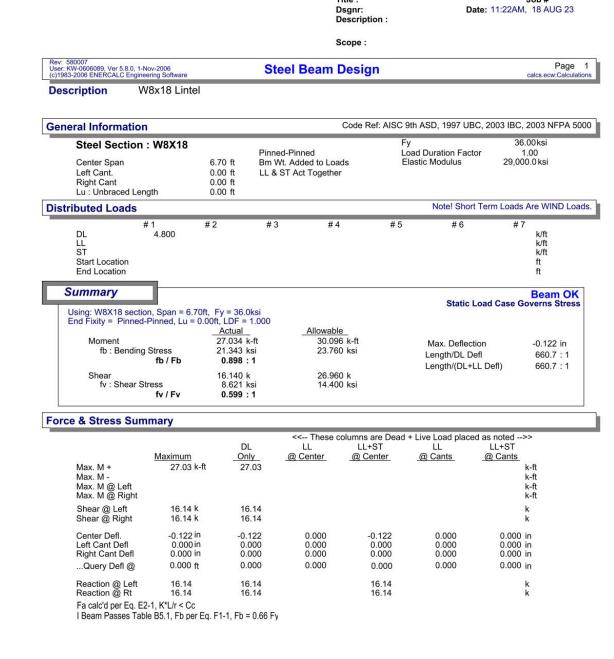

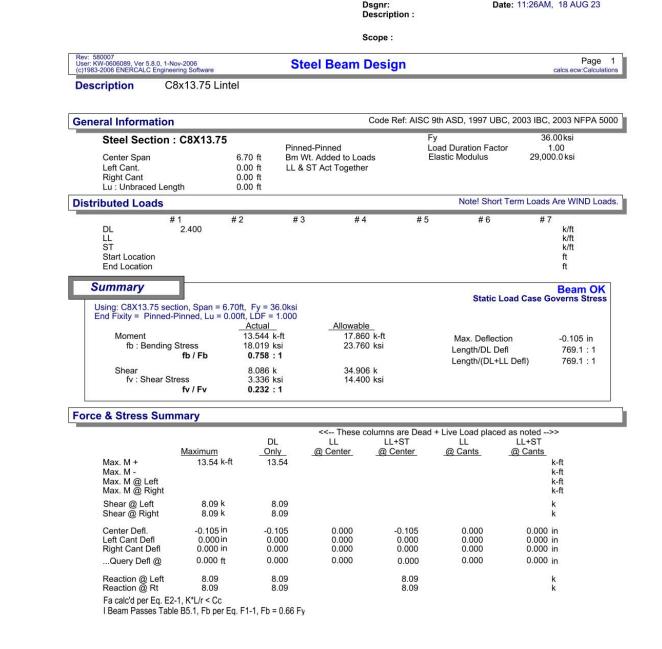

MATERIAL DESIGN PROPERTIES:

CONCRETE PROPERTIES:

I. ALL CONCRETE DESIGN AND CONSTRUCTION SHALL CONFORM TO THE LOCAL BUILDING CODE REQUIREMENTS AND THOSE OF THE LATEST EDITION OF THE FOLLOWING STANDARDS: ACI 318, ACI 315, ACI 301, AND ACI 305 \$ 306.

USE	28 DAY STRENGTH	MIN. H2O /CEMENT RATIO	SLUMP (INCHES)	MAX. AGGREGATE SZ.
INTERIOR FLOORS	3,500 PSI	.62	3 ±1	3/4
WALLS	3,500 PSI	.62	3 ±1	3/4
PIERS	3,500 PSI	.62	3 ±1	3/4
FOOTINGS	3,500 PSI	.62	3 ±1	1-1/2
EXTERIOR FLOORS	4,000 PSI	.48	4 ±1	3/4

ALL CONCRETE SUBJECT TO EXTERIOR EXPOSURE SHALL BE AIR ENTRAINED TO 6% (+/- I.5%) AND HAVE A MAXIMUM 3/4" AGGREGATE. ALL CONCRETE WITHOUT UPERPLASTICIZERS SHALL HAVE A MAXIMUM SLUMP OF 4" ±

fy = 60,000 PSI

fy = 65,000 PSI

REINFORCING STEEL STRENGTHS:

BARS (ASTM AGI5, GRADE 60)

WELDED WIRE MESH (ASTM A 185)

STRUCTURAL STEEL STRENGTHS

W SHAPES (ASTM A992, GR50) fy = 50,000 PSIANGLES, CHANNELS, PLATES, & BARS (ASTM A36) $f_y = 36,000 \text{ PSI}$ SQUARE & RECTANGULAR TS OR HSS SECTIONS (ASTM A500 ,GR B) fy = 42,000 PSI HIGH STRENGTH BOLTS (ASTM A325)

MASONRY NOTES

— 3/4" THREADED STUD WELDED TO BEARING PLATE TIGHTEN NUT FINGER TIGHT & TACK WELD

LONG SLOTED HOLE (13/16XI 7/8) LENGTH

OF SLOT PARALLEL TO LENGTH OF BEAM

W8XI8 STEEL BEAM

- 3/8" LINTEL PLATE

- I/2" DIA. STUD

FACE OF MASONRY

SIDE ELEVATION

/ W8 x I8 STL. BEAM

TO STL. BEAM

— GROUT CORES FULL, TYP.

— CONT. II I/2" x I/4" STL. PLATE WELDED

EXISTING CONCRETE BEAM

BEARING IS SHOWN ---

FULLY GROUTED

AT 2 CELL CONDITION

<u>LINTEL "LI"</u>

12" NOMINAL

NOTE: ALL LINTELS SHALL HAVE A MINIMUM OF 4" BEARING, TYP.

I. MASONRY CONSTRUCTION MUST BE IN ACCORDANCE WITH "BUILDING CODE REQUIREMENTS FOR MASONRY STRUCTURES" (TMS 402-16) AND "SPECIFICATION FOR MASONRY STRUCTURES" (TMS 602-16).

- DESIGN MASONRY ASSEMBLAGE STRENGTH, f'm = 2,000 PSI. NET AREA COMPRESSIVE STRENGTH OF CONCRETE MASONRY UNITS MUST BE A MINIMUM OF 2,000 PSI.
- CONCRETE MASONRY UNITS MUST CONFORM TO ASTM C90 AND BE MANUFACTURED WITH NORMAL WEIGHT AGGREGATE.
- 4. GROUT MUST CONFORM TO ASTM C476 AND MUST NOT CONTAIN ADMIXTURES. GROUT MUST ATTAIN A MINIMUM 28-DAY COMPRESSIVE STRENGTH OF 3,000 PSI.
- 5. REINFORCEMENT MUST BE DEFORMED BARS CONFORMING TO ASTM AGI5/AGI5M, GRADE GO AND MUST HAVE FABRICATION TOLERANCES IN ACCORDANCE WITH ACI 315. SHOP FABRICATE REINFORCING BARS WHICH ARE INDICATED TO BE BENT OR HOOKED.
- PROVIDE GALVANIZED HORIZONTAL JOINT REINFORCEMENT. LOCATE JOINT REINFORCEMENT IG INCHES ON CENTER VERTICALLY AND ADDITIONALLY AT THE TOP OF ALL FOUNDATIONS AND IN THE TWO JOINTS IMMEDIATELY ABOVE AND BELOW ALL OPENINGS, EXTENDING A MINIMUM OF 24 INCHES BEYOND THE JAMB ON EACH SIDE.
- 7. PLACE PIPES AND CONDUITS PASSING HORIZONTALLY THROUGH MASONRY IN STEEL OR PVC SLEEVES OR CORED HOLES UNLESS OTHERWISE INDICATED ON THE DRAWINGS.
- ALUMINUM CONDUITS, PIPES, AND ACCESSORIES MUST NOT BE EMBEDDED II MASONRY GROUT, OR MORTAR, UNLESS EFFECTIVELY COATED OR COVERED WITH ASTM DII87, ASPHALT-BASE EMULSION, TO PREVENT ALUMINUM-CEMENT CHEMICAL REACTION OR ELECTROLYTIC REACTION BETWEEN ALUMINUM AND
- UNLESS OTHERWISE NOTED OR DETAILED, CENTER WALL REINFORCEMENT IN BLOCK CELLS. USE NONMETALLIC BAR POSITIONERS. VERTICAL BARS SHALL BE HELD IN POSITION AT TOP AND BOTTOM AND AT INTERVALS NOT EXCEEDING 4
- 10. PROVIDE DOWEL REINFORCEMENT FROM WALLS INTO FOUNDATION OF SAME SIZE AND SPACING AS VERTICAL WALL REINFORCEMENT. SEE SHEET TABLE BELOW FOR REINFORCEMENT LAP LENGTHS.
- II. ALL MASONRY BOND BEAMS, LINTELS AND BLOCKS WITH EMBEDDED ANCHOR BOLTS MUST BE FILLED WITH 3000 PSI GROUT.
- 12. PROVIDE SHOP DRAWINGS WHICH INDICATE SIZE, SPACING, BENDING DETAILS, AND TYPE OF ALL REINFORCING BARS PLACED IN MASONRY WALLS. COMPLY WITH ACI 315, "DETAILS AND DETAILING OF CONCRETE REINFORCEMENT." PROVIDE ELEVATIONS OF ALL REINFORCED WALLS SHOWING LOCATIONS OF ALL HORIZONTAL AND VERTICAL DEFORMED BAR REINFORCING, DEPTH/WIDTH OF GROUTING, AND DIMENSIONED LOCATIONS OF CONTROL JOINTS. INCOMPLETE SUBMITTALS WILL BE REJECTED WITHOUT REVIEW.
- 13. THE LOCATIONS OF ALL OPENINGS, BOND AND LINTEL BEAMS, AND THE REINFORCEMENT MUST BE SHOWN ON THE SHOP DRAWINGS.
- 14. EXTEND ALL VERTICAL REINFORCEMENT THRU MID-HEIGHT BOND BEAMS. EXTEND VERTICAL REINFORCING INTO BOND BEAMS AT TOP OF WALL AND TERMINATE AT 2" DOWN FROM TOP OF WALL.
- 15. GROUT ALL CELLS OF CONCRETE MASONRY UNITS BELOW GRADE.

		ARS IN FULLY GROUTED CELLS)
BAR SIZE	LAP LENGTH	
#3	2'-0"	
#4	2'-8"	E E
#5	3'-10"	LENGTH
#6	7'-2"	A P
#7	9'-8"	
#8	15'-7"	
#9	18'-6"	

NOTES:

I. LAP SPLICE LENGTHS ARE TO BE INCREASED BY 50% WHEN EPOXY COATED REINFORCEMENT IS USED.

2. BARS LARGER THAN #9 ARE REQUIRED TO BE SPLICED BY MECHANICAL CONNECTORS.



Design Group

N58 W6181 COLUMBIA RD. P.O. BOX 332 CEDARBURG, WISCONSIN 53012

PH. (262) 377-8001 FX. (262) 377-8003

ST. PAUL **LUTHERAN** PHASE 1 -**RENOVATION**

525 SUPERIOR AVE TOMAH, WI 54660



PROJECT INFO

08.22.23 Project No.

22.009

SHEET TITLE

WALL OPENING DETAILS

S100


LINTEL CALCULATIONS





ST. PAUL **LUTHERAN** PHASE 1 -**RENOVATION**


525 SUPERIOR AVE TOMAH, WI 54660

NO. REV. DATE DESCRIPTION

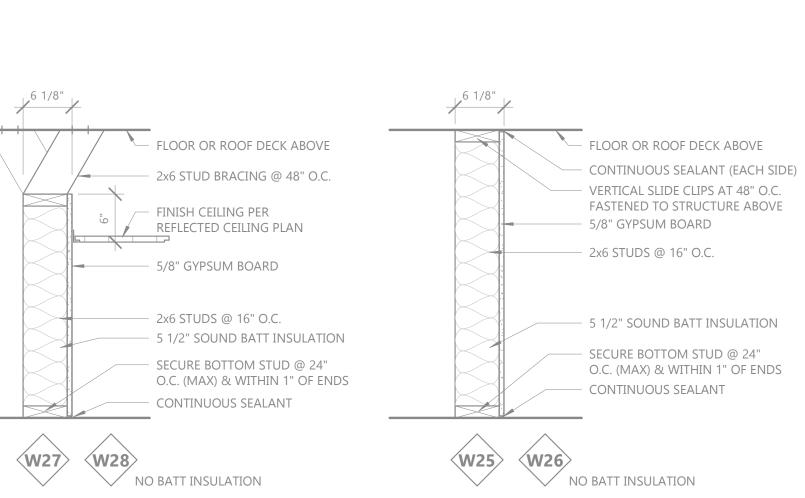

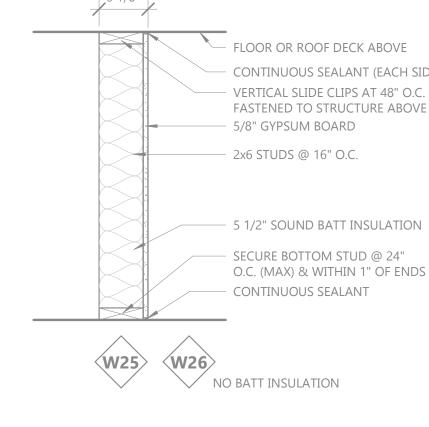

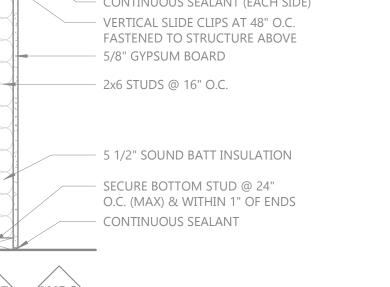

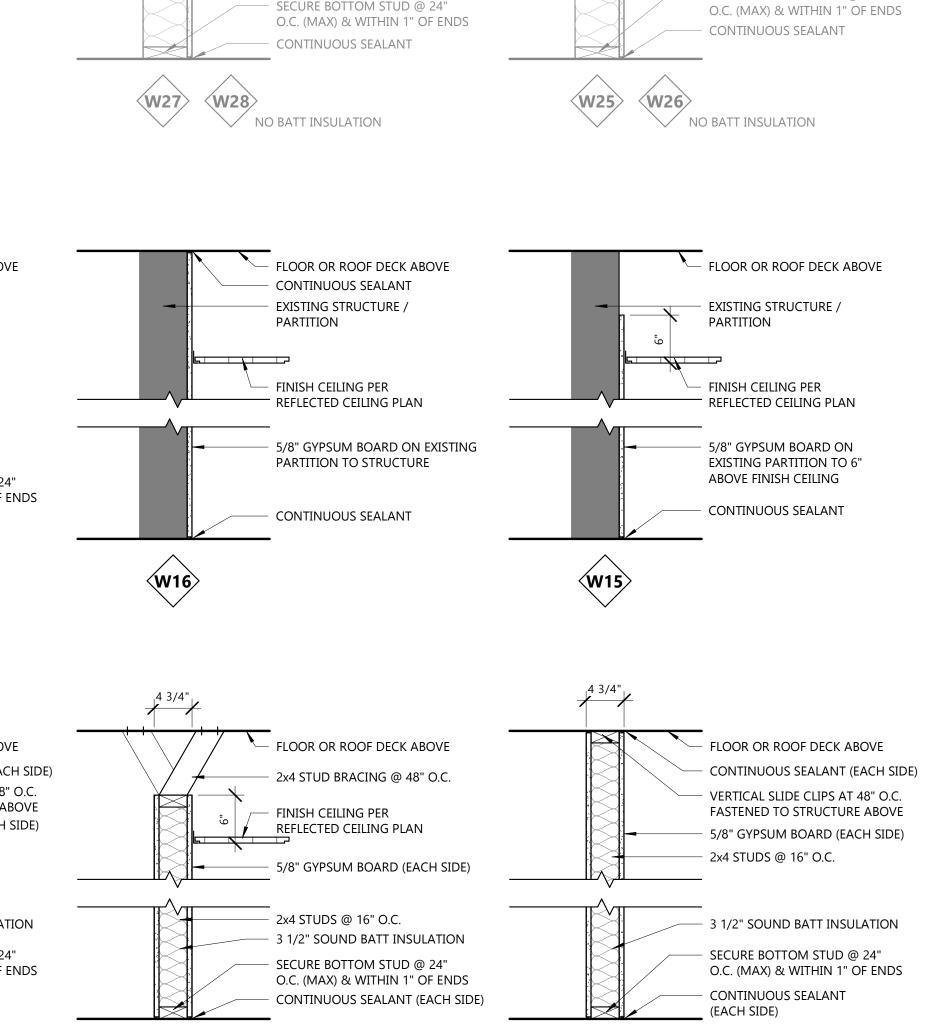

1HR FIRE PARTITION/BARRIER (UL U305) WHERE NOTED ON PLANS.





GENERAL PARTITION NOTES:

1-2 HR FIRE PARTITION/BARRIER (UL U905) 3 HR FIRE PARTITION/BARRIER (UL U904) AS NOTED ON PLANS

1" = 1'-0"

GENERAL PARTITION NOTES:

NOT ALL PARTITION TYPES MAY BE USED. SEE PLANS FOR PARTITION TYPES

NOT ALL PARTITION TYPES MAY BE USED. SEE PLANS FOR PARTITION TYPES

FLOOR OR ROOF DECK ABOVE

- BOND BEAM, SEE STRUCTURAL FOR SIZE AND CONNECTION

- 33% COMPRESSED MINERAL WOOL

- 8" NOMINAL CMU, SEE STRUCTURAL

FOR REINFORCEMENT

- CONTINUOUS SPRAY SEALANT (EACH SIDE)

SHALL BE CONTINUOUS THROUGH CONCEALED SPACES, SUCH AS THE SPACE ABOVE SUSPENDED CEILINGS

HOLD GYPSUM BOARD 1/2" FROM FINISHED FLOOR AND FLOOR OR ROOF DECK ABOVE AND PROVIDE SEALANT

CLASSROOM PARTITION

STC RATING - 51

GYPSUM BOARD TO BE TYPE X TYPICAL UNLESS NOTED AS OTHERWISE TO MEET UL LISTING

NON-RATED WALLS TO UTILIZE WATER RESISTANT, ACOUSTIC TYPE SEALANT. RATED PARTITIONS/BARRIERS TO UTILIZE APPLICABLE FIRE-STOPPING JOINT SEALANT PER UL LISTING

NON-RATED WALLS TO UTILIZE WATER RESISTANT, ACOUSTIC TYPE SEALANT. RATED PARTITIONS/BARRIERS TO UTILIZE APPLICABLE FIRE-STOPPING JOINT SEALANT PER UL LISTING

NOTED OTHERWISE. WHERE SPECIFICALLY NOTED, FIRE AND SMOKE PARTITIONS MAY EXTEND UP TO A FIRE-RESISTANCE-RATED FLOOR/CEILING OR ROOF/CEILING ASSEMBLY ABOVE

FIRE AND SMOKE PARTITIONS SHALL EXTEND FROM THE TOP OF FOUNDATION OR FLOOR/CEILING ASSEMBLY BELOW TO THE UNDERSIDE OF THE FLOOR OR ROOF SHEATHING, SLAB OR DECK ABOVE UNLESS

4. FIRE AND SMOKE BARRIERS SHALL EXTEND FROM THE TOP OF FOUNDATION OR FLOOR/CEILING ASSEMBLY BELOW TO THE UNDERSIDE OF THE FLOOR OR ROOF SHEATHING, SLAB OR DECK ABOVE. FIRE BARRIERS

FIRE AND SMOKE PARTITIONS SHALL EXTEND FROM THE TOP OF FOUNDATION OR FLOOR/CEILING ASSEMBLY BELOW TO THE UNDERSIDE OF THE FLOOR OR ROOF SHEATHING, SLAB OR DECK ABOVE UNLESS NOTED OTHERWISE. WHERE SPECIFICALLY NOTED, FIRE AND SMOKE PARTITIONS MAY EXTEND UP TO A FIRE-RESISTANCE-RATED FLOOR/CEILING OR ROOF/CEILING ASSEMBLY ABOVE.


FIRE AND SMOKE BARRIERS SHALL EXTEND FROM THE TOP OF FOUNDATION OR FLOOR/CEILING ASSEMBLY BELOW TO THE UNDERSIDE OF THE FLOOR OR ROOF SHEATHING, SLAB OR DECK ABOVE. FIRE BARRIERS

2HR FIRE PARTITION/BARRIER

(UL U301) WHERE NOTED ON

PLANS.

SHALL BE CONTINUOUS THROUGH CONCEALED SPACES, SUCH AS THE SPACE ABOVE SUSPENDED CEILINGS PROVIDE TILE BACKER BOARD IN LIEU OF GYPSUM BOARD AT ALL TILE LOCATIONS. COORDINATE LOCATIONS W/ FINISH PLANS & SCHEDULES

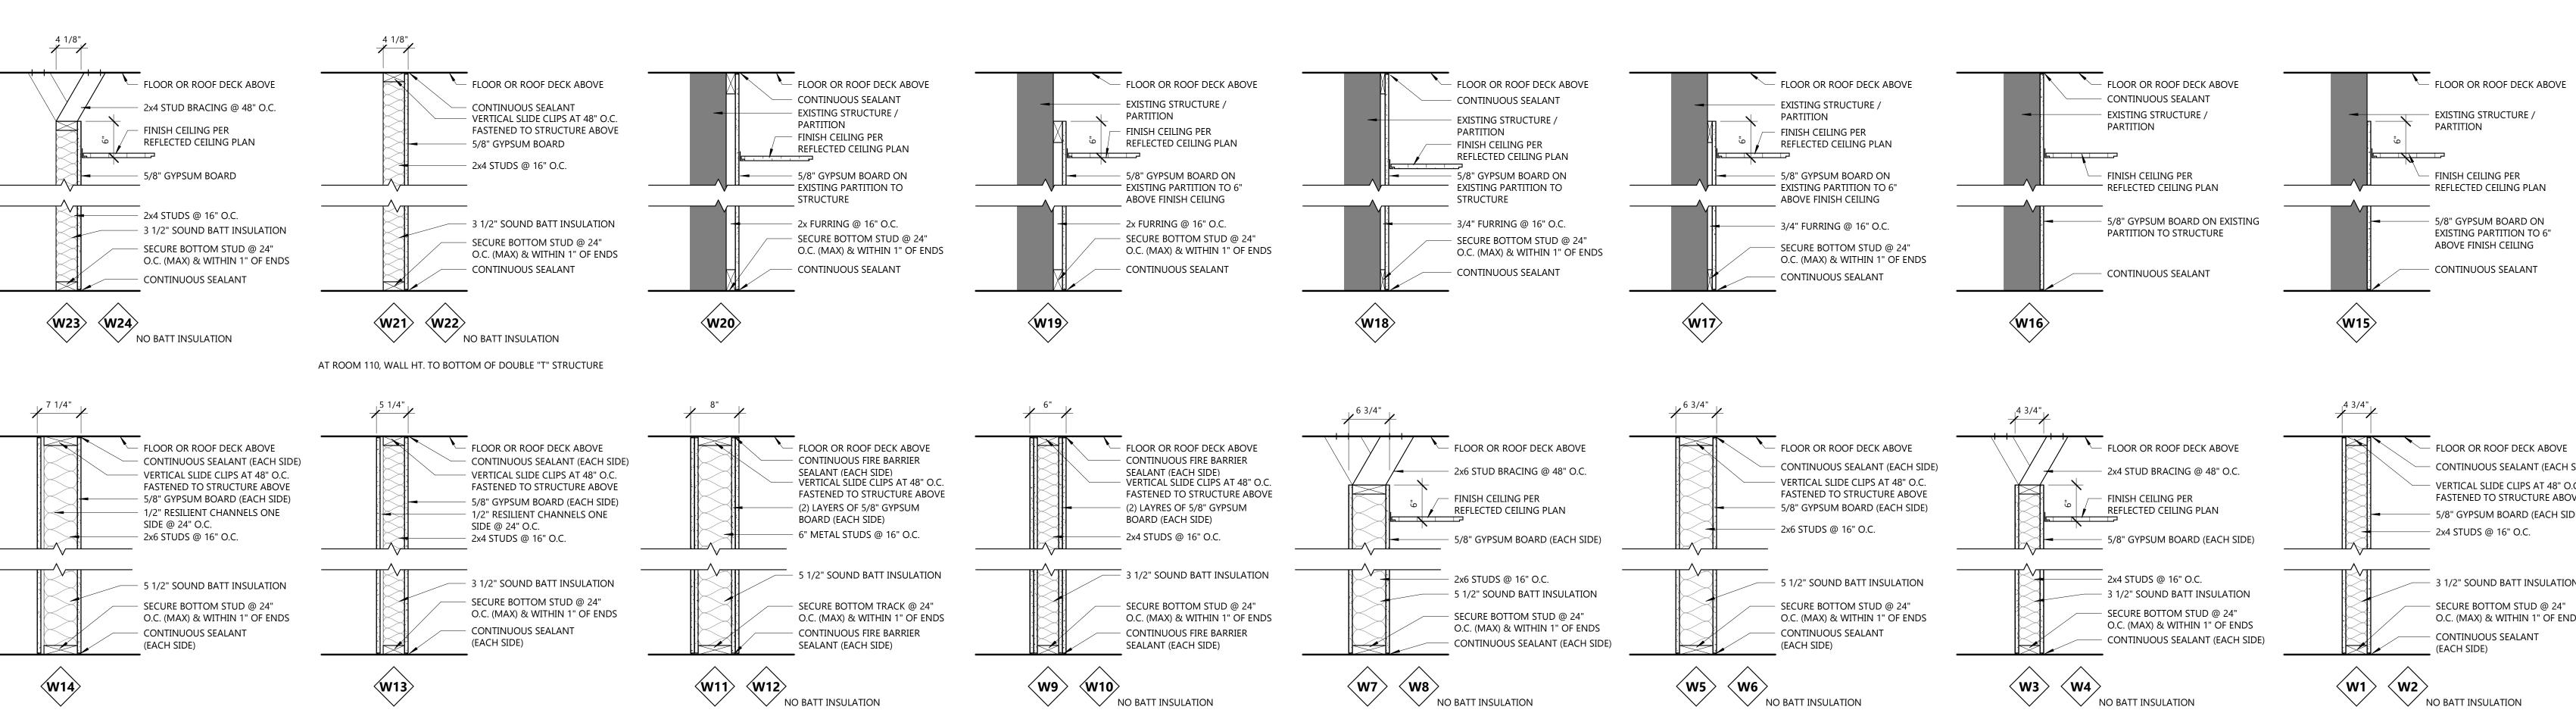

2HR FIRE

PARTITION/BARRIER (UL

U301) WHERE NOTED ON PLANS.

1HR FIRE PARTITION/BARRIER (UL U305) WHERE NOTED ON PLANS.

WALL TYPES 1" = 1'-0"

CLASSROOM PARTITION

STC RATING - 52

A001

PROJECT INFO

Date


08.22.23


Project No.

SHEET TITLE

WALL TYPES

22.009

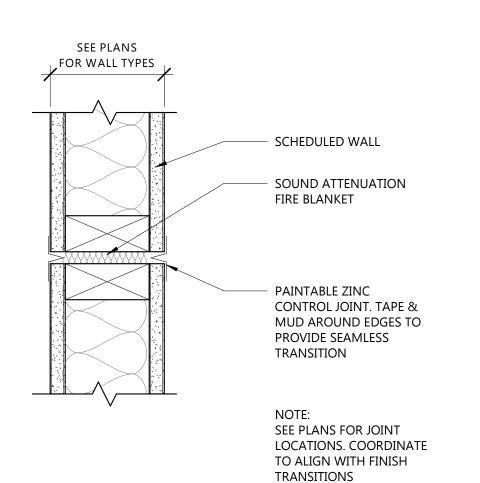

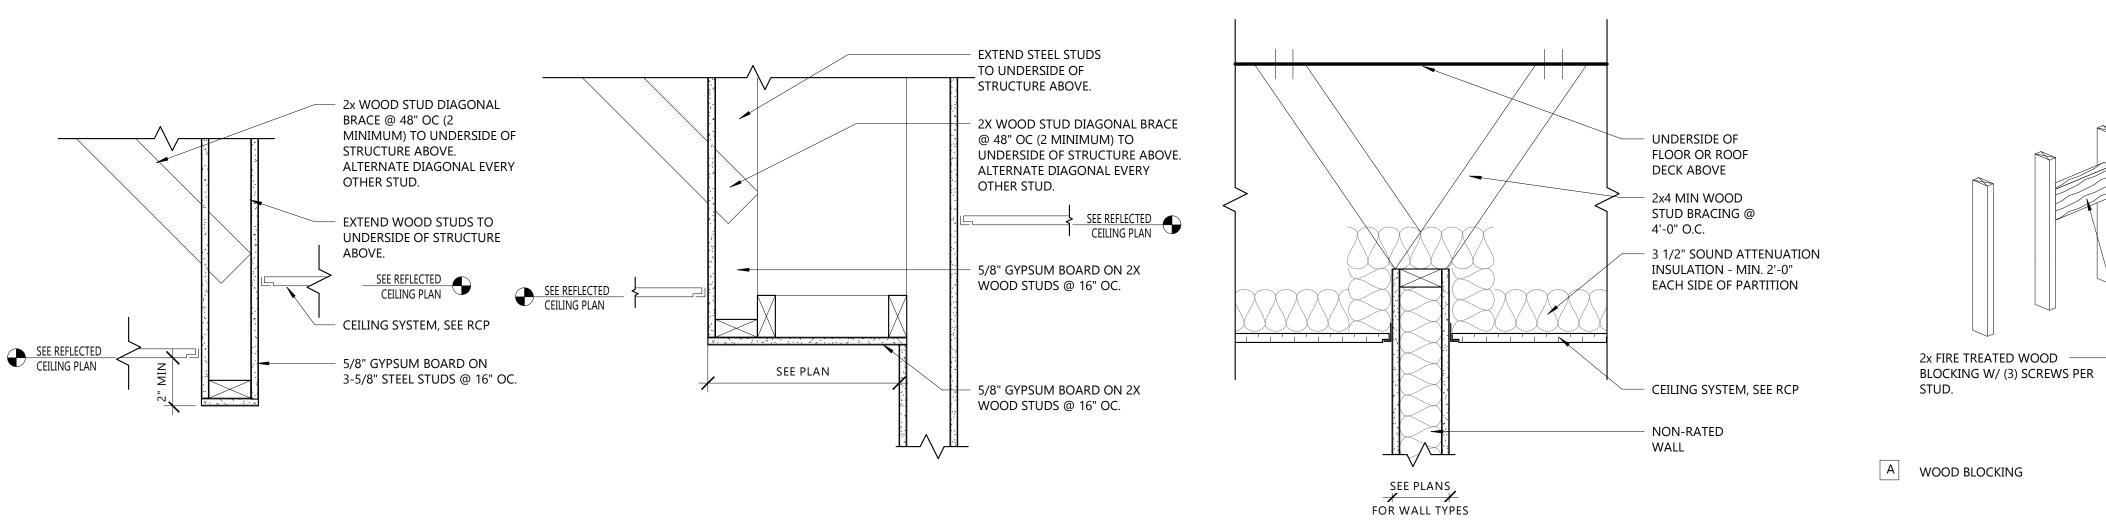
















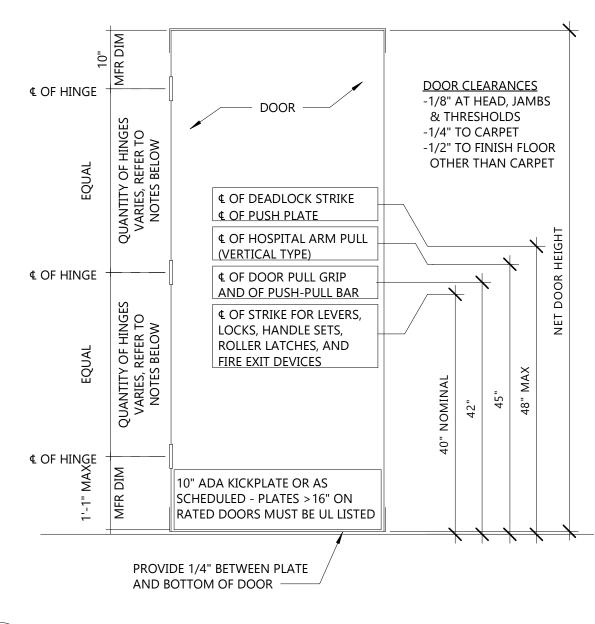

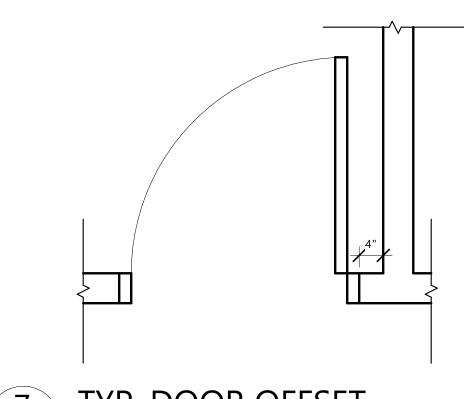

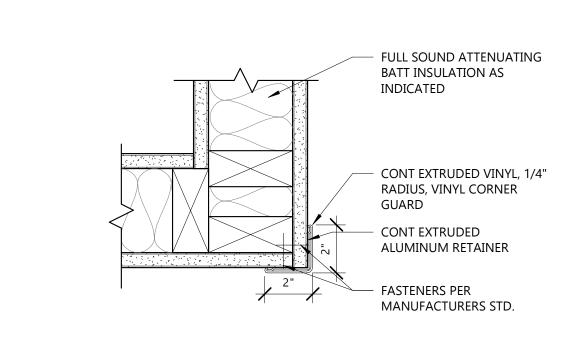

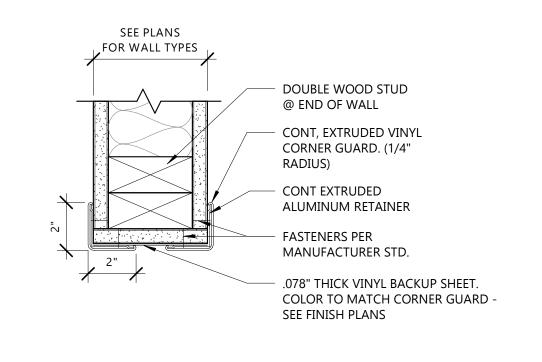

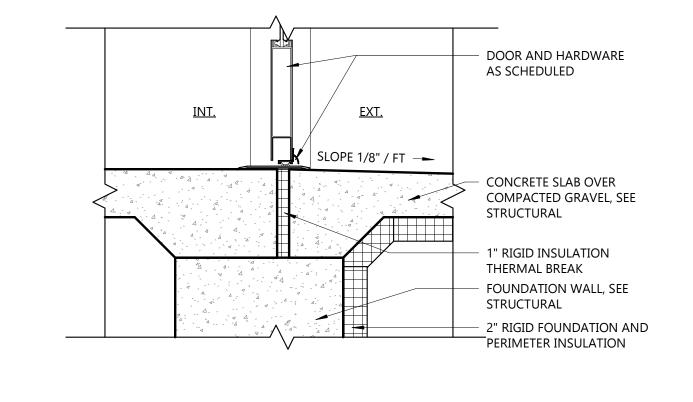

TYP. HARDWARE LOCATIONS

7 TYP. DOOR OFFSET 3/4" = 1'-0"

8 CORNER GUARD



10 THRESHOLD DETAIL A002 1 1/2" = 1'-0"



CEDARBURG, WISCONSIN 53012 PH. (262) 377-8001 FX. (262) 377-8003

ST. PAUL **LUTHERAN** PHASE 1 -**RENOVATION**

525 SUPERIOR TOMAH, WI 54660

NO. REV. DATE DESCRIPTION

PROJECT INFO

08.22.23

Project No. 22.009

SHEET TITLE

GENERAL ARCH DETAILS



DEMOLITION PLAN GENERAL NOTES:

- A. CONTRACTOR TO REVIEW SCOPE OF NEW CONSTRUCTION IN CONJUNCTION WITH DEMOLITION PLANS TO COORDINATE SCOPE OF WORK. CONTRACTOR TO CONTACT OWNER & ARCHITECT WITH ANY QUESTIONS OR CONCERNS PRIOR TO MATERIAL REMOVAL
- CONTRACTOR SHALL PRESERVE AND PROTECT ALL EXISTING BUILDING AMENITIES NOT SLATED FOR DEMOLITION OR REMODELING.
- VERIFY ALL DIMENSIONS AND CONDITIONS IN FIELD PRIOR TO START OF WORK. PORTIONS OF EXISTING CONSTRUCTION MAY HAVE BEEN REMOVED OR ALTERED. ALL DISCREPANCIES BETWEEN EXISTING CONDITIONS AND CONTRACT DOCUMENTS SHOULD BE BROUGHT TO THE ARCHITECT'S ATTENTION IMMEDIATELY.
- REFER TO MECHANICAL, ELECTRICAL, AND PLUMBING PLANS FOR ADDITIONAL DEMOLITION ITEMS AND NOTES. COORDINATE WORK WITH MEP REQUIREMENTS
- MAINTAIN CONTINUOUS UTILITY SERVICE TO ALL SPACES IN THE BUILDING NOT AFFECTED BY THIS WORK. COORDINATE W/ OWNER MINIMUM 72 HOURS IN ADVANCE FOR ANY DISRUPTION IN SERVICES REQUIRED TO PERFORM THE WORK OR TO MODIFY EXISTING PIPING, DUCTWORK, OR ASSOCIATED EQUIPMENT
- SCOPE OF DEMOLITION SHOWN CONSTITUTES MINIMUM AMOUNT NEEDED TO MEET DESIGN INTENT. ADDITIONAL DEMOLITION, REMOVAL, PATCHING, REPAIRS, OR REPLACEMENT OF ITEMS MAY BE REQUIRED TO ACCOMMODATE CONTRACTOR PHASING, SEQUENCING, OR MEANS & METHODS. THE ARCHITECT SHALL BE NOTIFIED OF ADDITIONAL SCOPE REQUIRED TO COMPLETE THE WORK PRIOR TO REMOVAL. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REPLACING ANY REMOVED ITEMS SHOWN IN THE DOCUMENTS AS EXISTING TO REMAIN.
- REMOVE ALL EXISTING INCIDENTAL CONDITIONS AS REQUIRED TO ACCOMMODATE PROPOSED CONSTRUCTION WHETHER SHOWN ON PLANS OR NOT. INCLUDING BUT NOT LIMITED TO FASTENERS, CLIPS, MOULDINGS, OUTLETS, CONDUIT, WIRING, PIPING, FIXTURES, FITTINGS, AND OTHER SYSTEMS. REROUTE CIRCUITS, PLUMBING, AND DUCTWORK AS REQUIRED TO MAINTAIN SERVICEABILITY OF SYSTEMS TO REMAIN.
- ALL HAZARDOUS MATERIALS TO BE DISPOSED OF PER APPLICABLE STATE, LOCAL, OR FEDERAL CODES & REGULATIONS
- PATCH ANY OPENINGS OR GAPS IN EXISTING FLOORS, WALLS, ROOF, OR FIRE RESISTIVE ASSEMBLIES CAUSED BY THE WORK TO MAINTAIN THE INTEGRITY OF FIRE RATINGS, WEATHER RESISTANCE, VAPOR BARRIERS, ETC. ANY DEFICIENCIES FOUND IN THE EXISTING CONSTRUCTION SHOULD BE BROUGHT TO THE ARCHITECT AND OWNER'S ATTENTION IMMEDIATELY.
- CONTRACTOR TO VERIFY EXISTING WALL CONSTRUCTION. CONTRACTOR TO PATCH AND REPAIR EXISTING WALLS TO REMAIN WITH LIKE CONSTRUCTION UNLESS NOTED OTHERWISE AND PROVIDE A SUITABLE SURFACE TO RECEIVE NEW FINISHES.
- REMOVE EXISTING FLOOR FINISHES SLATED FOR DEMOLITION TO SUB FLOOR AND
- SALVAGE EXISTING DOORS AND HARDWARE FOR REUSE, REMOVE OR RETURN EXCESS
- DOORS AND HARDWARE TO OWNER. SALVAGE EXISTING CASEWORK FOR REUSE, REMOVE OR RETURN EXCESS CASEWORK TO
- OWNER AT OWNER DISCRETION. SALVAGE EXISTING PLUMBING FIXTURES FOR REUSE, REMOVE OR RETURN EXCESS
- FIXTURES TO OWNER AT OWNER DISCRETION. SEE PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION SALVAGE EXISTING LIFE SAFETY EQUIPMENT, FIRE EXTINGUISHERS, EXIT SIGNS, FIRE

PREPARE FOR NEW FINISHES. SEE ROOM FINISH SCHEDULE

- OWNER DISCRETION. SEE ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION SALVAGE EXISTING HVAC GRILLES AND LOUVERS FOR REUSE. REMOVE OR RETURN EXCESS TO OWNER AT OWNER DISCRETION. SEE MECHANICAL DRAWINGS FOR
- SALVAGE EXISTING OUTLETS AND SWITCHES AND LIGHT FIXTURES FOR REUSE, PULL ALL ABANDONED WIRE FROM CONDUIT, RETURN EXCESS MATERIAL TO OWNER. SEE ELECTRICAL DRAWINGS FOR ADDITIONAL INFORMATION

ALARMS, ETC. FOR REUSE, REMOVE OR RETURN EXCESS EQUIPMENT TO OWNER AT

- SALVAGE EXISTING APPLIANCES, TOILET ACCESSORIES, SIGNAGE, AND EQUIPMENT FOR REUSE. REMOVE OR RETURN TO OWNER AT OWNER DISCRETION
- LIFE SAFETY FEATURES ARE TO REMAIN IN OPERATION THROUGH ALL PHASES OF CONSTRUCTION INCLUDING SMOKE DETECTION AND OTHER SYSTEMS TO MEET ALL APPLICABLE CODES & REGULATIONS. VERIFY WITH OWNER AND LIFE SAFETY PLAN(S) FOR

ST. PAUL LUTHERAN PHASE 1 -**RENOVATION**

N58 W6181 COLUMBIA RD.

CEDARBURG, WISCONSIN 53012

P.O. BOX 332

PH. (262) 377-8001

FX. (262) 377-8003

DEMOLITION PLAN - SYMBOL KEY

ADDITIONAL INFORMATION

EXISTING WALL TO REMAIN REMOVED DOOR = = REMOVED WALL NEW WALL

REMOVE FINISH MATERIAL FROM EXISTING WALL

TAG #

525 SUPERIOR TOMAH, WI 54660

NO. REV. DATE DESCRIPTION

KEYED DEMOLITION PLAN NOTES

DESCRIPTION

- REMOVE EXISTING DOOR(S) AND FRAME. PREP EXISTING SURFACES FOR NEW DOOR REMOVE EXISTING DOOR AND FRAME. SALVAGE DOOR FOR REINSTALLATION. PREP EXISTING SURFACES FOR NEW FRAME.
- REMOVE PORTION OF EXISTING WALL AND ASSOCIATED COMPONENTS. REMOVE EXISTING WOOD PANELING AND ANY SUBSTRATE TO EXPOSE STUD WALL. PREP WALL TO RECEIVE NEW GYPSUM BOARD.
- REMOVE EXISTING LIGHT FIXTURE AND ASSOCIATED COMPONENTS. PREPARE EXISTING SURFACE TO RECEIVE NEW FIXTURE. REMOVE PORTION OF EXISTING CEILING AND ASSOCIATED COMPONENTS. REMOVE EXISTING PLATFORM AND ASSOCIATED COMPONENTS. SALVAGE CARPET TILE AND DELIVER TO OWNER FOR REUSE.
- REMOVE EXISTING STAIR AND RAILINGS. THIS IS A LOAD BEARING WALL. SEE STRUCTURAL FOR DEMOLITION REQUIREMENTS. EXISTING COLUMN TO REMAIN.
- REMOVE EXISTING FLOORING AND BASE. SALVAGE CARPET TILE AND DELIVER TO OWNER FOR REUSE. EXISTING ELECTRICAL AND MECHANICAL EQUIPMENT TO REMAIN. REMOVE EXISTING MECHANICAL EQUIPMENT AND ALL ASSOCIATED COMPONENTS.
- EXISTING MECHANICAL EQUIPMENT TO REMAIN. REMOVE EXISTING CHAIR RAIL ON WALL.
- EXISTING DOOR TO REMAIN.
- SAVE EXISTING FIRE EXTINGUISHER TO BE REINSTALLED IN NEW CABINET. EXISTING AED AND ALL ASSOCIATED COMPONENTS TO BE SALVAGED FOR REINSTALLATION.

PROJECT INFO

08.22.23

Project No. 22.009

SHEET TITLE

DEMOLITION PLANS

AD101

EXISTING

TO REMAIN [™]

1/8" = 1'-0"

MOTHER'S


ROOM

CUSTODIAL


LOWER LEVEL - DEMOLITION PLAN

MEN'S

WOMEN'S

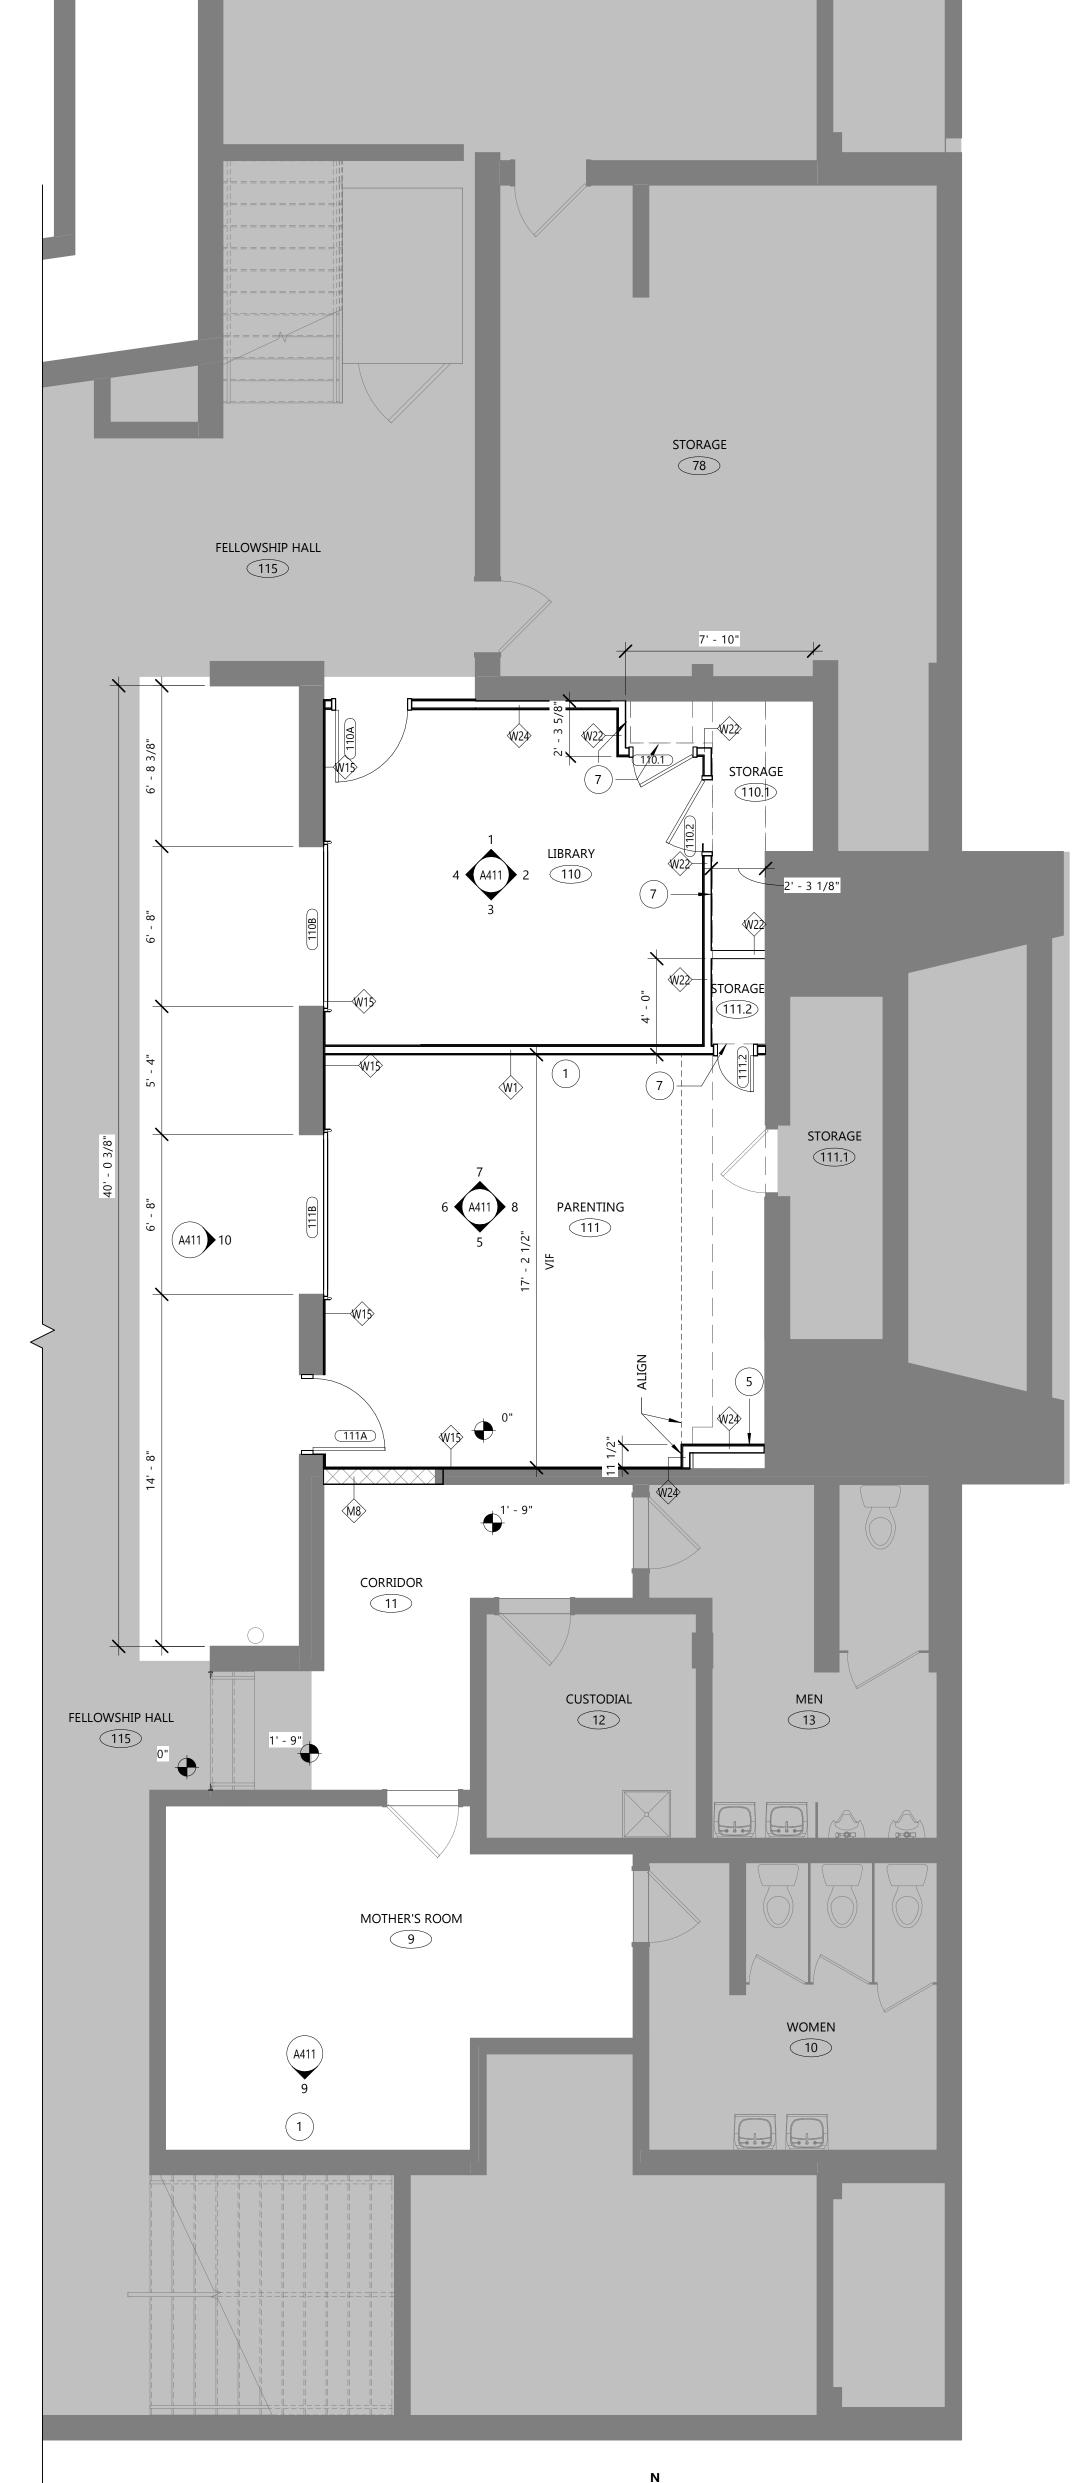

		EQUIPME	NT S	CHE	DULE
NO.	TYPE	OFOI	OFCI	CFCI	COMMENTS
MIC1	MICROWAVE		Х		
REF1	REFRIGERATOR		Х		
TV1	TV MONITOR		X		

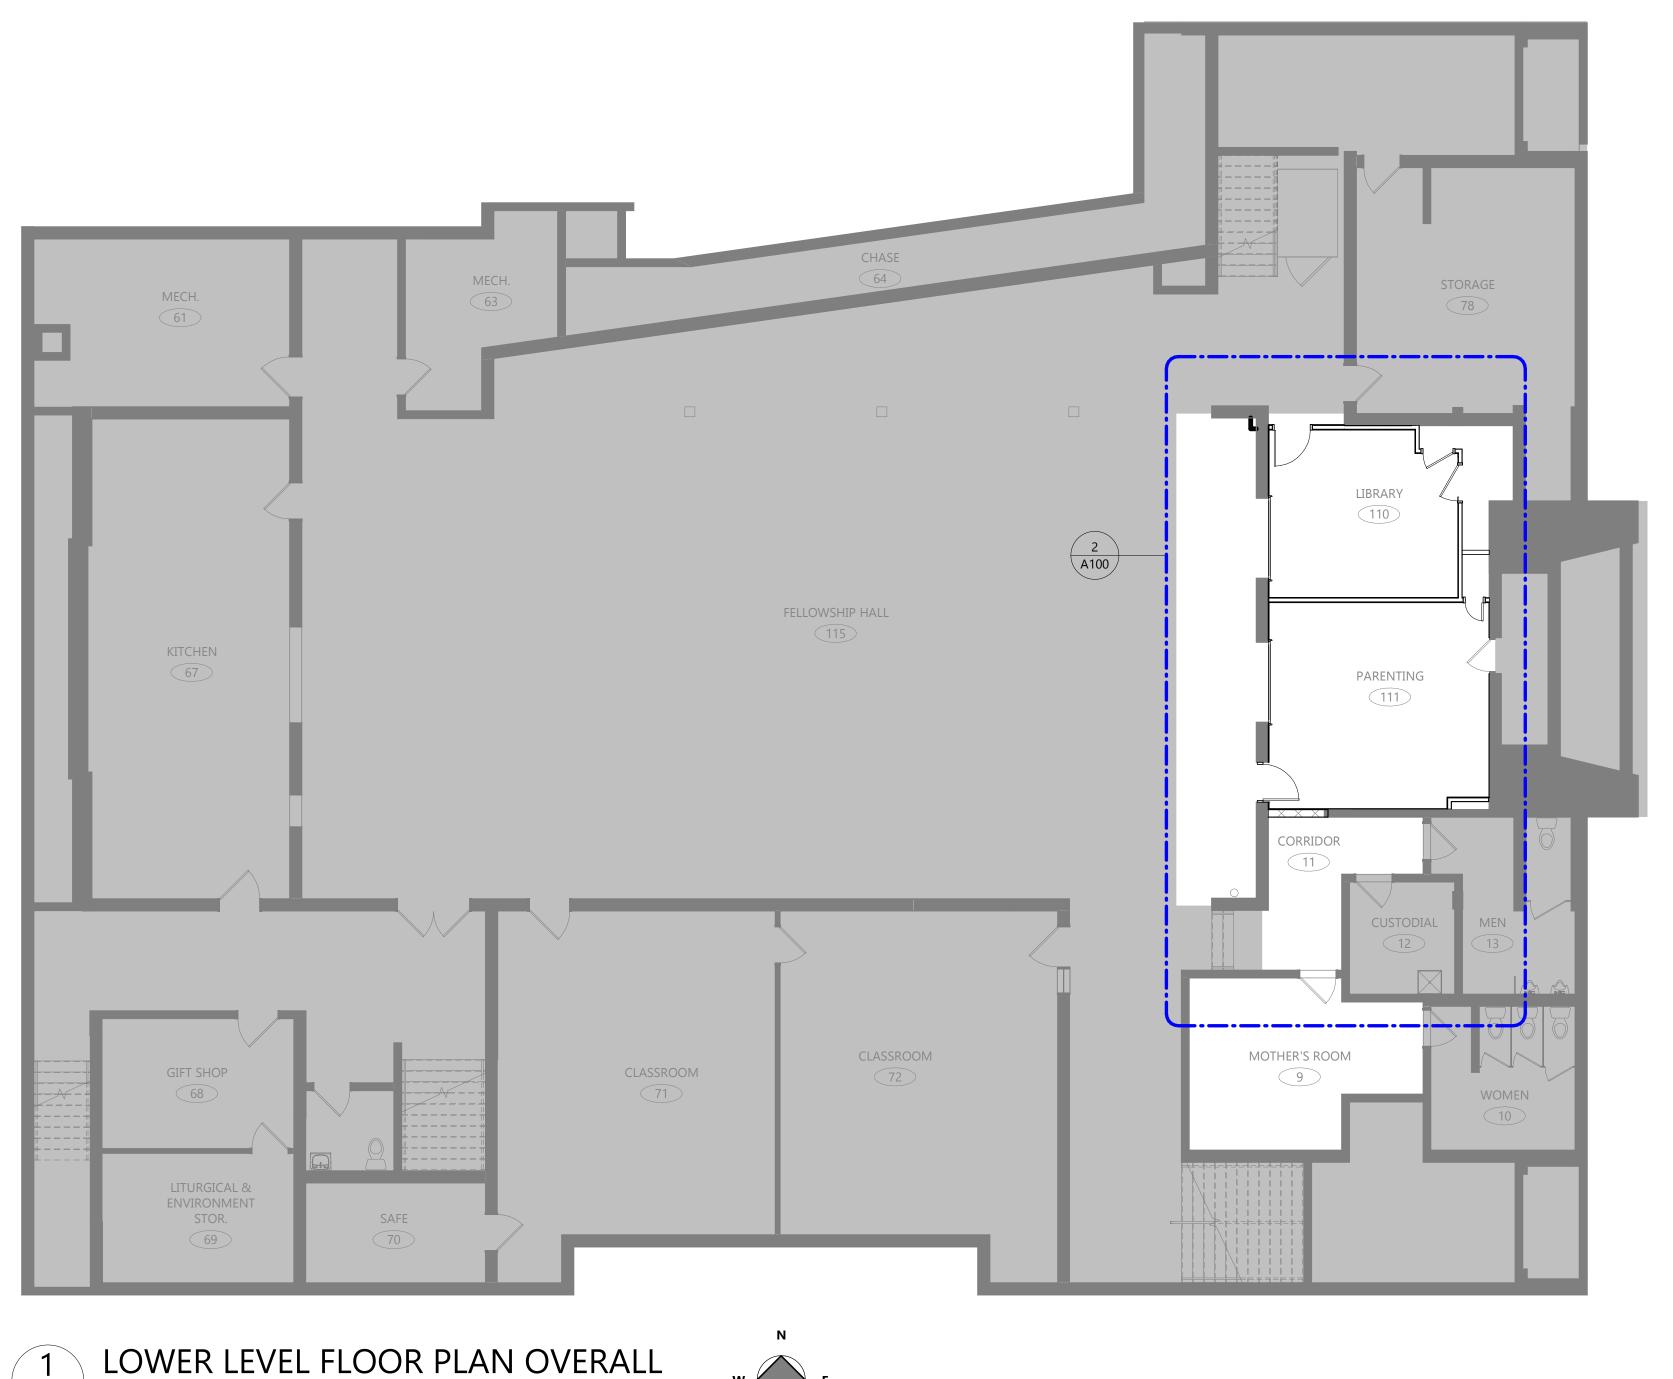

A100

1/8" = 1'-0"

FLOOR PLAN GENERAL NOTES:

- A. SEE WALL SCHEDULE FOR WALL ASSEMBLY INFORMATION. NOTE: SEE SECTIONS AND ELEVATIONS FOR CHANGES IN MATERIALS/WALL TYPES/ACCENT-ELEMENTS THAT MAY NOT BE INDICATED AT PLAN CUT.
- B. SEE 7 / A002 FOR TYPICAL DIMENSIONS OF DOOR OPENING FROM ADJACENT WALL.
- PROVIDE BLOCKING AT ALL MILLWORK AND WALL HUNG ELEMENTS IN WALLS. CONTRACTOR TO COORDINATE W/ OWNER REPRESENTATIVE FOR FINAL LOCATIONS OF OWNER-FURNISHED EQUIPMENT. SEE DETAIL 5 / A002 . ALL WOOD BLOCKING TO BE FIRE-RETARDANT TREATED WOOD IN BUILDINGS OF NONCOMBUSTIBLE CONSTRUCTION (IBC TYPE I & II) AND IN RATED WALLS IN BUILDINGS OF COMBUSTIBLE CONSTRUCTION
- PROVIDE CORNER GUARDS AS SHOWN GRAPHICALLY. SEE FINISH PLAN FOR COLORS & TYPES. ALL OUTSIDE CORNERS NOT SHOWN RECEIVING CORNER GUARDS ARE TO BE VERIFIED WITH ARCHITECT DURING BIDDING
- E. ALL INTERIOR PLAN DIMENSIONS ARE TO FACE OF INTERIOR FINISH OF WALL, U.N.O.
- G. ALL VERTICAL DIMENSIONS TO BE ABOVE FINISH FLOOR (A.F.F.) U.N.O.
- H. ALL DOORS USED IN CONJUNCTION WITH EXITS SHALL BE ARRANGED TO READILY OPEN WITHOUT THE USE OF A KEY OR SPECIAL KNOWLEDGE FROM THE SIDE OF EGRESS.
- I. NOT USED.

(IBC TYPE III, IV, & V).

- J. ALL PARTITION PENETRATIONS SHALL BE FIELD VERIFIED, BRACED, AND SEALED TO MEET REQUIRED RATINGS. UTILIZE UL-APPROVED METHODS
- K. PROVIDE PROPER PREPARATION TO ALL SURFACES TO RECEIVE NEW FINISHES
- L. ALL ROOMS TO RECEIVE ROOM AND NUMBER SIGNAGE ADJACENT TO DOOR, COORDINATE BLOCKING REQUIREMENTS WITH SIGN VENDOR.
- M. WHERE FLOOR DRAINS ARE REQUIRED (SEE PLUMBING) PITCH CONCRETE SLAB TO DRAINS 1/8" PER FOOT, TYP, UNLESS NOTED OTHERWISE.
- N. ALL GYPSUM BOARD INTERIOR SURFACES TO RECEIVE A LEVEL 4 FINISH AND PRIME COAT FOR FUTURE PAINTING APPLICATION
- O. ALL PARTITIONS TO BE TYPE W1 AND EXTEND TO THE UNDERSIDE OF FLOOR/ROOF DECK
- ABOVE UNLESS NOTED OTHERWISE

FLOOR PLAN - SYMBOL KEY

===== NEW WALL

EXISTING WALL TO REMAIN EXISTING DOOR TO REMAIN

= = = REMOVED WALL

WALL TYPE TAG. SEE WALL TYPES SHEET FOR ADDITIONAL INFORMATION

MILLWORK. SEE INTERIOR ELEVATIONS AND DETAILS

FE-# FIRE EXTINGUISHERS

FE-1 - RECESSED CABINET FE-2 - SEMI-RECESSED CABINET FE-3 - SURFACE MOUNTED CABINET FE-4 - SURFACE MOUNTED EXTINGUISHER ONLY

PP PUSH PAD DOOR ACTUATOR

TS TOUCHLESS SENSOR DOOR ACTUATOR

CR CARD READER

CJ CONTROL JOINT

DESCRIPTION

1 PROVIDE WALL MOUNTED MONITOR AND SPEAKERS WITH STREAMING AUDIO/VIDEO FROM SANCTUARY BROADCAST. PROVIDE BLOCKING AS REQUIRED. BY OTHERS.

EXISTING MECHANICAL EQUIPMENT TO REMAIN. EXISTING COLUMN TO REMAIN.

4 HAT SHELF & POLE - SEE DETAILS

NEW WALL TO WRAP EXISTING MECHANICAL DUCT. PROVIDE NEW GRILL IN NEW WALL CONNECTING TO EXISTING RETURN DUCT.

NEW F.E. CABINET WITH EXISTING F.E.

ALIGN BACK OF NEW WALL WITH FACE OF EXISTING DUCT - PROVIDE 1" CLEARANCE BETWEEN NEW WALL AND EXISTING DUCT.

KEYED FLOOR PLAN NOTES

8 EXISTING AED TO BE REINSTALLED IN ORIGINAL LOCATION.

Design

N58 W6181 COLUMBIA RD. P.O. BOX 332 CEDARBURG, WISCONSIN 53012 PH. (262) 377-8001 FX. (262) 377-8003

ST. PAUL LUTHERAN PHASE 1 -**RENOVATION**

525 SUPERIOR AVE

TOMAH, WI 54660

NO. REV. DATE DESCRIPTION

PROJECT INFO

Project No. 22.009

08.22.23


SHEET TITLE

FLOOR PLAN - LOWER LEVEL

A100

© Groth Design Group, Inc.

LOWER LEVEL FLOOR PLAN A100 1/4" = 1'-0"

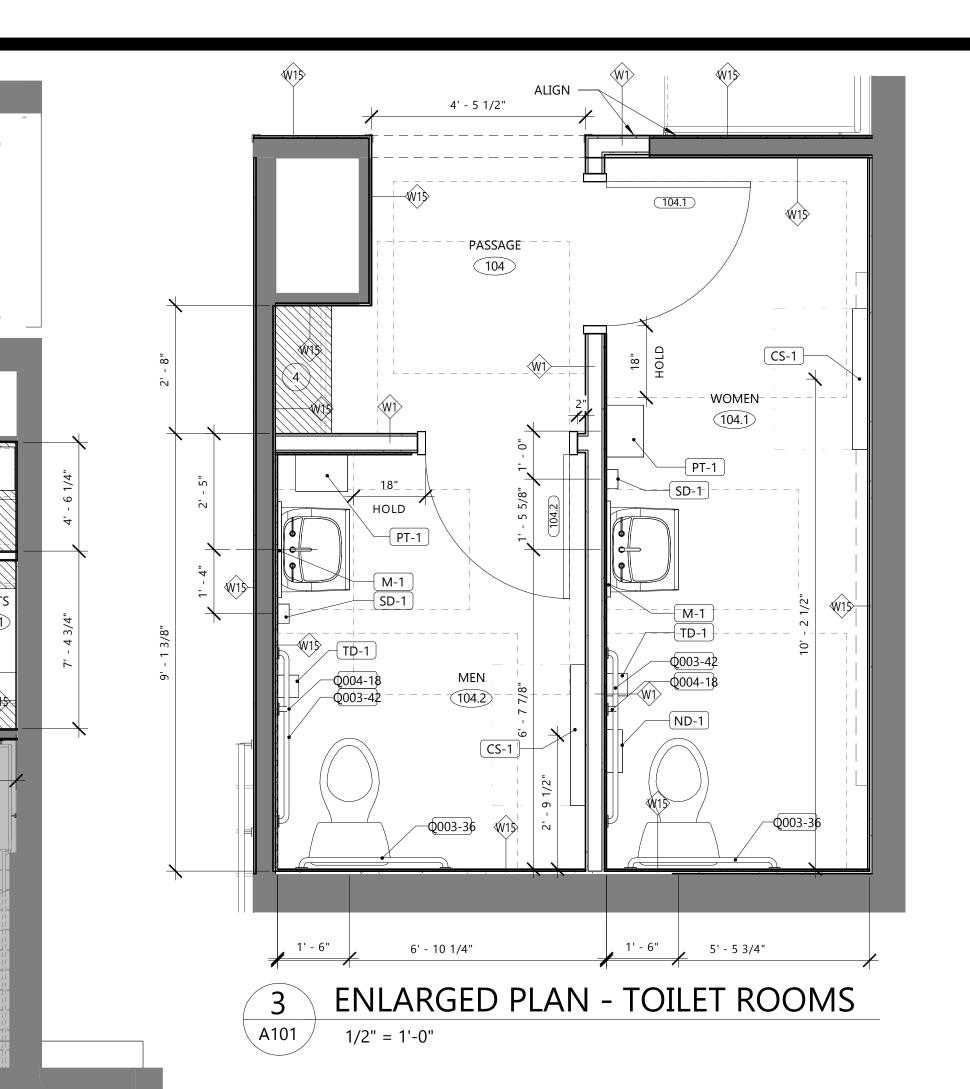

NO.	TYPE	OFOI	OFCI	CFCI	COMMENTS
CS-1	BABY CHANGING STATION			Х	
M-1	MIRROR, 24" x 36"			Х	
ND-1	NAPKIN DISPOSAL			Х	
PT-1	PAPER TOWEL DISPENSER, ROLL TOWEL			Х	
Q003-36	GRAB BAR, 36" HORIZONTAL			Х	
Q003-42	GRAB BAR, 42" HORIZONTAL			Х	
Q004-18	GRAB BAR, 18" VERTICAL			Х	
SD-1	SOAP DISPENSER, MANUAL			Х	
TD-1	TOILET TISSUE DISPENSER, ROLL			Х	
	EQU	IPMEI	NT S	СНЕГ	DULE
NO.	TYPE	OFOI	OFCI	CFCI	COMMENTS

WORSHIP

(101)

ENTRY 103

MICROWAVE REFRIGERATOR

TV MONITOR

FLOOR PLAN GENERAL NOTES: A. SEE WALL SCHEDULE FOR WALL ASSEMBLY INFORMATION. NOTE: SEE SECTIONS AND ELEVATIONS FOR CHANGES IN MATERIALS/WALL TYPES/ACCENT-ELEMENTS THAT MAY NOT BE INDICATED AT PLAN CUT. B. SEE 7 / A002 FOR TYPICAL DIMENSIONS OF DOOR OPENING FROM ADJACENT WALL. PROVIDE BLOCKING AT ALL MILLWORK AND WALL HUNG ELEMENTS IN WALLS.

CONTRACTOR TO COORDINATE W/ OWNER REPRESENTATIVE FOR FINAL LOCATIONS OF OWNER-FURNISHED EQUIPMENT. SEE DETAIL 5 / A002 . ALL WOOD BLOCKING TO BE

FIRE-RETARDANT TREATED WOOD IN BUILDINGS OF NONCOMBUSTIBLE CONSTRUCTION

(IBC TYPE I & II) AND IN RATED WALLS IN BUILDINGS OF COMBUSTIBLE CONSTRUCTION

(IBC TYPE III, IV, & V). PROVIDE CORNER GUARDS AS SHOWN GRAPHICALLY. SEE FINISH PLAN FOR COLORS & TYPES. ALL OUTSIDE CORNERS NOT SHOWN RECEIVING CORNER GUARDS ARE TO BE

VERIFIED WITH ARCHITECT DURING BIDDING

ALL INTERIOR PLAN DIMENSIONS ARE TO FACE OF INTERIOR FINISH OF WALL, U.N.O. - / ---

G. ALL VERTICAL DIMENSIONS TO BE ABOVE FINISH FLOOR (A.F.F.) U.N.O.

H. ALL DOORS USED IN CONJUNCTION WITH EXITS SHALL BE ARRANGED TO READILY OPEN WITHOUT THE USE OF A KEY OR SPECIAL KNOWLEDGE FROM THE SIDE OF EGRESS.

I. NOT USED.

ALL PARTITION PENETRATIONS SHALL BE FIELD VERIFIED, BRACED, AND SEALED TO MEET REQUIRED RATINGS. UTILIZE UL-APPROVED METHODS

K. PROVIDE PROPER PREPARATION TO ALL SURFACES TO RECEIVE NEW FINISHES

ALL ROOMS TO RECEIVE ROOM AND NUMBER SIGNAGE ADJACENT TO DOOR, COORDINATE BLOCKING REQUIREMENTS WITH SIGN VENDOR.

DRAINS 1/8" PER FOOT, TYP, UNLESS NOTED OTHERWISE.

M. WHERE FLOOR DRAINS ARE REQUIRED (SEE PLUMBING) PITCH CONCRETE SLAB TO

N. ALL GYPSUM BOARD INTERIOR SURFACES TO RECEIVE A LEVEL 4 FINISH AND PRIME COAT FOR FUTURE PAINTING APPLICATION

ALL PARTITIONS TO BE TYPE W1 AND EXTEND TO THE UNDERSIDE OF FLOOR/ROOF DECK ABOVE UNLESS NOTED OTHERWISE

Design

N58 W6181 COLUMBIA RD.

CEDARBURG, WISCONSIN 53012

P.O. BOX 332

PH. (262) 377-8001 FX. (262) 377-8003

FLOOR PLAN - SYMBOL KEY

EXISTING WALL TO REMAIN EXISTING DOOR TO REMAIN REMOVED DOOR = = = REMOVED WALL

WINDOW TAG

WALL TYPE TAG. SEE WALL TYPES SHEET FOR ADDITIONAL INFORMATION

MILLWORK. SEE INTERIOR ELEVATIONS AND DETAILS

FIRE EXTINGUISHERS

101.1 DOOR TAG

FE-1 - RECESSED CABINET FE-2 - SEMI-RECESSED CABINET

FE-3 - SURFACE MOUNTED CABINET FE-4 - SURFACE MOUNTED EXTINGUISHER ONLY

PP PUSH PAD DOOR ACTUATOR

TS TOUCHLESS SENSOR DOOR ACTUATOR **CR** CARD READER

CJ CONTROL JOINT

DESCRIPTION 1 PROVIDE WALL MOUNTED MONITOR AND SPEAKERS WITH STREAMING AUDIO/VIDEO FROM

KEYED FLOOR PLAN NOTES

SANCTUARY BROADCAST. PROVIDE BLOCKING AS REQUIRED. BY OTHERS. EXISTING MECHANICAL EQUIPMENT TO REMAIN.

EXISTING COLUMN TO REMAIN.

HAT SHELF & POLE - SEE DETAILS

NEW WALL TO WRAP EXISTING MECHANICAL DUCT. PROVIDE NEW GRILL IN NEW WALL CONNECTING TO EXISTING RETURN DUCT.

NEW F.E. CABINET WITH EXISTING F.E. ALIGN BACK OF NEW WALL WITH FACE OF EXISTING DUCT - PROVIDE 1" CLEARANCE BETWEEN

NEW WALL AND EXISTING DUCT.

8 EXISTING AED TO BE REINSTALLED IN ORIGINAL LOCATION.

ST. PAUL LUTHERAN PHASE 1 -**RENOVATION**

525 SUPERIOR AVE TOMAH, WI 54660

NO. REV. DATE DESCRIPTION

PROJECT INFO

08.22.23


Project No. 22.009

SHEET TITLE

FLOOR PLAN - MAIN LEVEL

A101

FIRST FLOOR PLAN - GATHERING 1/4" = 1'-0"

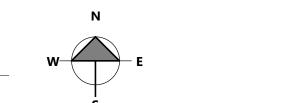

₩1≻-WOMEN -

(103A)

109B

CORRIDOR

GATHERING 101

101.2

ENTRY 103

ALIGN -

(101A)


WORSHIP


102





FR13 BASE BID

R14 ALTERNATE 1




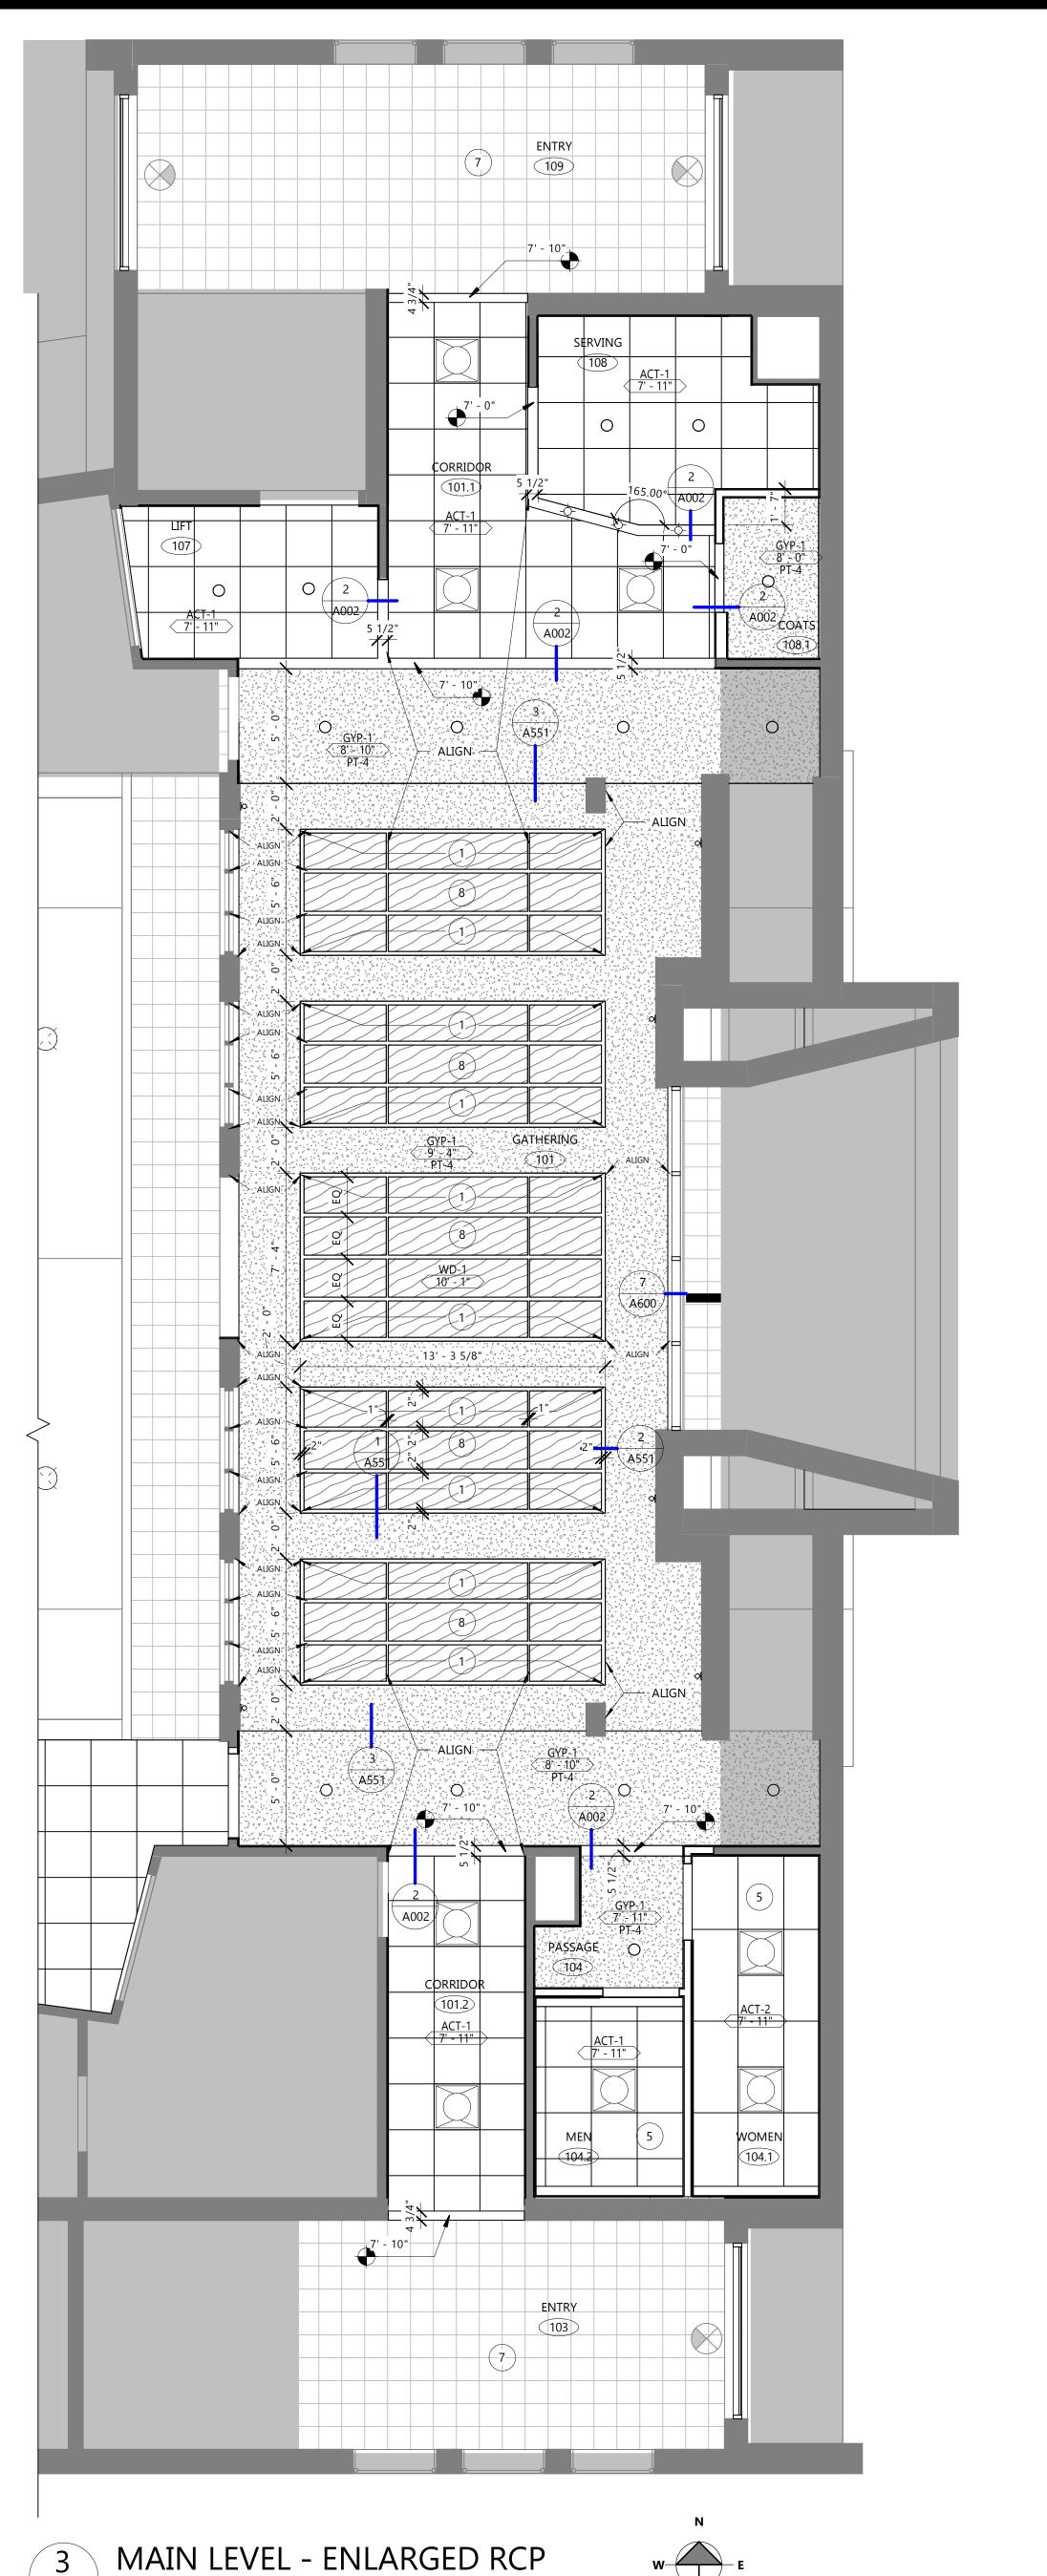

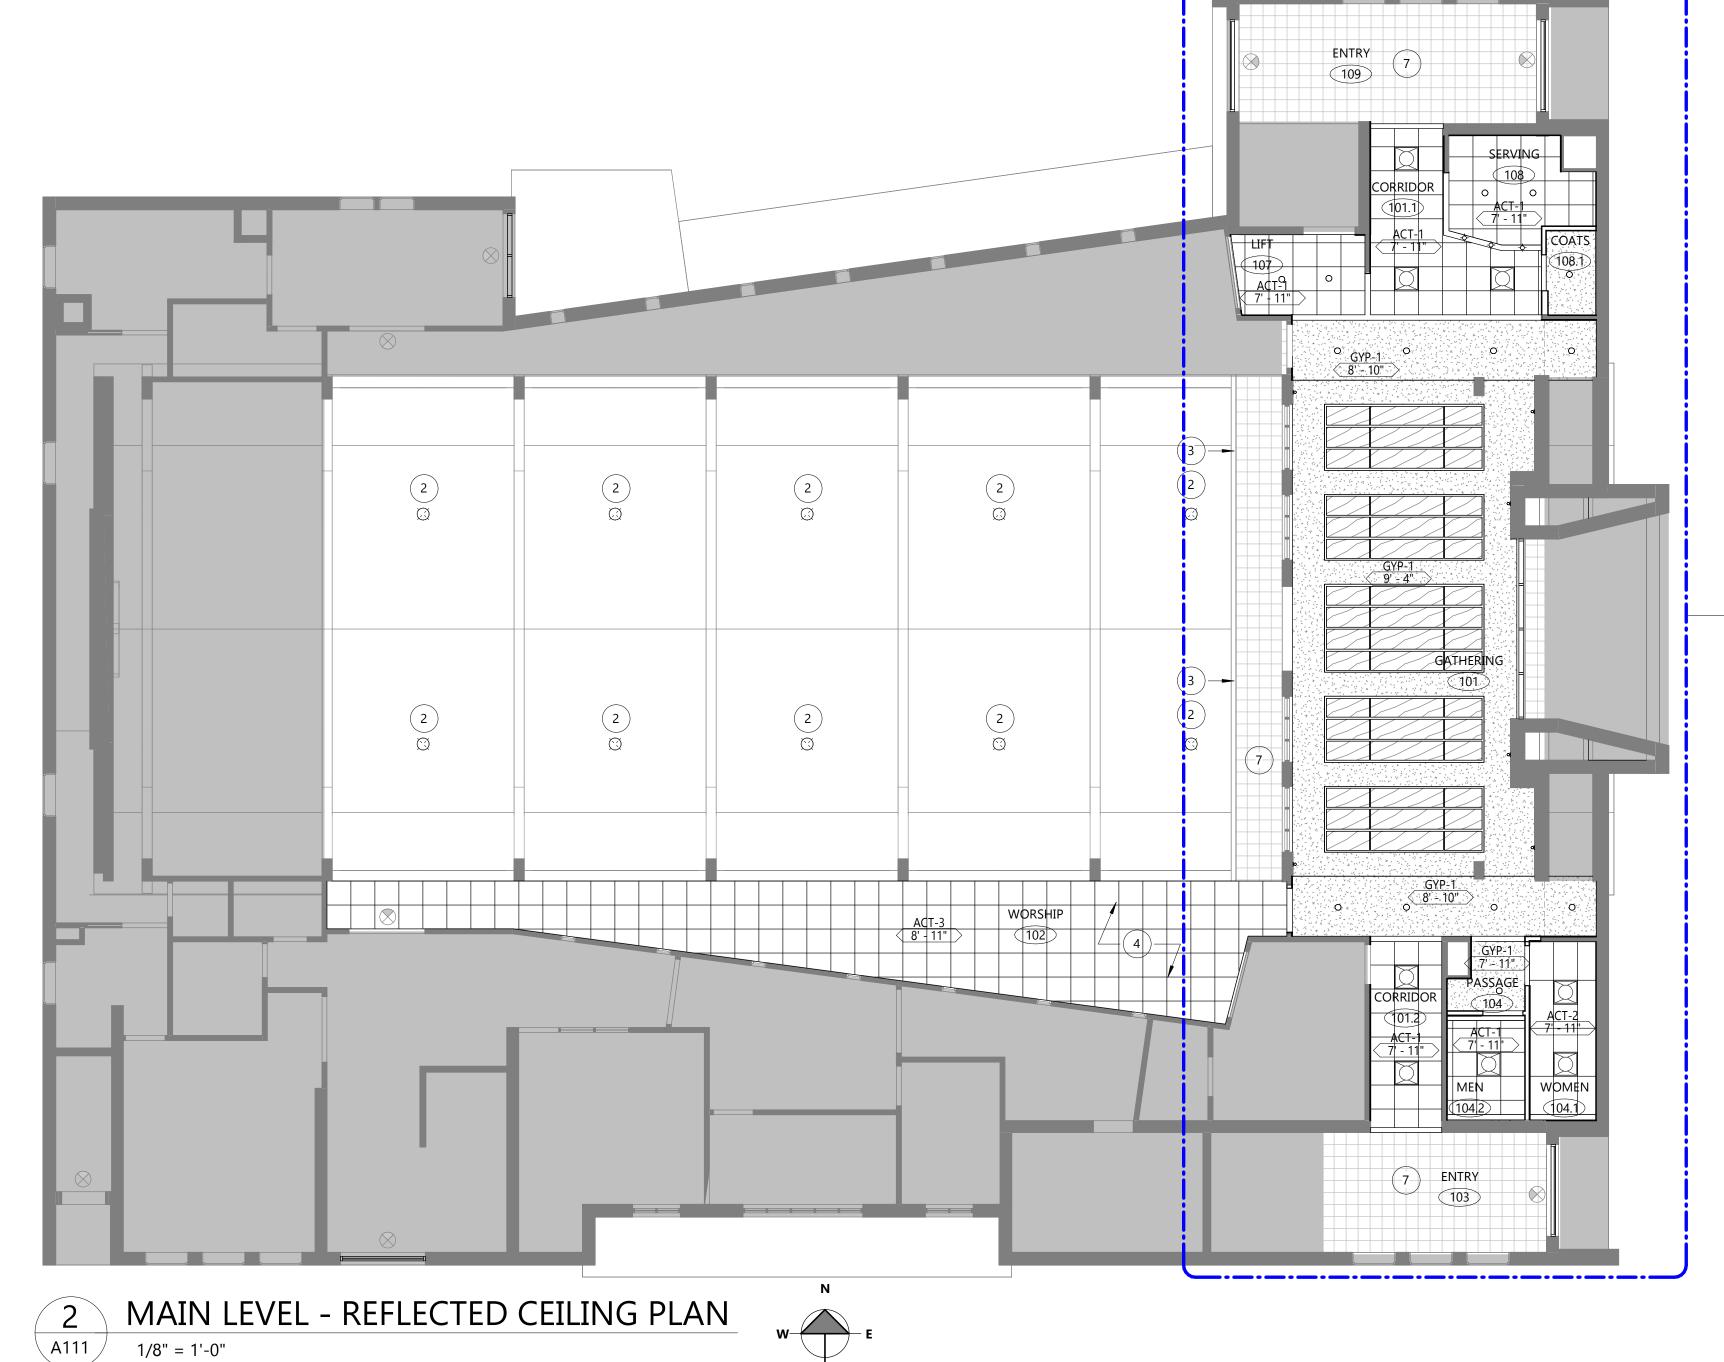

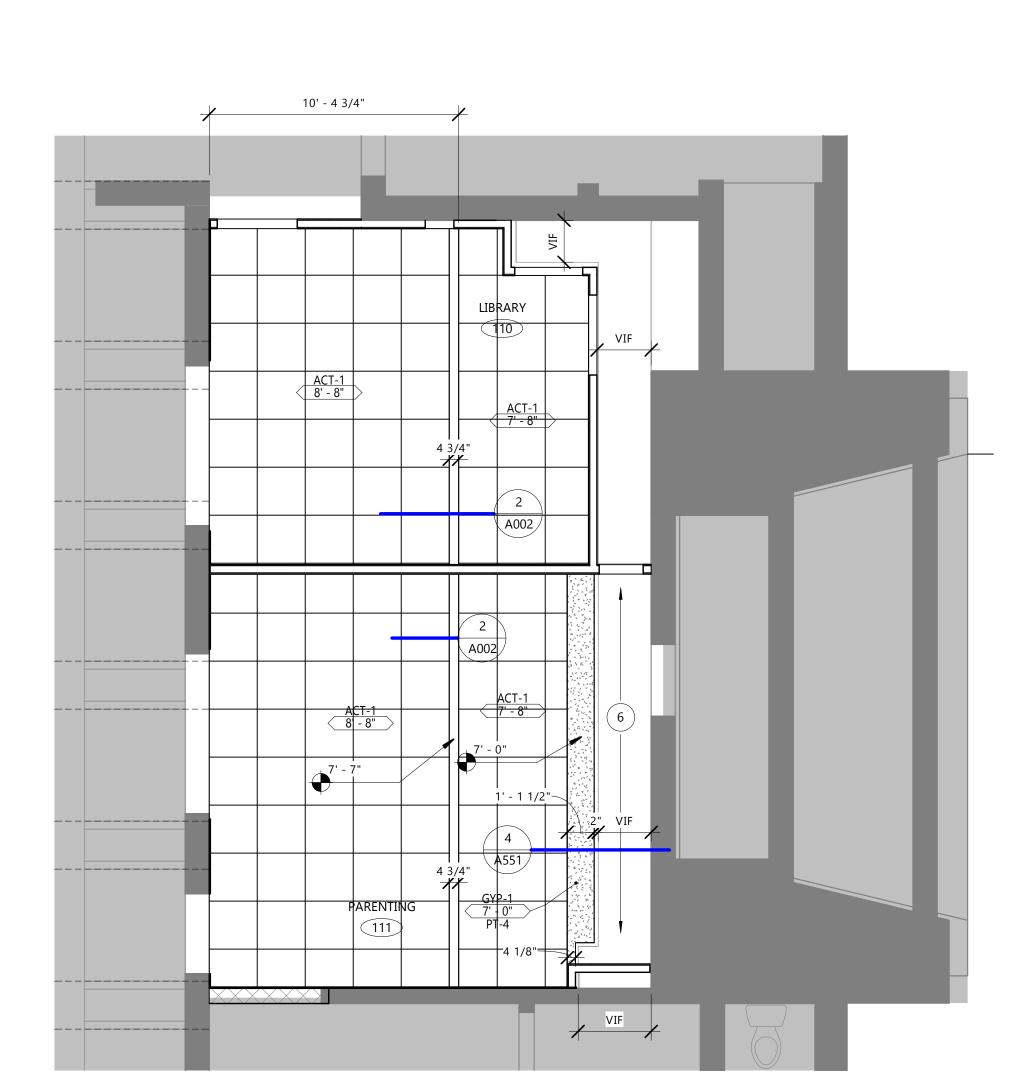


LOWER LEVEL - REFLECTED CEILING PLAN




REFLECTED CEILING PLAN GENERAL NOTES:

- THIS DRAWING INDICATES THE GENERAL LOCATION OF FIXTURES, ARCHITECTURAL DETAILS AND FINISHES. REFER TO ENGINEERING DRAWINGS FOR ADDITIONAL INFORMATION AND SPECIFICATIONS.
- SEE FINISH SCHEDULE, FINISH PLANS, AND SPECIFICATIONS FOR ADDITIONAL INFORMATION.
- PROVIDE ACT HOLD DOWN CLIPS WITHIN 20'-0" OF ENTRY DOORS
- D. ALL CEILING TILE TO BE CENTERED IN BOTH DIRECTIONS IN EACH ROOM OR SPACE
- SEE ELECTRICAL DRAWINGS FOR FIXTURE LOCATIONS. VERIFY MOUNTING HEIGHTS OF DECORATIVE FIXTURES WITH ARCHITECT PRIOR TO INSTALLATION.
- F. ALL DOWN LIGHTS AND WALL WASHERS TO BE CENTERED IN CEILING TILE OR SOFFIT,
- G. SEE MECHANICAL DRAWINGS FOR DUCT AND EQUIPMENT LAYOUT.
- COORDINATE LOCATION OF ELECTRICAL FIXTURES, MECHANICAL GRILLES AND DIFFUSERS, SPRINKLER HEADS, AND OTHER CEILING MOUNTED ITEMS, NOTIFY ARCHITECT OF CONFLICTS PRIOR TO FINAL INSTALLATION.
- WHERE NEW CONSTRUCTION REQUIRES REMOVAL OF GRID OR TILES, ENSURE GRID IS REPLACED TO MEET MANUFACTURERS REQUIREMENTS FOR HANGER WIRE, EDGE MOLDING, CROSS T'S AND MAIN BEAMS, ETC. REPLACE TILES AS NECESSARY.




ACOUSTIC CEILING TILE. SEE FINISH LEGEND FOR MORE INFORMATION

PAINTED GYP. BD. CEILING, BULKHEAD, HEADER, OR SOFFIT



_......

TYPE. SEE FINISH SCHEDULE
PT-X
HEIGHT - APPLIED FINISH. SEE FINISH SCHEDULE



TAG #

PROPOSED LIGHT FIXTURE LOCATIONS. COORDINATE W/ ELECTRICAL



KEYED REFLECTED CEILING PLAN NOTES

DESCRIPTION

- FLUSH MOUNTED LED FIXTURE ON VERTICAL FACE OF TRAY CEILING. FIXTURE TO BE CONTINUOUS ALONG ENTIRE FACE OF SURFACE INDICATED. FIXTURE TO BE LUMENWERX VIA 3 LED RECESSED HLO FLUSH OR APPROVED SIMILAR. - BY OTHERS.
- REPLACE EXISTING PENDANT FIXTURE WITH NEW BY OTHERS. REPLACE EXISTING PENDANT FIXTURE WITH NEW. ADDITIONAL PENDANT LOCATED ABOVE
- BALCONY IS SMALLER THAN SANCTUARY PENDANT BY OTHERS. CEILING GRID IN THIS AREA TO BE CAPABLE OF SUPPORTING HARD SURFACE PANELS.
- CENTER OR APPROVED EQUAL. PROVIDE NEW EXHAUST - BY OTHERS.
- EXISTING MECHANICAL TO BE PAINTED TO MATCH GYPSUM BOARD CEILING.
- EXISTING CEILING TO REMAIN. WD-1 CEILING COMPOSED OF VENEERED PLYWOOD PANELS. JOINTS AND PERIMETER TO BE COVERED WITH WD-1 TRIM.

ST. PAUL PHASE 1 -**RENOVATION**

Design

N58 W6181 COLUMBIA RD.

CEDARBURG, WISCONSIN 53012

P.O. BOX 332

PH. (262) 377-8001 FX. (262) 377-8003

525 SUPERIOR TOMAH, WI 54660

NO. REV. DATE DESCRIPTION

PROJECT INFO

SHEET TITLE

REFLECTED CEILING PLANS

A111

A111 1/4" = 1'-0"



¹ REFER TO FINISH PLANS FOR ROOM ORIENTATION WHEN WALLS ARE NOT ALIGNED TO CARDINAL DIRECTIONS ² REFER TO MATERIAL LEGEND AND INTERIOR ELEVATIONS FOR ADDITIONAL EXPOSED HARDWARE STYLES AND FINISHES

ROOM FINISH SCHEDULE											
		FLC	FLOORS				CASEWORK ²				
ROOM #	ROOM NAME	FLOOR FINISH	BASE FINISH	NORTH	EAST	SOUTH	WEST	COUNTERTOP	CABINETS	HARDWARE	COMMENTS
101	GATHERING	ETR	ETR	PT-1/ETR	PT-1/ETR	PT-1/ETR	PT-1/ETR				PT-1 TO BE APPLIED TO DRYWALL SURFACES ONLY
101.1	CORRIDOR	ETR	ETR		PT-1		PT-1				
101.2	CORRIDOR	ETR	ETR		PT-1		PT-1				
102	WORSHIP	ETR	ETR	ETR	ETR	ETR	ETR				
04	PASSAGE	ETR	WB-1	PT-1	PT-1	PT-1	PT-1				
04.1	WOMEN	ETR	PTB-1	PT-1	PT-1	PTRN-A	PTRN-A				FLOOR INSTALLATION TO BE 1/3 OFFSET. SEE PREN-A FOR INFO
04.2	MEN	ETR	PTB-1	PTRN-A/PT-1	PT-1	PTRN-A	PTRN-A				
07	LIFT	ETR	EB-1	PT-1	PT-1	PT-1	PT-1				
08	SERVING	LVT-1	WB-1	PT-1	PT-1	PT-1	PT-1	SS-1	PLAM-1		
08.1	COATS	ETR	WB-1	PT-1	PT-1	PT-1	PT-1				
10	LIBRARY	ETR	RB-1	PT-1	PT-1	PT-1	PT-1				
10.1	STORAGE	ETR	RB-1	PT-1	PT-1	PT-1	PT-1				
11	PARENTING	LVT-2	RB-1	PT-1	PT-3	PT-1	PT-1				
11.1	STORAGE	ETR	ETR	ETR	ETR	ETR	ETR				
11.2	STORAGE	LVT-2	RB-1	PT-1	PT-1	PT-1	PT-1				
15	FELLOWSHIP HALL	ETR	ETR	ETR	ETR	ETR	ETR				

¹ REFER TO "MATERIAL LEGEND - EXTERIOR" FOR ADDITIONAL MATERIALS ² REFER TO "FINISH FLOOR PLAN GENERAL NOTES" FOR ADDITIONAL INFORMATION

MATERIAL LEGEND - INTERIOR ¹²										
CODE	ТҮРЕ	MANUFACTURER	PATTERN / STYLE	COLOR / FINISH	SIZE	CONTACT	COMMENTS			
ACT-1 (LOWER LEVEL)	ACOUSTIC CEILING TILE	ARMSTRONG	ULTIMA BEVELED TEGULAR 1911, PRELUDE XL	WHITE	24" x 24" x 3/4", 15/16" GRID	EDAN KIRCHINO (414) 229-8702				
ACT-2 (TOILET RM)	ACOUSTIC CEILING TILE	ARMSTRONG	CLEAN ROOM VL - SQUARE LAY IN 15/16" EDGE	WHITE	24" x 24" x 5/8"	EDAN KIRCHINO (414) 229-8702				
ACT-3 (SANC.)	ACOUSTIC CEILING TILE	ARMSTRONG				EDAN KIRCHINO (414) 229-8702				
GRT-1 (GROUT)	GROUT	BOSTIK	SANDED; HIGH PERFORMANCE GROUT W/ INTEGRAL SEALER	CLAY H197			FOR USE WITH PCT-1 AND PTB-1			
LVT-1 (WOOD)	LUXURY VINYL TILE	INTERFACE	CRITERION CLASSIC WOODGRAINS	C00105 CEDAR	12.5CM x 1M	DANIELLE GALATI (715) 409-14080	INSTALLATION: STAGGER			
LVT-2 (LINEN)	LUXURY VINYL TILE	INTERFACE	CRITERION CLASSICS WOVENS	C00302 TWINE	50CM x 50CM	DANIELLE GALATI (715) 409-14080	INSTALLATION: ASHLAR			
PCT-1 (TILE)	TILE	DALTILE	SOCEITY	SO46 CIVIC SAND	12X24	HILLARY BUSS (317) 910-2527	FLOOR TILE & WALL TILE. SEE PTRN-A FOR INSTALL INFO			
PLAM-1 (CABS)	PLASTIC LAMINATE	FORMICA	MATTE FINISH	OILED LEGNO 8846-58		MELISSA WESSING (262) 716-2164	VERTICAL SURFACES IN RECEPTION & CHECK OUT			
PT-1 (FIELD)	PAINT	SHERWIN WILLIAMS		SW7036 ACCESSIBLE BEIGE		SUSAN SIENKOWSKI (312) 565-0622	PT-1 APPLICATION TO BE DRYWALL SURFACES ONLY			
PT-2 (FRAMES)	PAINT	SHERWIN WILLIAMS		SW7020 BLACK FOX		SUSAN SIENKOWSKI (312) 565-0622	DOOR FRAMES			
PT-3 (ACCENT)	PAINT	SHERWIN WILLIAMS		SW9644 PORTSMOUTH		SUSAN SIENKOWSKI (312) 565-0622	ACCENT			
PT-4 (CEILING)	PAINT	SHERWIN WILLIAMS		SW7757 HIGH REFLECTIVE WHITE		SUSAN SIENKOWSKI (312) 565-0622	CEILING PAINT			
PTB-1 (BASE)	TILE	DALTILE	SOCEITY	SO46 CIVIC SAND	COVE BASE	HILLARY BUSS (317) 910-2527	TOP WITH STAINLESS STEEL TRIM PIECE			
RB-1 (BASE)	RESILIENT BASE	TARKETT		BURNT UMBER						
SS-1 (CTOP)	SOLID SURFACE	HI MACS		GT914 MERINO			HORIZONTAL SURFACES AT SERVING AREA			
ST-1 (STONE)	STONE		MATCH EXISTING	MATCH EXISTING						
WB-1 (BASE)	WOOD BASE			STAIN TO MATCH EXISITNG						
WD-1 (WOOD)	WOOD SPECIES & STAIN		PLAIN SLICED WHITE MAPLE	CLEAR COAT						



N58 W6181 COLUMBIA RD. P.O. BOX 332 CEDARBURG, WISCONSIN 53012 PH. (262) 377-8001 FX. (262) 377-8003


PROJEC

ST. PAUL LUTHERAN PHASE 1 -RENOVATION

525 SUPERIOR AVE TOMAH, WI 54660

ISSUE

NO. REV. DATE DESCRIPTION

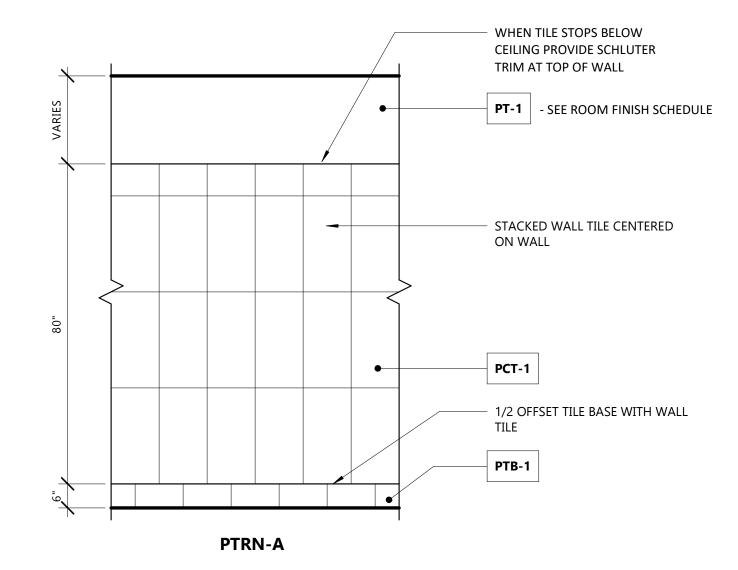

GENERAL NOTES:

1) SEE ROOM FINISH SCHEDULE FOR PAINT COLORS

2) SEE MATERIAL LEGEND - INTERIOR FOR MATERIAL TYPES

3) PROVIDE METAL TRIM AT FLOOR TO WALL, INSIDE CORNERS, OUTSIDE CORNERS AND EXPOSED EDGES. BASIS OF DESIGN: SCHLUTER SYSTEMS



PROJECT INFO

Date
08.22.23


Project No.
22.009


SHEET TITLE

FINISH SCHEDULE

Δ120

A120

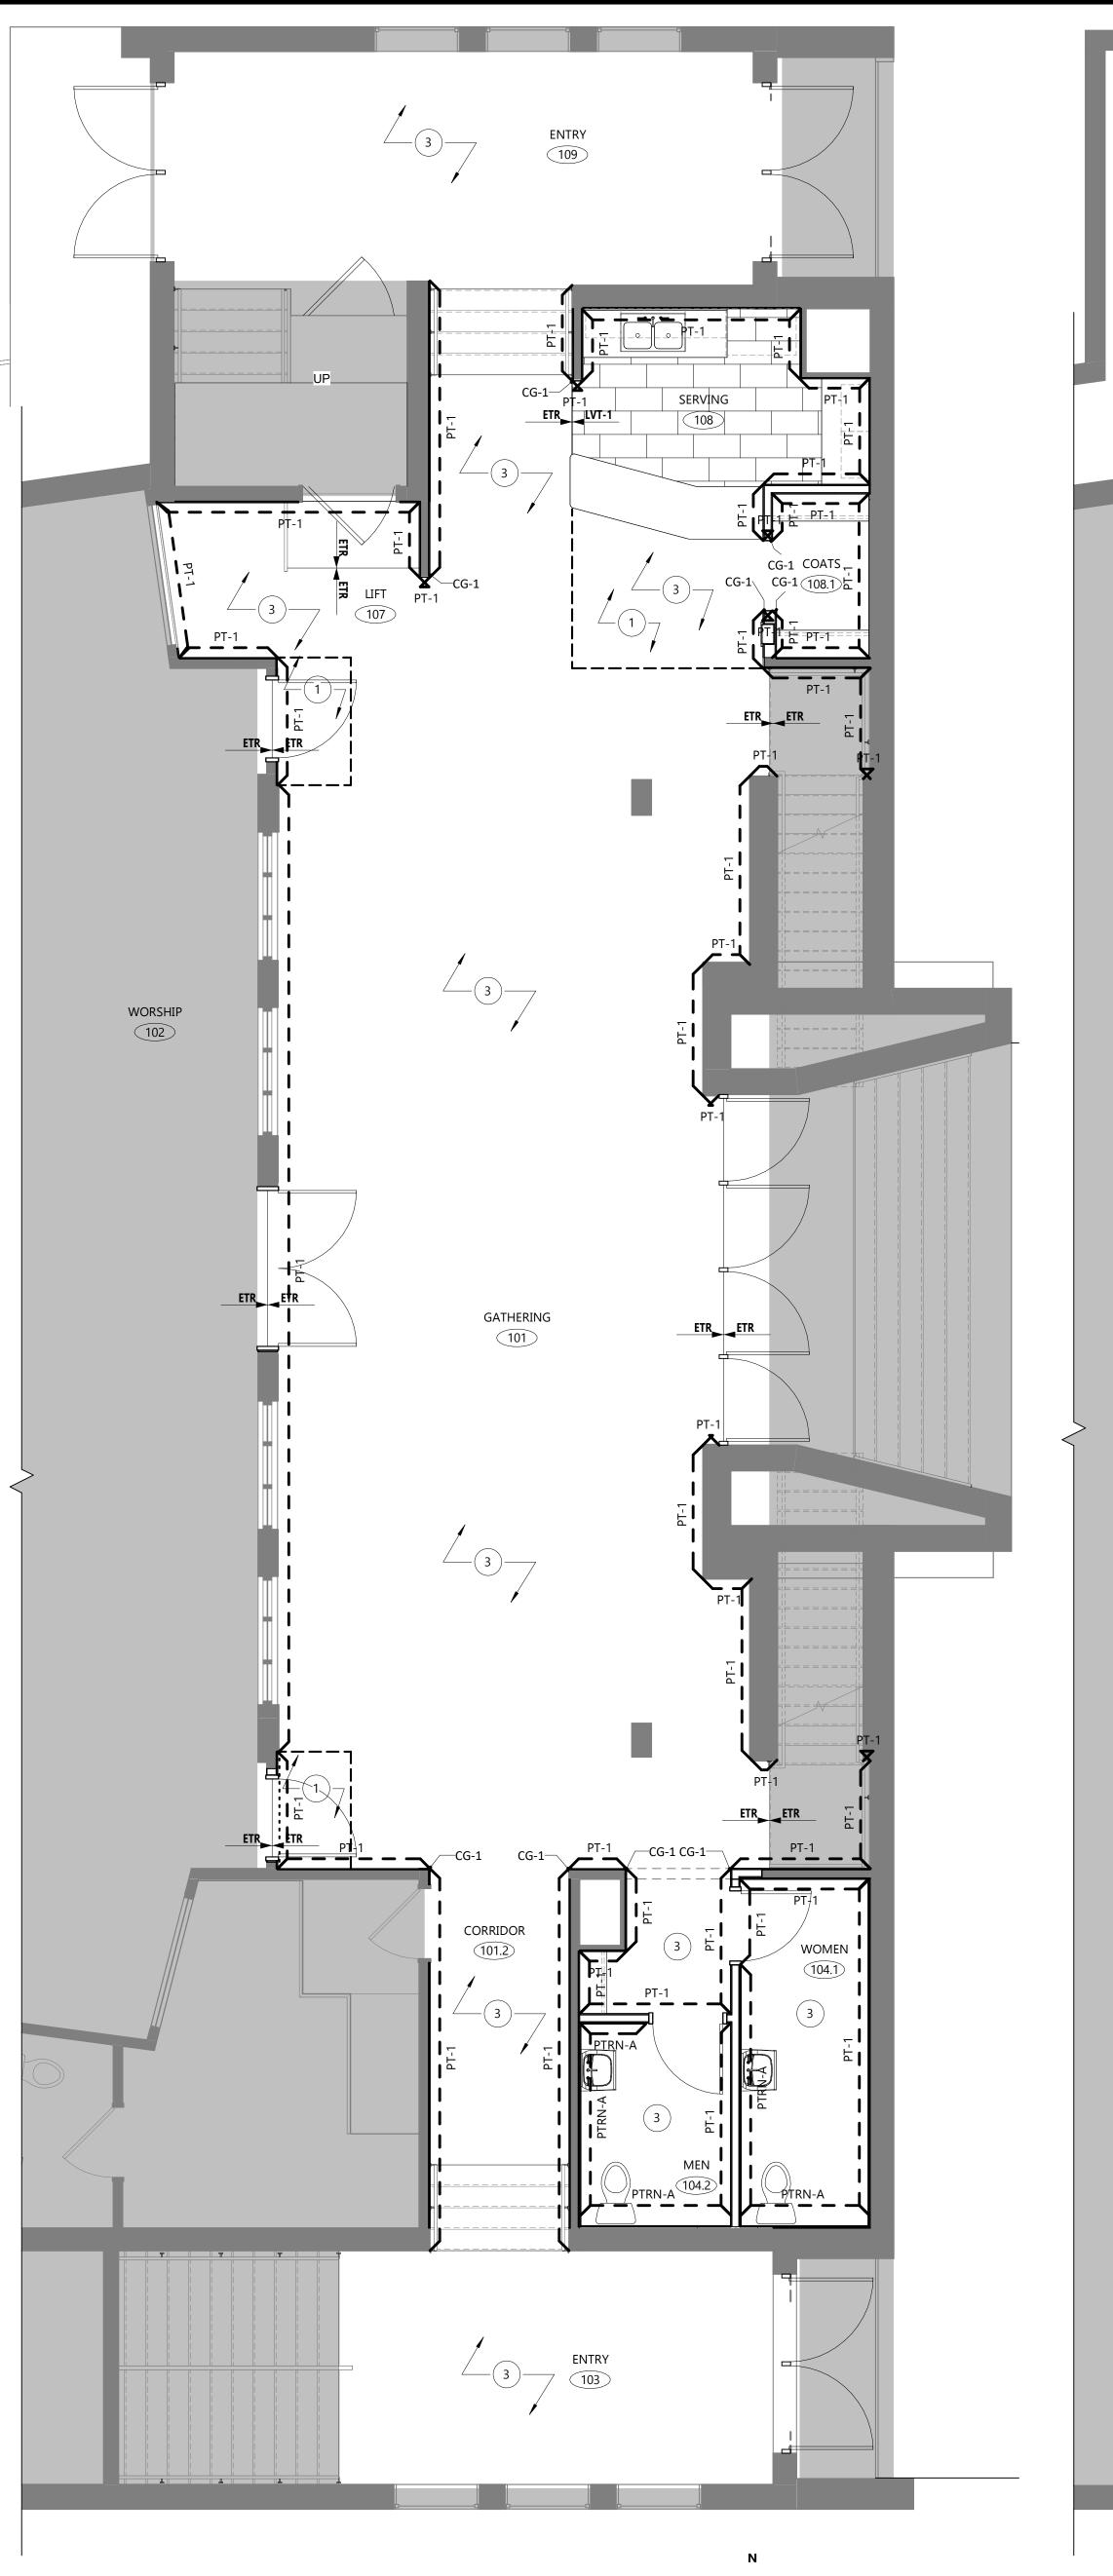

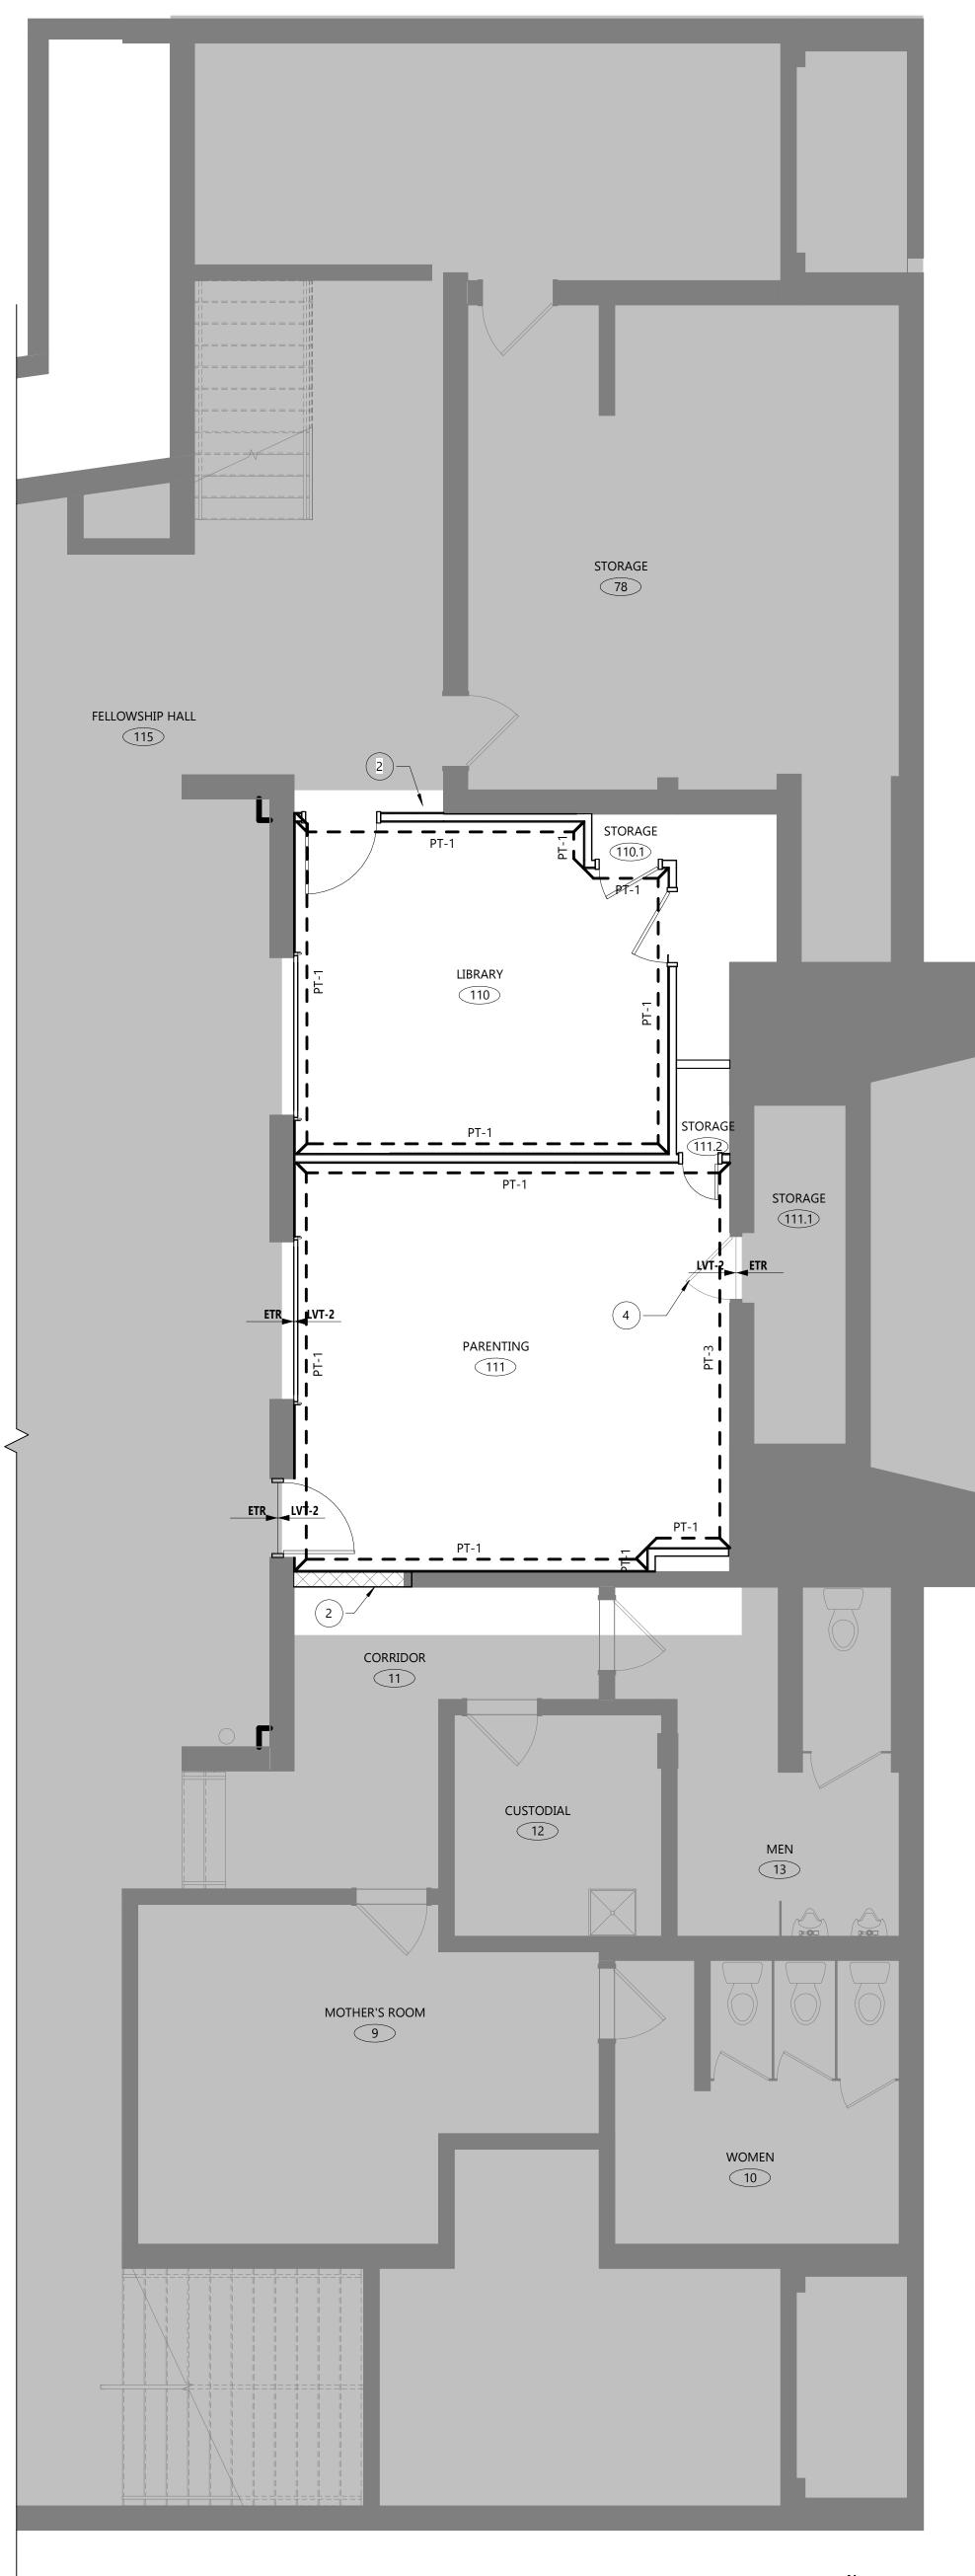

PROJECT ABBI	REVIATION LIST	
ACT ADA ADDL	ACOUSTICAL CEILING TILE AMERICAN WITH DISABILITIES ACT ADDITIONAL	LAV LTG
ADJ	ADJACENT, ADJOINING, OR ADJUSTABLE	MAS MATL
AFF ALT APPROX	ABOVE FINISHED FLOOR ALTERNATE APPROXIMATE	MAX MECH MEZZ
BD BLDG BO	BOARD BUILDING BOTTOM OF	MFR MIN MISC MO
BOT	BOTTOM	MTL
CAB CALC CFCI	CABINET CALCULATION CONTRACTOR FURNISHED, CONTRACTOR INSTALLED	NA NIC NO
CIP CJ	CAST IN PLACE CONSTRUCTION JOINT OR CONTROL JOINT	NOM NTS
CL CLG CMU	CENTER LINE CEILING CONCRETE MASONRY UNIT	OC OD
COL CONC	COLUMN CONCRETE	OFCI
CONT CONTR COORD	CONTINUOUS CONTRACT OR CONTRACTOR COORDINATE	OFOI OH
CORR CPT CT	CORRIDOR CARPET CERAMIC TILE	OPH OPNG OPP
DEG DEMO DEPT DIA DIM DN DS DW DWG	DEGREE DEMOLISH, DEMOLITION DEPARTMENT DIAMETER DIMENSION DOWN DOWNSPOUT DISHWASHER OR DRYWALL DRAWING	PERP PLAM PR PREFAB PRELIM PROJ PROP PSI PTRN-X
EA EIFS	EACH EXTERIOR INSULATION AND FINISH SYSTEM	QT QTY
EJ EL ELEC	EXPANSION JOINT ELEVATION ELECTRIC	R RCP RD
EQ EQUIP ESMT EXIST EXT	EQUAL EQUIPMENT EASEMENT EXISTING EXTERIOR, EXTERNAL, OR EXTINGUISHER	REF REINF REQD REV RFG RM
ETR	EXISTING TO REMAIN	RO ROW
FD FDN FE FEC FIN FLR FP FT FTG FURN	FLOOR DRAIN FOUNDATION FIRE EXTINGUISHER FIRE EXTINGUISHER CABINET FINISH FLOOR FIRE PROTECTION OR FIREPROOF FOOT OR FEET FOOTING FURNISH OR FURNITURE	SCHED SF SIM SPEC SQ SQ IN STC STOR STRUCT SUSP
GA GB GALV GLU LAM GOVT GYP	GAUGE OR GYPSUM ASSOCIATION GRAB BAR GALAVANIC OR GALVANIZED GLUED LAMINATED WOOD GOVERNMENT GYPSUM	SYS T&G TEL TEMP THRU

LIGHTING **MASONRY** MATERIAL MAXIMUM MECHANICAL MEZZANINE MANUFACTURER MINIMUM OR MINUTE MISCELLANEOUS MASONRY OPENING OR MOTOR OPERATED METAL

OUTSIDE DIAMETER OR OUTSIDE

LAVATORY

NOT APPLICABLE

NOT TO SCALE

ON CENTER

DIMENSION

OWNER FURNISHED,

OWNER FURNISHED, OWNER INSTALLED

OPPOSITE HAND

PERPENDICULAR

PREFABRICATED

PRELIMINARY

PROJECT

PROPERTY

QUARRY TILE

RADIUS OR RISER

REFLECTED CEILING PLAN

REFERENCE OR REFRIGERATOR

ROAD OR ROOF DRAIN

QUANTITY

REINFORCE

ROUGH OPENING RIGHT OF WAY

SPECIFICATION

SQUARE INCH

SQUARE FOOT (FEET)

SOUND TRANSMISSION CLASS

STRUCTURE OR STRUCTURAL

SUSPEND OR SUSPENDED

TONGUE AND GROOVE

TEMPERATURE OR TEMPORARY

UNLESS NOTED OTHERWISE

VINYL COMPOSITION TILE

REQUIRED

REVISION ROOFING

SCHEDULE

SIMILAR

SQUARE

STORAGE

SYSTEM

TELEPHONE

THROUGH

TOP OF WALL

UNFINISHED

TOP OF

TOTAL

TYPICAL

UTILITY

VERTICAL

WITHOUT

WOOD

TO TOT

TYP

UNFIN

UNO

UTIL

VCT

VERT

W/O

WD

ROOM

PLASTIC LAMINATE

OPENING

OPPOSITE

CONTRACTOR INSTALLED

OVERHANG OR OVERHEAD

POUNDS PER SQUARE INCH

PATTERN "X" FOR WALL TILE

NUMBER NOMINAL

NOT IN CONTRACT

GYPSUM GWB GYPSUM WALL BOARD HOSE BIBB

HEIGHT HOLLOW METAL HORIZ HORIZONTAL HOUR CONDITIONING HOT WATER INCHES

HEATING, VENTILATION, AND AIR INTERIOR

FINISH FLOOR PLAN GENERAL NOTES:

TILE CRACKING AT EDGES.

A. THIS DRAWING INDICATES THE GENERAL LOCATION OF FIXTURES, ARCHITECTURAL DETAILS AND FINISHES. REFER TO ENGINEERING DRAWINGS FOR ADDITIONAL INFORMATION AND SPECIFICATIONS.

SUBCONTRACTORS MUST REFERENCE FINISH FLOOR PLANS, ROOM FINISH SCHEDULE, MATERIAL LEGEND, REFLECTED CEILING PLANS, INTERIOR ELEVATIONS, DETAILS, AND SPECIFICATIONS FOR FULL FINISHES DESIGN INTENT AND SCOPE OF WORK.

LEVEL THE SUBFLOOR AND/OR PROVIDE APPROPRIATE FLOORING TRANSITION STRIPS WHERE DISSIMILAR MATERIALS MEET, PROVIDING A SMOOTH, LEVEL PATH OF TRAVEL. UTILIZE SLIM LINE VINYL TRANSITION STRIPS IN A COLOR TBD. VERIFY WITH OWNER PRIOR TO ORDER PLACEMENT. WHERE FLOOR TILE AND/OR CONCRETE ABUTS OTHER FLOOR MATERIALS, IT SHALL HAVE A METAL SCHLUTER TRIM EDGE TO PREVENT

HATCH PATTERNS ON FINISH PLAN ARE REPRESENTATIVE OF DIFFERENT MATERIALS AND DO NOT DESIGNATE TILE LAYOUTS/SPACING/ETC.

VERIFY ELECTRICAL DEVICE AND COVER PLATE COLORS WITH ARCHITECT PRIOR TO INSTALLATION.

MECHANICAL GRILLES AND DIFFUSERS SHALL BE PAINTED TO MATCH ADJACENT WALL

SURFACE, U.N.O.

CONTRACTOR SHALL PROVIDE ARCHITECT A FLOOR PLAN PROVIDING PROPOSED CONTROL JOINT LOCATIONS PRIOR TO INSTALLATION.

FLOORING TRANSITIONS AT DOOR THRESHOLDS SHALL OCCUR AT CENTER OF DOOR WHEN CLOSED. U.N.O.

SEAL ALL GROUT AND FLOORING AS RECOMMENDED BY MANUFACTURER.

GROUT HAS BEEN SPECIFIED WITH EACH PORCELAIN TILE. PLEASE SEE FINISH LEGEND FOR SPECIFICATIONS. GROUT JOINTS TO BE MINIMAL AS POSSIBLE, REVIEW WITH ARCHITECT PRIOR TO INSTALLATION.

ALL RESILIENT SHEET VINYL SEAMS SHALL BE HEAT WELDED WITH RODS TO MATCH PER MANUFACTURER. FLOORING CONTRACTOR SHALL APPLY CLEAR SILICONE BEAD AT BASE OF DOOR FRAME / RESILIENT SHEET VINYL JOINT, PROVIDING A SEAMLESS WATER

ALL TILE INSTALLATIONS SHALL CONFORM TO LATEST EDITION OF THE TILE COUNCIL OF NORTH AMERICA HANDBOOK FOR CERAMIC, GLASS AND STONE TILE INSTALLATION.

M. IN NEW CONSTRUCTION, PROVIDE CORNER GUARDS ON ALL OUTSIDE CORNERS EXCEPT DECORATIVE WALLS. SEE FINISH LEGEND FOR SPECIFICATION AND COLOR. WHERE EXISTING WALLS ARE BEING REFINISHED, REMOVE EXISTING CORNER GUARDS

AND REPLACE WITH NEW IF THEY DO NOT MATCH NEW PAINT SEE ROOM FINISH SCHEDULE AND FINISH FLOOR PLANS FOR INSTALLATION AND LOCATION OF WALL PROTECTION. SEE FINISH LEGEND FOR SPECIFICATION AND COLOR.

WALK-THRU WITH OWNER AND ARCHITECT IS REQUIRED PRIOR TO PAINT AND WALL PROTECTION LOCATION FINALIZATION AND PAINT & WALL PROTECTION ORDER

REMOVE AND SECURELY STORE ALL MISCELLANEOUS HARDWARE AND SURFACE FITTINGS / FASTENINGS (E.G. ELECTRICAL PLATES, MECHANICAL LOUVERS, SIGNAGE, WASHROOM ACCESSORIES, LIGHT FIXTURE TRIM, ETC.) FROM WALLS, CEILINGS, DOORS, AND FRAMES PRIOR TO (RE)PAINTING. COORDINATE W/ OWNER REPRESENTATIVE FOR REMOVAL AND REINSTALLATION OF OWNER EQUIPMENT. CAREFULLY CLEAN AND REINSTALL ALL SUCH ITEMS UPON COMPLETION OF (RE)PAINTING WORK IN EACH AREA. DO NOT USE SOLVENT OR REACTIVE CLEANING AGENTS ON ITEMS THAT WILL MAR OR REMOVE FINISHES (E.G. LACQUER FINISHES).

DOORS SHALL BE REMOVED BEFORE (RE)PAINTING TO PAINT BOTTOM AND TOP EDGES AND THEN RE-HUNG.

PROTECT ALL ADJACENT INTERIOR SURFACES AND AREAS, INCLUDING RATING AND INSTRUCTION LABELS ON DOORS, FRAMES, EQUIPMENT, PIPING, ETC., FROM (RE) PAINTING OPERATIONS/DAMAGE USING DROP CLOTHS, SHIELDS, MASKING, TEMPLATES, OR OTHER SUITABLE PROTECTIVE MEANS. CORRECT ANY DAMAGE CAUSED BY FAILURE TO PROVIDE SUCH PROTECTION.

WINDOW SHADES LOCATIONS HAVE BEEN CODED ON THE FINISH FLOOR PLANS. SEE FINISH LEGEND FOR SPECIFICATIONS.

U. INTERIOR PAINT FINISHES (TYPICAL) U.N.O: EGGSHELL: WALLS, COLUMNS, SOFFITS & BULKHEADS FLAT: CEILINGS SEMI-GLOSS FINISH: HM DOOR FRAMES, HM DOORS

ALL TOILET ROOM WALL SURFACES SHALL BE PAINTED WITH WATER-BASED EPOXY PAINT W/ SEMI-GLOSS FINISH, U.N.O.

W. GENERAL CONTRACTOR AND FLOORING SUB-CONTRACTOR TO VERIFY QUANTITY OF ATTIC STOCK FLOORING PRIOR TO BIDDING. ADJUST ACCORDINGLY BASED ON ATTIC

WINDOW SILL MATERIAL(S) ARE CALLED OUT IN THE COMMENTS COLUMN OF THE MATERIAL LEGEND

Y. AT EXISTING SLABS, CONTRACTOR TO TEST FOR MOISTURE AND LEVELNESS PRIOR TO

Z. ALL INTERIOR JOINT SEALANTS AT WINDOWS TO BE CLEAR PAINTABLE SEALANT, U.N.O.

FINISH PLAN - SYMBOL KEY

XXX-1 XXX-2 MATERIAL TRANSITION LOCATION

TAG #

PATTERN/GRAIN DIRECTION

ARCHITECTURAL CONTROL JOINT. SEE SPECIFICATIONS FOR ADDITIONAL CONTROL JOINTS REQUIRED BY MATERIAL

DESCRIPTION

KEYED FINISH FLOOR PLAN NOTES

PATCH AND REPAIR PORTION OF EXISTING FLOOR.

PATCH TO MATCH EXISITING PAINT, BASE & FLOOR

EXISTING NATURAL STONE TO BE STRIPPED/DEEP CLEANED, SILICONE GROUT FILLED, HONED, AND SEALED. FINISHED SURFACE TO MEET OR EXCEED CODE REQUIREMENTS FOR SLIP RESISTANCE.

PAINT EXISTING DOOR AND FRAME TO MATCH ADJACENT WALL.

P.O. BOX 332 CEDARBURG, WISCONSIN 53012 PH. (262) 377-8001 FX. (262) 377-8003

N58 W6181 COLUMBIA RD.

ST. PAUL **LUTHERAN** PHASE 1 -**RENOVATION**

525 SUPERIOR AVE TOMAH, WI 54660

NO. REV. DATE DESCRIPTION

PROJECT INFO

08.22.23

Project No. 22.009

SHEET TITLE


FINISH FLOOR PLANS

A121

FINISH FLOOR PLAN - MAIN LEVEL



FINISH FLOOR PLAN - LOWER LEVEL 1/4" = 1'-0"



LOWER LEVEL FLOOR PLAN 1/4" = 1'-0"

SCHEMATIC POWER/DATA PLAN GENERAL NOTES:

- A. THE POWER/ DATA DRAWINGS ARE FOR REFERENCE ONLY. THE DESIGN/BUILD ELECTRICAL ENGINEER IS RESPONSIBLE FOR FINAL DESIGN.
- B. ELECTRICAL ENGINEER TO PROVIDE ANY AND ALL ADDITIONAL ELECTRICAL REQUIREMENTS NOT SHOWN HERE PER OWNER MEETINGS, EQUIPMENT NEEDS, AND
- CODE REQUIREMENTS. C. ALL WORK UNDER THIS CONTRACT SHALL BE PERFORMED IN STRICT COMPLIANCE WITH ALL LOCAL CODES, ORDINANCES AND REGULATIONS OF THE AUTHORITIES HAVING
- D. CONTRACTOR SHALL OBTAIN ALL PERMITS REQUIRED TO PERFORM WORK IN ACCORDANCE WITH REQUIREMENTS AND PROCEDURES OF ANY AND ALL AUTHORITIES HAVING JURISDICTION.
- CONTRACTOR SHALL FIELD VERIFY ALL EXISTING CONDITIONS, DIMENSIONS, AND COORDINATES. THE CONTRACTOR SHALL NOTIFY THE ARCHITECT OF ANY DISCREPANCIES BETWEEN EXISTING CONDITIONS AND THE CONTRACT DOCUMENTS.
- CONTRACTOR SHALL REVIEW ALL CONTRACT DOCUMENTS AND NOTIFY THE ARCHITECT OF ANY CONCERNS PRIOR TO STARTING WORK.
- CONTRACTOR SHALL COORDINATE WITH THE WORK OF OTHERS NOT INCLUDED IN THE CONTRACT AS DIRECTED BY THE OWNER.
- H. ALL VERTICAL DIMENSIONS TO BE ABOVE FINISH FLOOR (A.F.F.) U.N.O.
- DUPLEX OUTLET MOUNTED 18" AFF UNLESS NOTED OTHERWISE (C) - ABOVE COUNTER OUTLET - MOUNT 4" ABOVE COUNTERTOP OR
 - COUNTER BACKSPLASH WERE PRESENT (D) - DEDICATED CIRCUIT
 - (GFCI) GROUND FAULT CIRCUIT INTERRUPTER
 - (H) MOUNTED HORIZONTALLY
 - (REF) REFRIGERATOR (TV) - TELEVISION OUTLET, COORDINATE HEIGHT AND LOCATION WITH
 - TV MOUNTING BRACKET (USB) - DUPLEX OUTLET W/ (2) USB PORTS
 - (XX") INSTALL @ HEIGHT AFF INDICATED
- DOUBLE DUPLEX OUTLET MOUNTED 18" AFF UNLESS NOTED OTHERWISE (C) - ABOVE COUNTER OUTLET - MOUNT 4" ABOVE COUNTERTOP OR
 - COUNTER BACKSPLASH WERE PRESENT (D) - DEDICATED CIRCUIT
 - (GFCI) GROUND FAULT CIRCUIT INTERRUPTER (REF) - REFRIGERATOR
 - (TV) TELEVISION OUTLET W/ (2) USB PORTS (XX") - INSTALL @ HEIGHT AFF INDICATED
- SPECIAL WALL OUTLET COORDINATE HEIGHT, LOCATION & TYPE W/ EQUIPMENT OR FURNITURE SUPPLIER
- \$ SWITCH MOUNTED 42" AFF UNLESS NOTED OTHERWISE
 - (3) 3 WAY SWITCH (4) - 4 WAY SWITCH
 - (MS) MOTORIZED SHADE (PS) - MOTORIZED PROJECTION SCREEN
- (XX") INSTALL @ HEIGHT AFF INDICATED
- † DIMMER SWITCH MOUNTED 42" AFF UNLESS NOTED OTHERWISE (3) - 3 WAY SWITCH
 - (4) 4 WAY SWITCH (XX") - INSTALL @ HEIGHT AFF INDICATED
- SPECIAL OUTLET COORDINATE POWER/DATA LOCATIONS, QUANTITIES & TYPE W/ EQUIPMENT VENDOR.
 - (AD) AUTO DOOR OPERATOR
 - (DW) DISHWASHER
 - (DR) DATA RACK (EDF) - ELECTRONIC DRINKING FOUNTAIN & BOTTLE FILLER
 - (ELEV) ELEVATOR (FP) - FLAG POLE
 - (FRN) FURNITURE
 - (GD) GARBAGE DISPOSAL
 - (MS) MOTORIZED SHADE
 - (PR) PULL DOWN RECEPTACLE (SG) - SIGNAGE
 - MECHANICAL CONNECTION COORDINATE W/ MECHANICAL
 - (CUH) CABINET UNIT HEATER (SC) SPLIT UNIT SPACE COOLER
- ▼ DATA OUTLET MOUNTED 18" AFF W/ (2) PORTS UNLESS NOTED OTHERWISE (AV) - AUDIO/VISUAL SYSTEM PATHWAY. COORDINATE PATHWAY
 - REQUIREMENTS W/ OWNER'S A/V SYSTEM VENDOR (C) - ABOVE COUNTER OUTLET - MOUNT 4" ABOVE COUNTERTOP OR COUNTER BACKSPLASH WERE PRESENT
 - (HDMI) HDMI CONNECTION. SEE PLANS FOR CONNECTION POINTS. (P2P) - POINT-TO-POINT CONNECTION. COORDINATE TYPE & HEIGHT W/
 - OWNER IT TEAM (REF) - REFRIGERATOR TEMPERATURE MONITORING
 - (TV) TELEVISION CONNECTION. COORDINATE TYPE & HEIGHT W/ OWNER IT TEAM
 - (USB) FEMALE USB JACK FOR POINT-TO-POINT CONNECTION (W) - VOICE JACK W/ WALL MOUNTED PHONE PLATE @ 44" AFF U.N.O.
 - PROVIDE NUMBER OF PORTS INDICATED (XX") - INSTALL @ HEIGHT AFF INDICATED
- - (DB) DURESS BUTTON. COORDINATE EXACT LOCATION & TYPE W/ OWNER
 - (DB-P) DURESS BUTTON, MOBILE PENDANT (DP) - DOOR POSITION SWITCH
 - (ED-DE) DELAYED EGRESS EXIT DEVICE
 - (MHO) MAGNETIC HOLD OPEN (EL) - ELECTROMAGNETIC LOCK (EL-DE) - DELAYED EGRESS ELECTROMAGNETIC LOCK
 - (ELL-FS) ELECTRIFIED LEVERSET, FAIL SAFE (ELL-FSE)- ELECTRIFIED LEVERSET, FAIL SECURE
 - (EPT) ELECTRIC POWER TRANSFER (ES-FS) - ELECTRIC STRIKE, FAIL SAFE (ES-FSE) - ELECTRIC STRIKE, FAIL SECURE
 - (LB) LOCKBOX, MONITORED (LK) - LOCKDOWN BUTTON. COORDINATE EXACT LOCATION / OWNER
 - (PE) "PUSH TO EXIT" OVERRIDE BUTTON (PS) - POWER SUPPLY BY DOOR SUPPLIER. COORDINATE REQUIREMENTS
 - W/ SECURITY, FIRE ALARM, & ELECTRICAL CONTRACTOR (RX-OH) - REQUEST TO EXIT - OVERHEAD MOTION DETECTOR (RX-LK) - REQUEST TO EXIT - FEATURE BUILT-IN TO LOCKSET OR EXIT DEVICE
- CAMERA EQUIPMENT BY OWNER. COORDINATE ROUGH-IN LOCATIONS & REQUIREMENTS W/ OWNER SECURITY TEAM.
 - COORDINATE ALL PENETRATIONS WITH GENERAL CONTRACTOR (90) - 90 DEGREE (180) - 180 DEGREE
- (360) 360 DEGREE PAGING AND SOUND SYSTEM
- (SP) OVERHEAD SPEAKER
- WAP WIFI ACESS POINT **CR** CARD READER (BY OWNER)
- **PP** AUTOMATIC DOOR OPERATOR PUSH PAD
- TS AUTOMATIC DOOR OPERATOR TOUCHLESS SENSOR
- EXIT LIGHT CEILING MOUNTED. SHADING INDICATES FACE OF EXIT. PROVIDE DIRECTIONAL ARROWS AS INDICATED ON PLANS
- EXIT LIGHT WALL MOUNTED. SHADING INDICATES FACE OF EXIT. PROVIDE DIRECTIONAL ARROWS AS INDICATED ON PLANS (F) - FLOOR PROXIMITY SIGN INSTALLED PER NFPA 1 SECTION 14.14.1.6

08.22.23

Project No. 22.009

PROJECT INFO

Design

N58 W6181 COLUMBIA RD.

CEDARBURG, WISCONSIN 53012

P.O. BOX 332

PH. (262) 377-8001

FX. (262) 377-8003

ST. PAUL

LUTHERAN

PHASE 1 -

525 SUPERIOR

NO. REV. DATE DESCRIPTION


TOMAH, WI 54660


RENOVATION

SHEET TITLE SCHEMATIC POWER/DATA PLANS

A141

2 PLAN A141 / 1/4" = 1'-0"

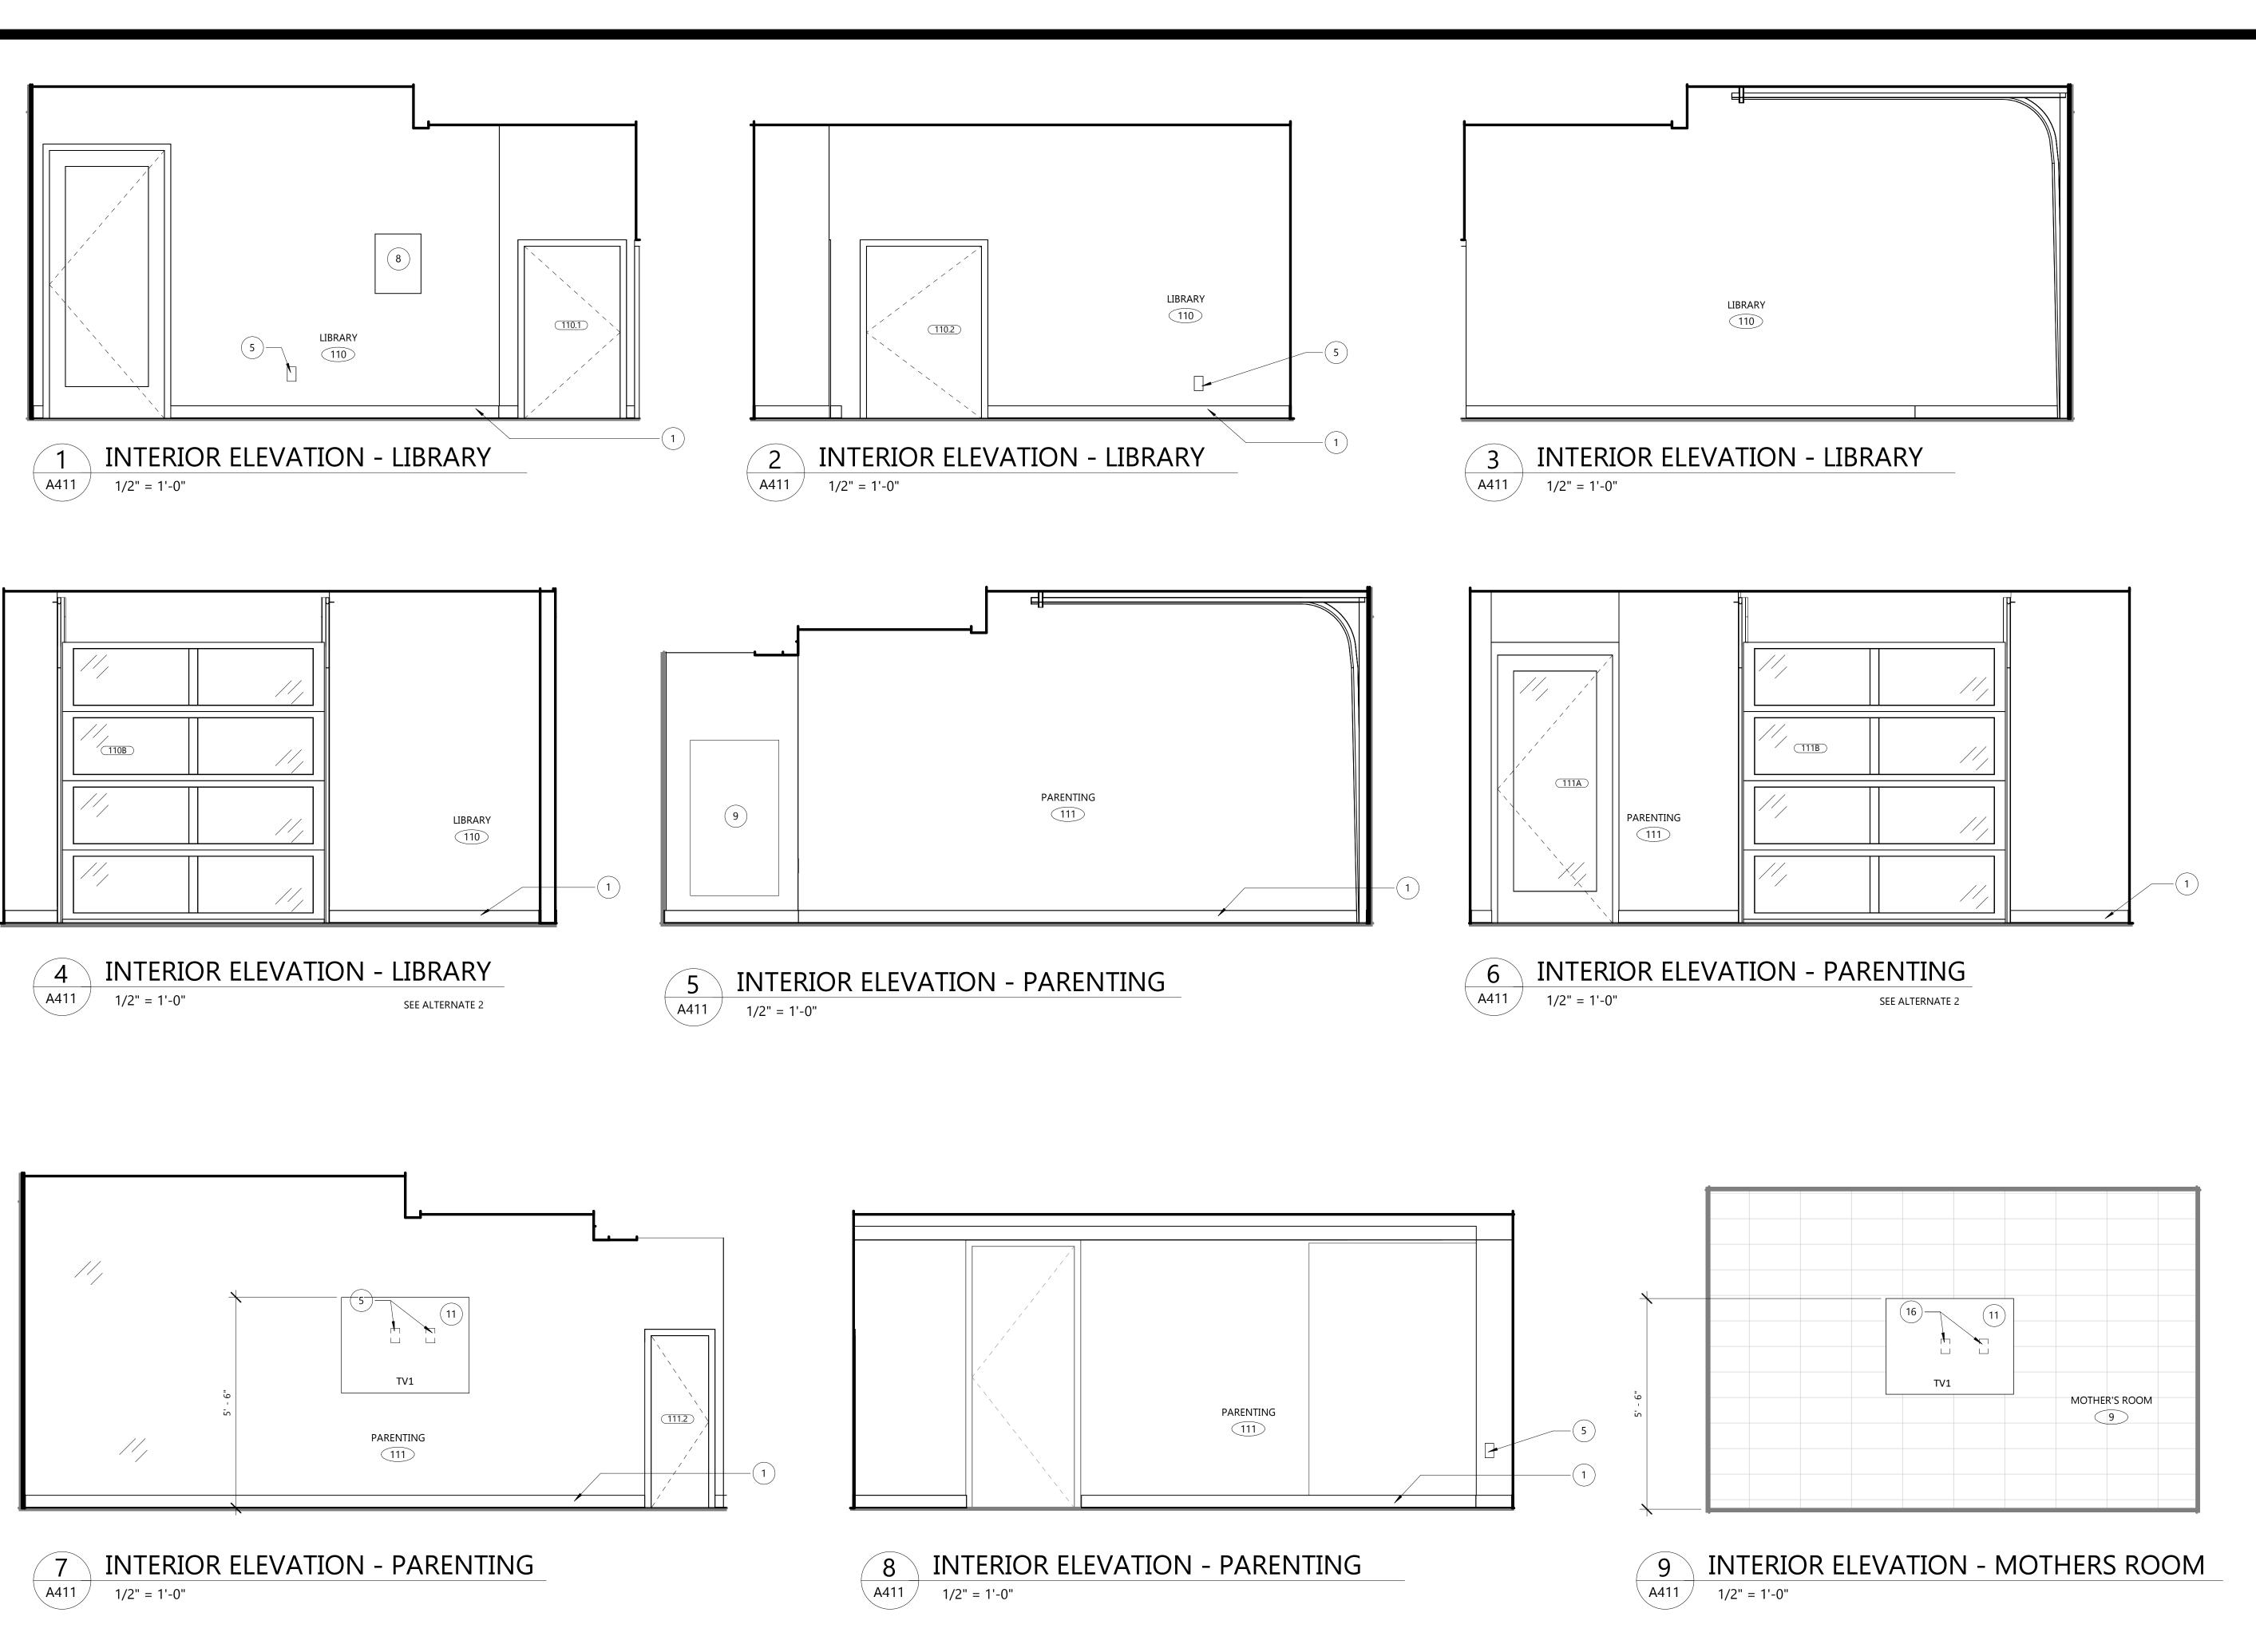

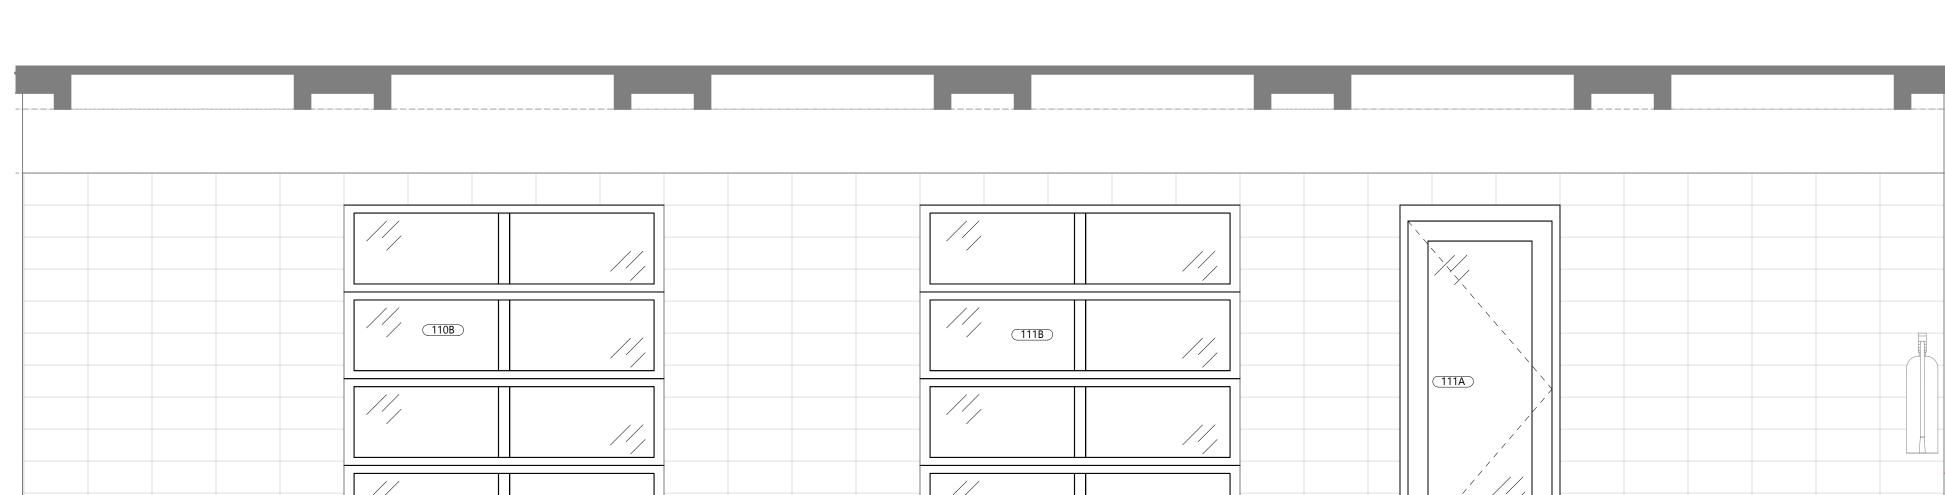

10 INTERIOR ELEVATION - FELLOWSHIP WALL A411 1/2" = 1'-0"

INTERIOR ELEVATION GENERAL NOTES:

- A. ALL EQUIPMENT, FIXTURES, AND RECEPTICALS SHALL BE MOUNTED TO MEET ACCESSIBLITY REQUIREMENTS AS SHOWN ON SHEET G002 UNLESS NOTED OTHERWISE
- B. OWNER-FURNISHED EQUIPMENT SHOWN FOR REFERENCE ONLY. COORDINATE FINAL EQUIPMENT TYPES AND REQUIREMENTS WITH OWNER.
- POWER/DATA SHOWN FOR REFERENCE ONLY. COORDINATE FINAL LOCATIONS, HEIGHTS, AND TYPES WITH EQUIPMENT AND ELECTRICAL PLANS.
- COUNTERTOPS CONTAINING ACCESSIBLE SINKS ARE SHOWN AT NOMINAL HEIGHTS. MAXIMUM HEIGHTS OF ACCESSIBLE SINKS SHALL BE MEASURED FROM FLOOR TO FINISHED RIM OF SINK. REDUCE HEIGHT OF COUNTERTOPS AND BASE CABINETS TO ACCOMMODATE RIM THICKNESS.
- REFER TO ROOM FINISH SCHEDULE AND MATERIAL KEY FOR CABINETRY FINISHES AND
- PROVIDE RADIUSED CORNERS AT ALL OUTSIDE COUNTERTOP EDGES, UNLESS NOTED OTHERWISE.
- PROVIDE VALENCES AT ALL UPPER CABINETS WITH BELOW CABINET LIGHTING. COORDINATE WITH ELECTRICAL DRAWINGS AND NOTIFY ARCHITECT OF ANY DISCREPANCIES.
- H. PROVIDE FINISHED END PANELS AT ALL EXPOSED FACES, TYP.
- CABINETRY HARDWARE TO MEET THE FOLLOWING MINIMUM SPECIFICATIONS. SEE SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
- DRAWER SLIDES: ANSI/BHMA A156.9. GRADE: HEAVY-DUTY (GRADE 1HD-100 AND GRADE 1HD-200)
- TYPE: SIDE MOUNT, FULL OVERTRAVEL EXTENSION. MATERIAL: ZINC-PLATED BALL BEARING SLIDES.
- MOTION FEATURE: SELF-CLOSING MECHANISM. PENCIL DRAWERS NOT MORE THAN 3 INCHES HIGH AND NOT MORE THAN 24 INCHES WIDE, PROVIDE 50 LB LOAD CAPACITY. GENERAL-PURPOSE DRAWERS MORE THAN 3 INCHES HIGH, BUT NOT MORE THAN 6 INCHES HIGH AND NOT MORE THAN 24 INCHES WIDE,
- PROVIDE 75 LB LOAD CAPACITY. FILE DRAWERS MORE THAN 6 INCHES HIGH OR MORE THAN 24 INCHES WIDE, PROVIDE 100 LB LOAD CAPACITY. LATERAL FILE DRAWERS MORE THAN 6 INCHES HIGH AND MORE THAN 24 INCHES BUT NOT MORE THAN 30 INCHES WIDE, PROVIDE 150 LB LOAD CAPACITY.
- LATERAL FILE DRAWERS MORE THAN 6 INCHES HIGH AND MORE THAN 30 INCHES WIDE, PROVIDE 200 LB LOAD CAPACITY. COMPUTER KEYBOARD TRAY, PROVIDE 75 LB LOAD CAPACITY.


ANSI/BHMA A156.9, B01602, 170 DEGREES OF OPENING, SELF-CLOSING.

3. CABINETS WITH MULTIPLE DRAWERS STACKED VERTICALLY SHALL BE GANG-LOCKED UNLESS NOTED OTHERWISE.

2. DOOR HINGES: FRAMELESS CONCEALED HINGES (EUROPEAN TYPE):

PROVIDE GROMMETS WHERE INDICATED ON PLANS AND WHERE LOCATED BY OWNER REPRESENTATIVE IN FIELD. FOR BIDDING PURPOSES, PROVIDE MINIMUM ONE GROMMET PER WORKSTATION OR KNEE SPACE. COORDINATE FINAL LOCATIONS AND QUANTITY WITH OWNER REPRESENTATIVE AND ARCHITECT. SEE FINISH MATERIAL LEGEND FOR GROMMET TYPE AND COLOR INFORMATION.

OWNER-FURNISHED, OWNER-INSTALLED (OFOI) EQUIPMENT. COORDINATE REQUIREMENTS WITH OWNER

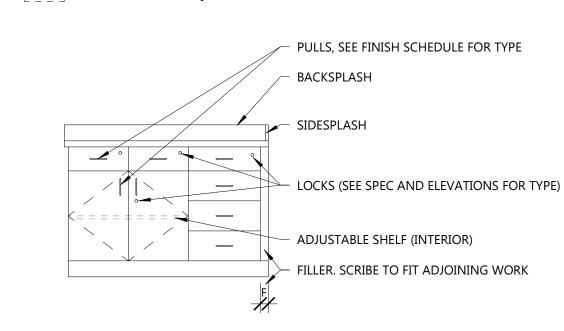

KEYED INTERIOR ELEVATIONS

- SCHEDULED BASE. SEE FINISH SCHEDULES FOR MORE INFORMATION BASE CABINET CONSTRUCTED OF PLASTIC LAMINATE ON 3/4" PARTICLE BOARD W/ADJUSTABLE PLASTIC LAMINATE 3/4" PARTICLE BOARD SHELVES (EDGE BANDED ON FOUR (4) SIDES) ON ADJUSTABLE SHELF STANDARDS. 24" DEEP UNLESS NOTED
- CABINET CONSTRUCTED OF PLASTIC LAMINATE ON 3/4" PARTICLE BOARD W/ADJUSTABLE PLASTIC LAMINATE 3/4" PARTICLE BOARD SHELVES (EDGE BANDED ON FOUR (4) SIDES) ON ADJUSTABLE SHELF STANDARDS. 14" DEEP UNLESS NOTED OTHERWISE.

DESCRIPTION

- PROVIDE NEW LIGHT FIXTURE SIMILAR TO VISA LIGHTING CB5201. BY OTHERS. USE EXISTING PENETRATION IN NATURAL STONE TILE.
- PROVIDE NEW OUTLET. BY OTHERS.

TAG #

EQUIPMENT SCHEDULE

NO.

MIC1 MICROWAVE

REFRIGERATOR

TV MONITOR

TYPE

- 3/8" SOLID SURFACE COUNTERTOP ON 3/4" PARTICLE BOARD (25" DEEP UNLESS NOTED OTHERWISE ON PLANS). FRONT WATERFALL EDGE. PROVIDE SQUARE, SET-ON BACK AND SIDE SPLASHES AS SHOWN IN ELEVATIONS.
- EXISTING ELECTRICAL PANEL TO REMAIN. PAINT TO MATCH ADJACENT WALL. PROVIDE NEW MECHANICAL GRILL IN WALL. EXTEND EXISTING DUCTWORK. PAINT TO
- MATCH ADJACENT WALL. STAINLESS STEEL DROP-IN SINK W/ GOOSENECK FAUCET & WRIST BLADES PROVIDE WALL MOUNTED MONITOR AND SPEAKERS WITH STREAMING AUDIO/VIDEO
- FROM SANCTUARY BROADCAST. PROVIDE BLOCKING AS REQUIRED. BY OTHERS. EXISTING NATURAL STONE TILE TO REMAIN.
- PAINT PORTION OF EXISTING DRYWALL PER FINISH FLOOR PLAN.
- PLASTIC LAMINATE ON 1/2" PLYWOOD BACKING.
- EXISTING WALL HEATER TO REMAIN. PROVIDE NEW SURFACE MOUNTED OUTLET. BY OTHERS.

COMMENTS

GROTH Design Group

N58 W6181 COLUMBIA RD. P.O. BOX 332 CEDARBURG, WISCONSIN 53012

PH. (262) 377-8001

FX. (262) 377-8003

PROJECT

ST. PAUL LUTHERAN PHASE 1 -**RENOVATION**

525 SUPERIOR TOMAH, WI 54660

NO. REV. DATE DESCRIPTION

PROJECT INFO


08.22.23

Project No. 22.009


SHEET TITLE

ENLARGED PLANS, INTERIOR ELEVATIONS - LOWER LEVEL


A411

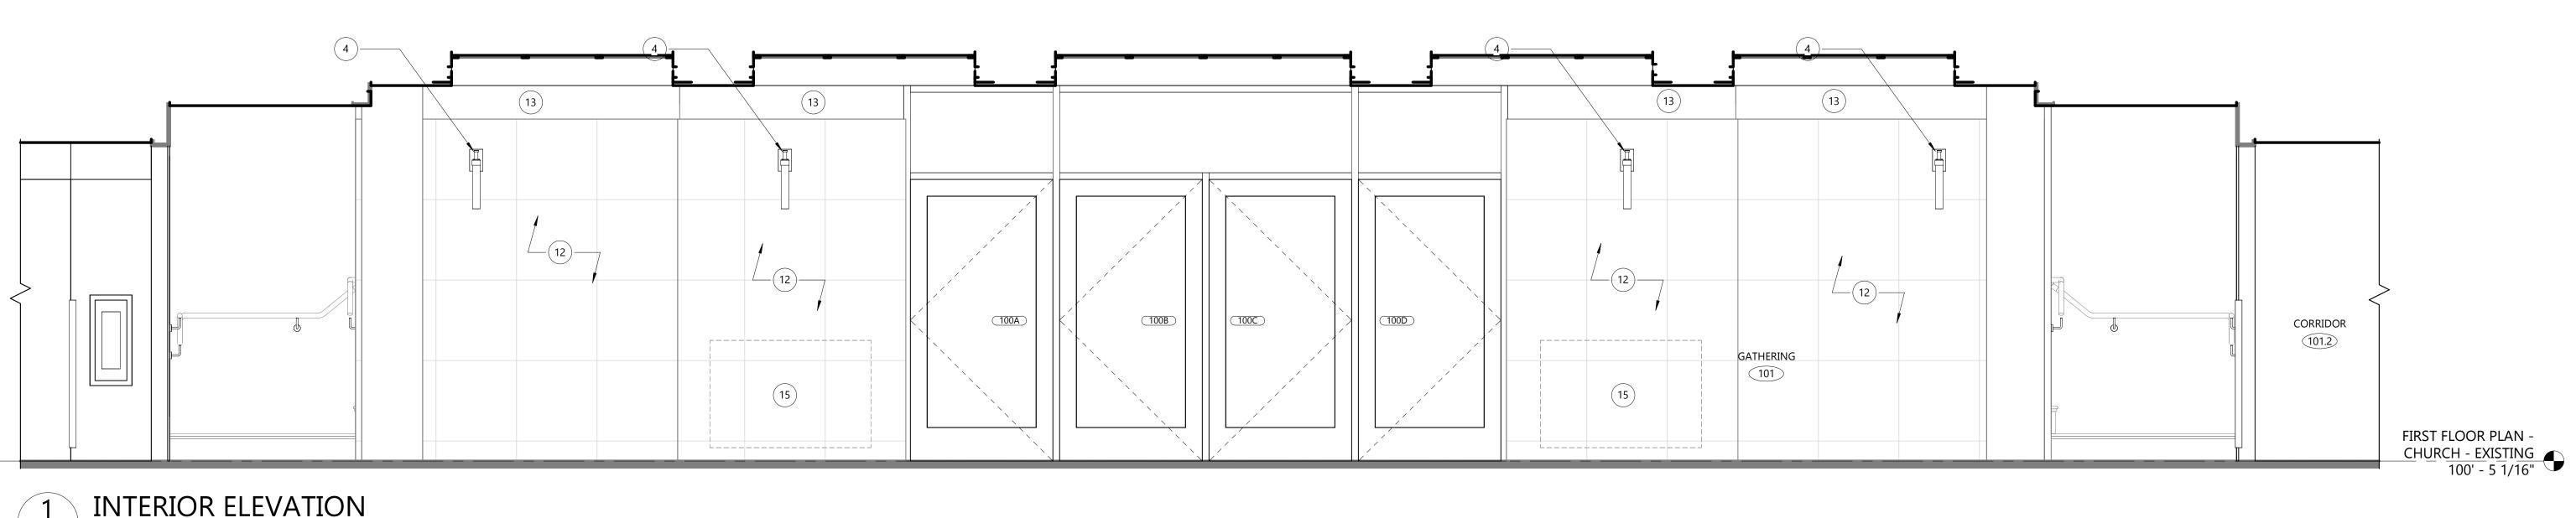

INTERIOR ELEVATION

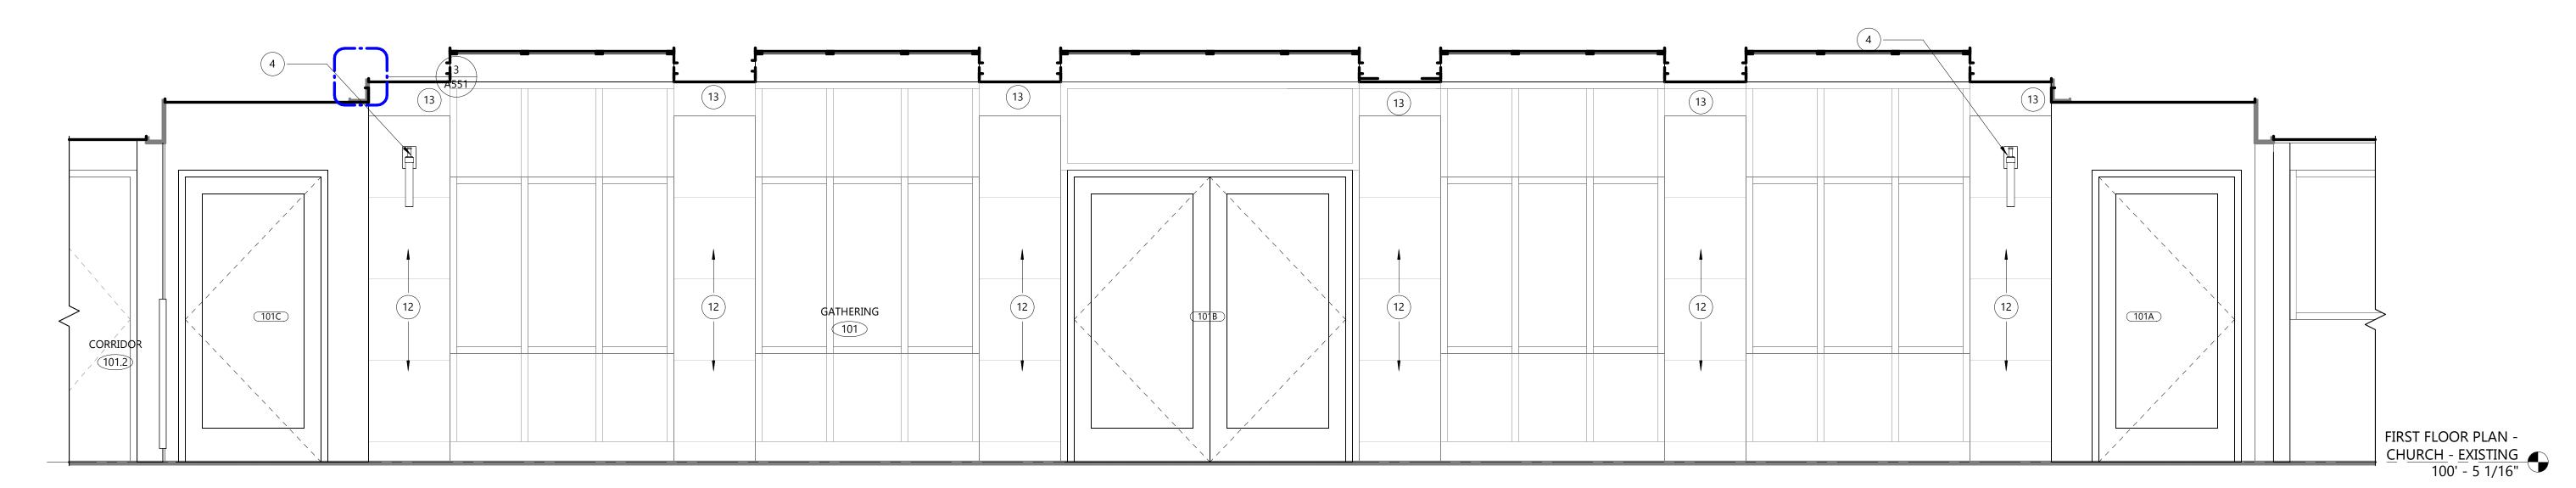

INTERIOR ELEVATION A421 1/2" = 1'-0"

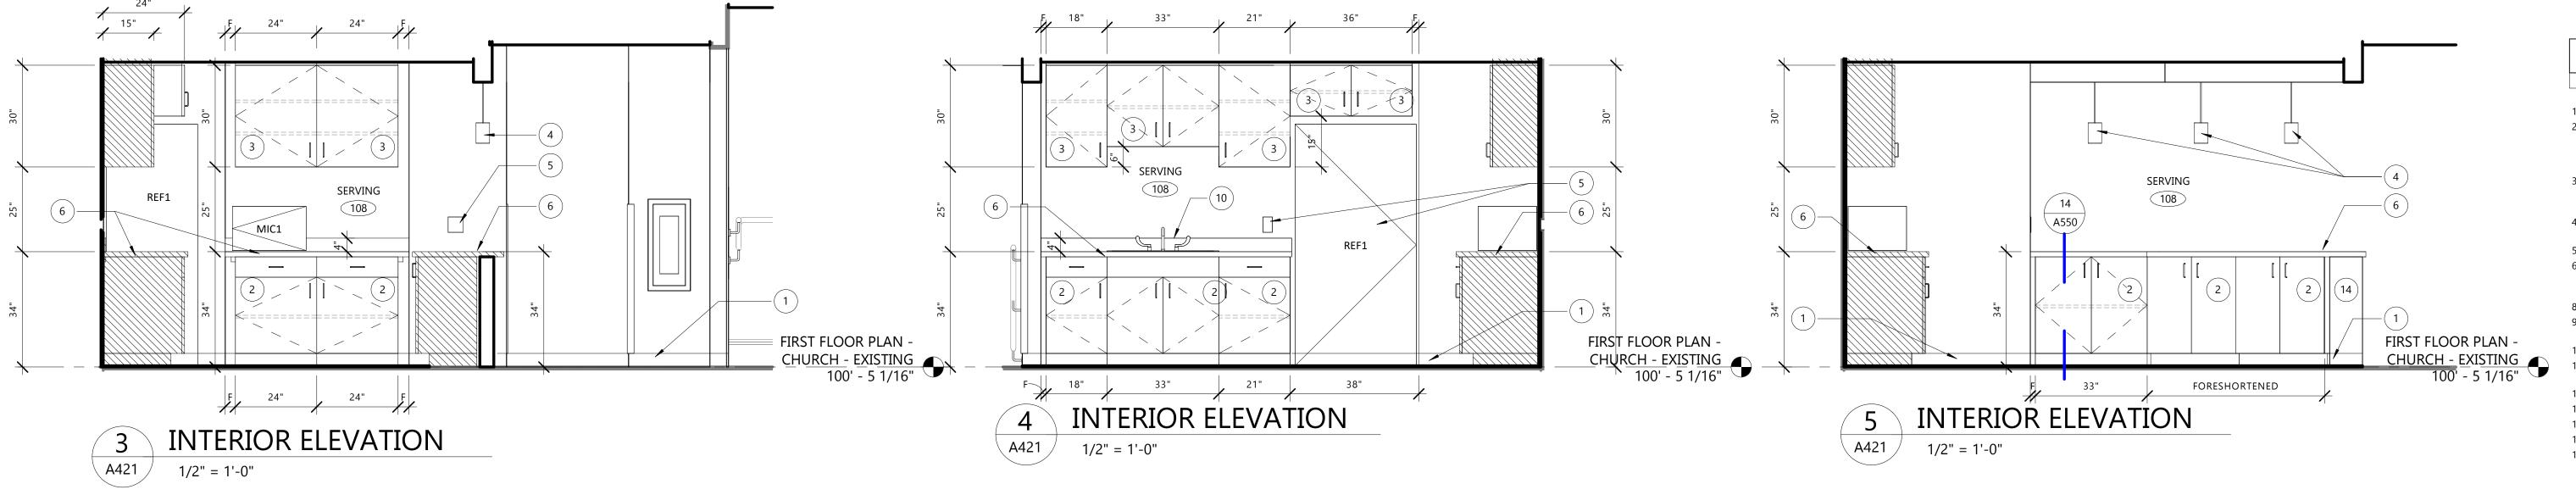

	KEYED INTERIOR ELEVATION
#	DESCRIPTION

SCHEDULED BASE. SEE FINISH SCHEDULES FOR MORE INFORMATION BASE CABINET CONSTRUCTED OF PLASTIC LAMINATE ON 3/4" PARTICLE BOARD W/ADJUSTABLE PLASTIC LAMINATE 3/4" PARTICLE BOARD SHELVES (EDGE BANDED ON FOUR (4) SIDES) ON ADJUSTABLE SHELF STANDARDS. 24" DEEP UNLESS NOTED

OTHERWISE. CABINET CONSTRUCTED OF PLASTIC LAMINATE ON 3/4" PARTICLE BOARD W/ADJUSTABLE PLASTIC LAMINATE 3/4" PARTICLE BOARD SHELVES (EDGE BANDED ON FOUR (4) SIDES)

ON ADJUSTABLE SHELF STANDARDS. 14" DEEP UNLESS NOTED OTHERWISE. PROVIDE NEW LIGHT FIXTURE SIMILAR TO VISA LIGHTING CB5201. BY OTHERS. USE EXISTING PENETRATION IN NATURAL STONE TILE.

PROVIDE NEW OUTLET. BY OTHERS. 3/8" SOLID SURFACE COUNTERTOP ON 3/4" PARTICLE BOARD (25" DEEP UNLESS NOTED OTHERWISE ON PLANS). FRONT WATERFALL EDGE. PROVIDE SQUARE, SET-ON BACK AND SIDE SPLASHES AS SHOWN IN ELEVATIONS.

EXISTING ELECTRICAL PANEL TO REMAIN. PAINT TO MATCH ADJACENT WALL. PROVIDE NEW MECHANICAL GRILL IN WALL. EXTEND EXISTING DUCTWORK. PAINT TO MATCH ADJACENT WALL.

STAINLESS STEEL DROP-IN SINK W/ GOOSENECK FAUCET & WRIST BLADES PROVIDE WALL MOUNTED MONITOR AND SPEAKERS WITH STREAMING AUDIO/VIDEO FROM SANCTUARY BROADCAST. PROVIDE BLOCKING AS REQUIRED. BY OTHERS.

EXISTING NATURAL STONE TILE TO REMAIN. PAINT PORTION OF EXISTING DRYWALL PER FINISH FLOOR PLAN.

PROVIDE NEW SURFACE MOUNTED OUTLET. BY OTHERS.

PLASTIC LAMINATE ON 1/2" PLYWOOD BACKING. EXISTING WALL HEATER TO REMAIN.

PROJECT INFO

Project No. 22.009

ENLARGED PLANS, INTERIOR ELEVATIONS - MAIN LEVEL

A421

A550 14 14 FIRST FLOOR PLAN -CHURCH - EXISTING 100' - 5 1/16" FIRST FLOOR PLAN -CHURCH - EXISTING 100' - 5 1/16" FORESHORTENED 27" 27" INTERIOR ELEVATION INTERIOR ELEVATION 1/2" = 1'-0"

		EQUIPME	NT S	СНЕГ	DULE
NO.	TYPE	OFOI	OFCI	CFCI	COMMENTS
MIC1	MICROWAVE		Х		
REF1	REFRIGERATOR		Х		
TV1	TV MONITOR		Х		

GROTH Design Group

N58 W6181 COLUMBIA RD. P.O. BOX 332 CEDARBURG, WISCONSIN 53012 PH. (262) 377-8001 FX. (262) 377-8003


ST. PAUL **LUTHERAN** PHASE 1 -**RENOVATION**


525 SUPERIOR AVE TOMAH, WI 54660


NO. REV. DATE DESCRIPTION


08.22.23

SHEET TITLE

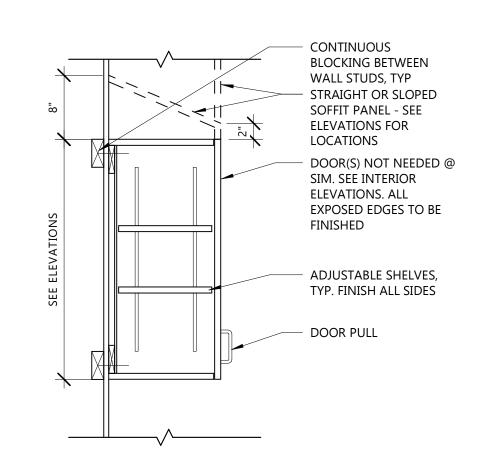

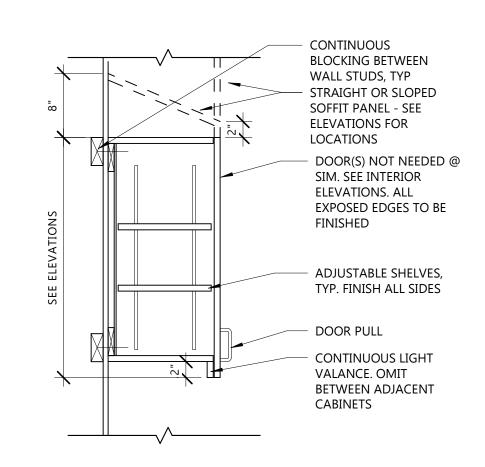

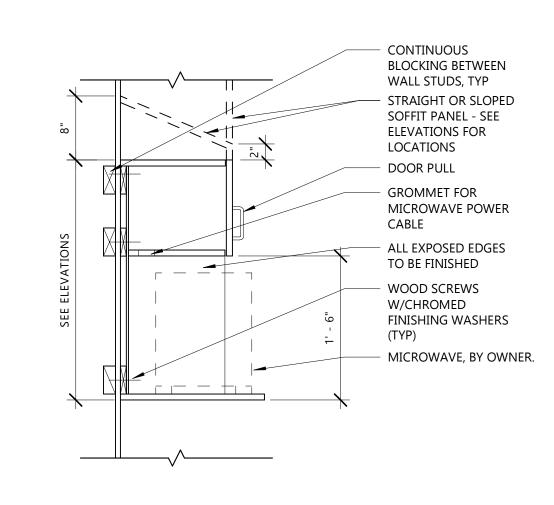

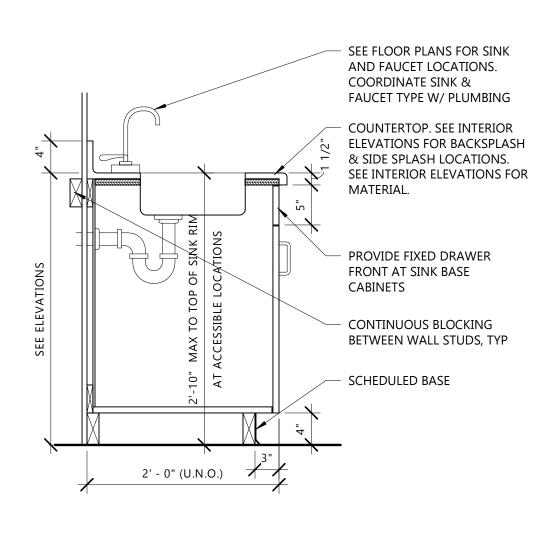



CEDARBURG, WISCONSIN 53012


PH. (262) 377-8001 FX. (262) 377-8003

6 BASE CABINET W/ SINK N58 W6181 COLUMBIA RD. P.O. BOX 332









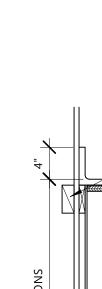



BETWEEN WALL STUDS, TYP COUNTERTOP. SEE INTERIOR **ELEVATIONS FOR BACKSPLASH & SIDE** SPLASH LOCATIONS. SEE INTERIOR ELEVATIONS FOR MATERIAL. DOOR(S) NOT NEEDED @ SIM. SEE INTERIOR ELEVATIONS. ALL EXPOSED EDGES TO BE FINISHED TWO (2) ADJUSTABLE SHELF (U.N.O.) - SEE ELEVATIONS, EDGE BAND ALL FOUR SIDES

CONTINUOUS BLOCKING

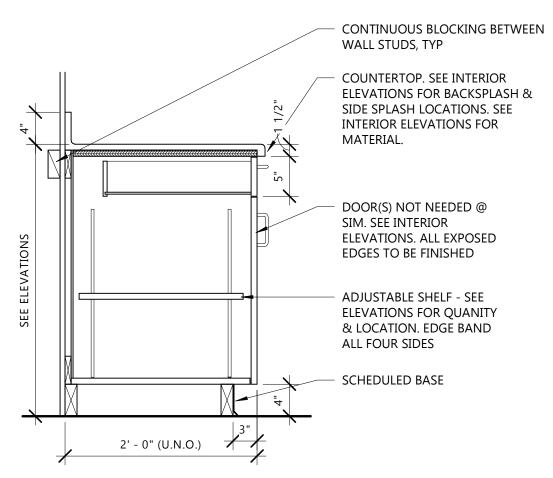

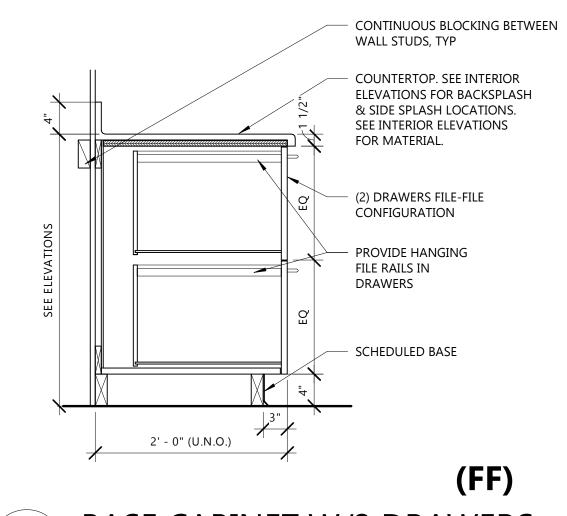

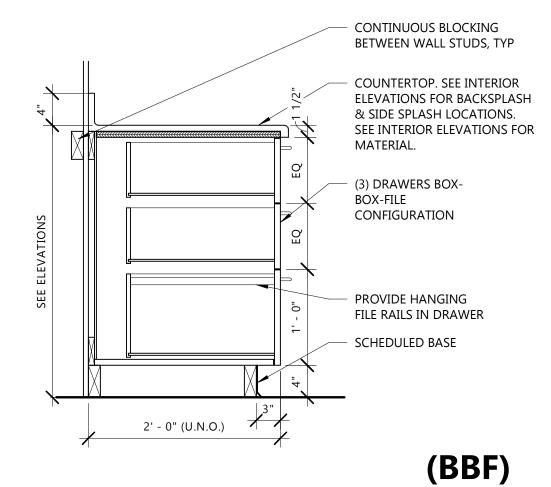


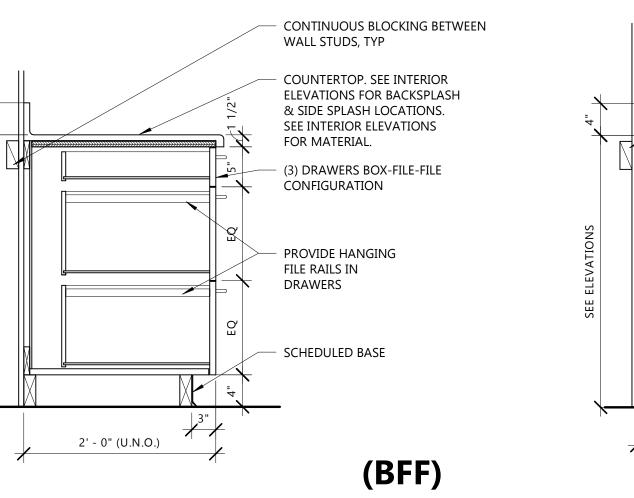


BASE CABINET W/3 DRAWERS

A550

1" = 1'-0"

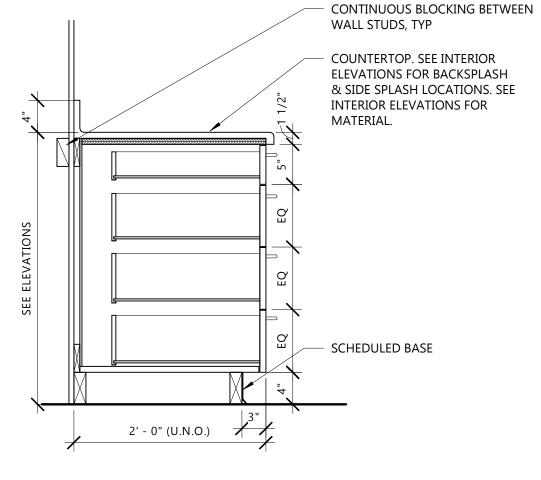


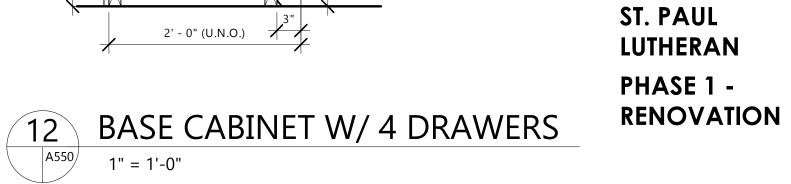



2' - 0" (U.N.O.)



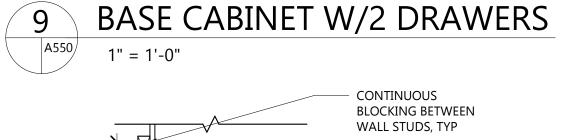

ADJUSTABLE SHELVES,

TYP. FINISH ALL SIDES.

STANDARDS @ 48" OC

MAX. SEE MATERIAL

LEGEND FOR COLOR


SHELF BRACKETS. SEE

COLOR

MATERIAL LEGEND FOR


SEE ELEVATIONS FOR

QUANTITY

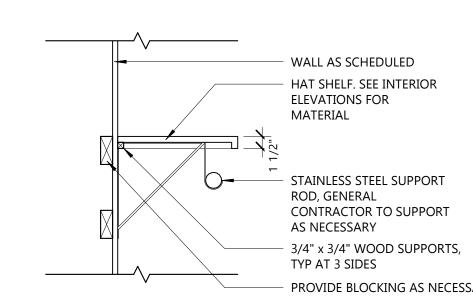

A550

1" = 1'-0"

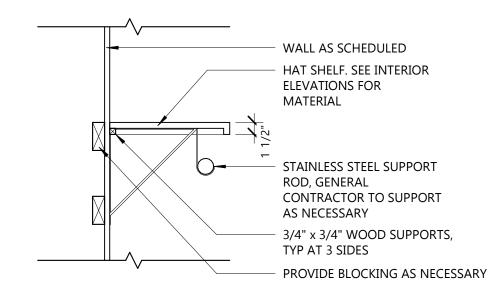



BASE CABINET W/3 DRAWERS

525 SUPERIOR AVE TOMAH, WI 54660

PROJECT

NO. REV. DATE DESCRIPTION

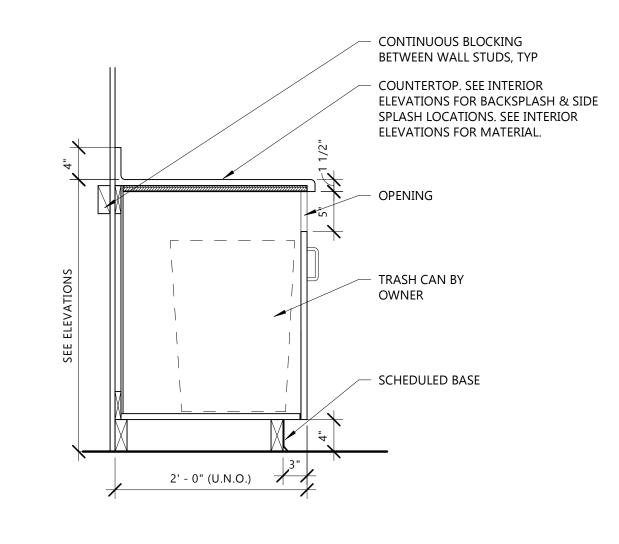

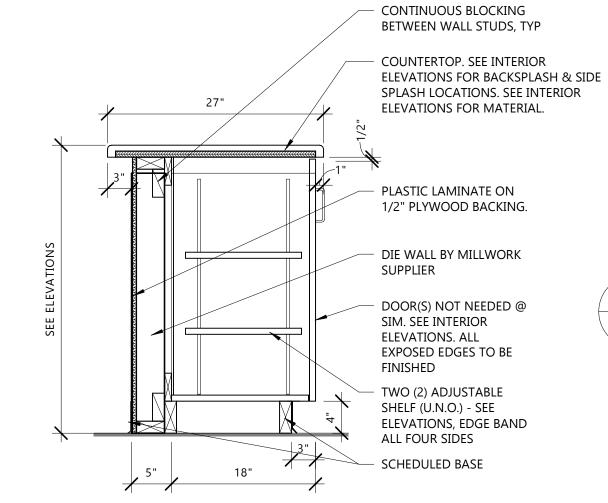



14" (U.N.O.)



BASE CABINET W/ GARBAGE A550





PROJECT INFO

Date 08.22.23 Project No. 22.009

SHEET TITLE GENERAL INTERIOR DETAILS

SCRIBE COUNTERTOP OR BACKSPASH TO TO WALL. UNBACKED SCRIBE SPANS SHALL NOT EXCEED 1/2". **GAPS SHALL NOT** EXCEED 1/32" AND ARE TO BE CAUKED

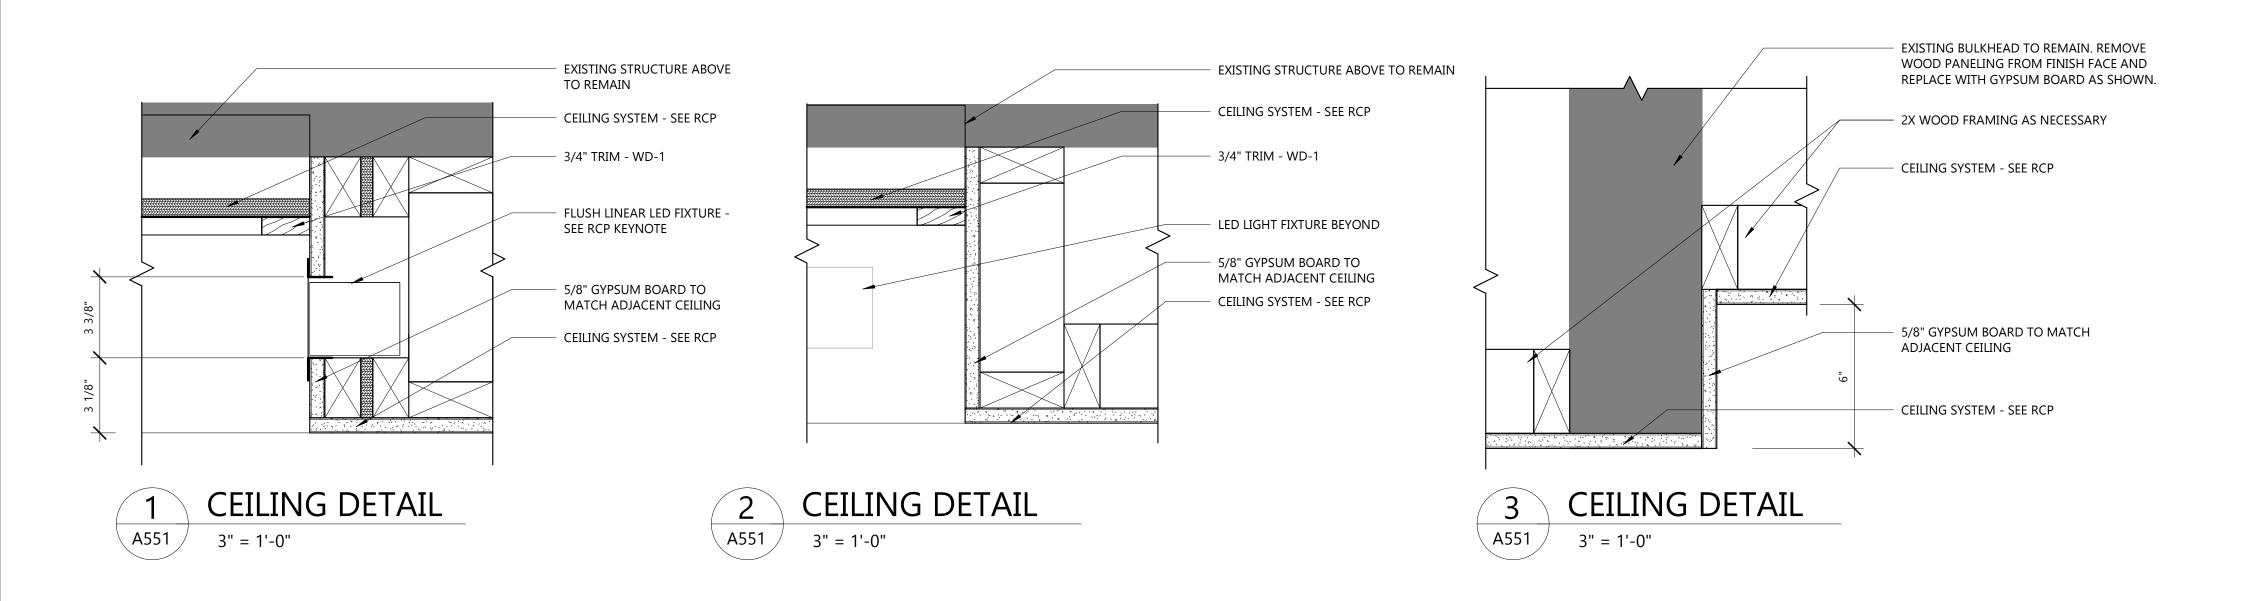

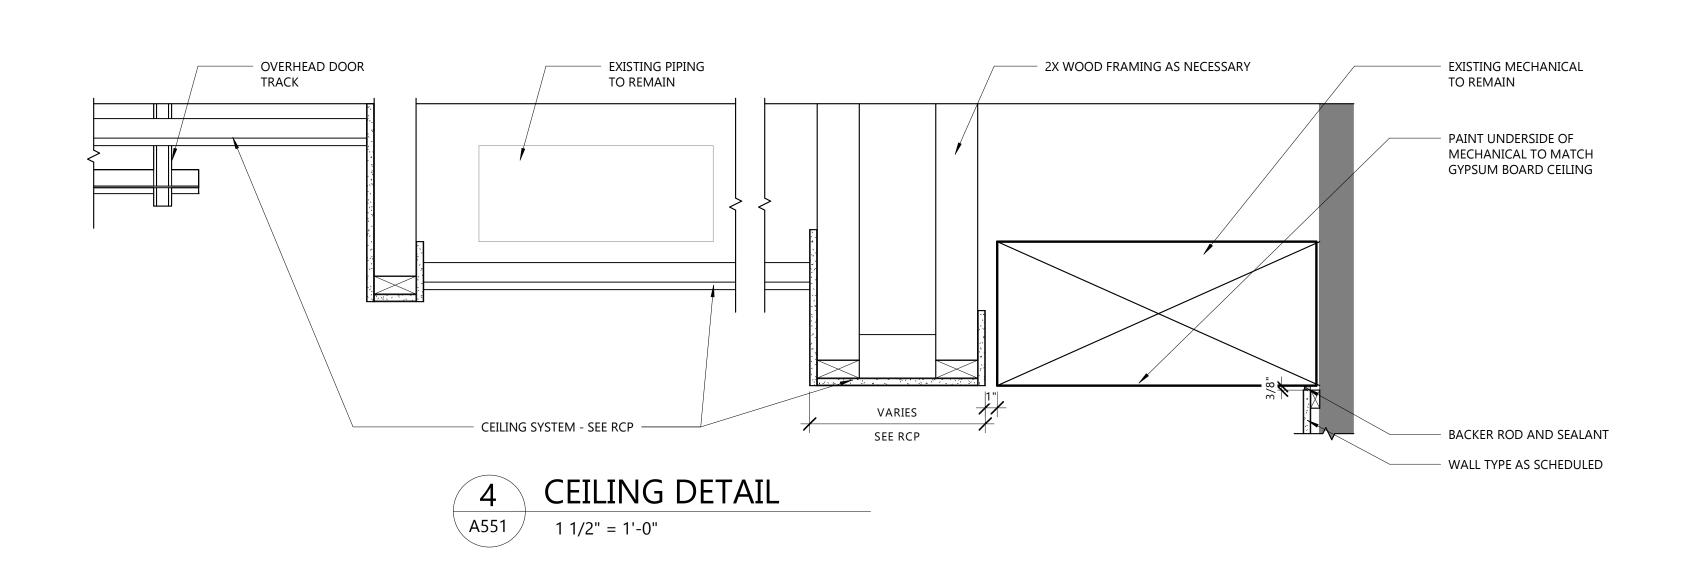



N58 W6181 COLUMBIA RD. P.O. BOX 332 CEDARBURG, WISCONSIN 53012 PH. (262) 377-8001 FX. (262) 377-8003

PROJEC

ST. PAUL LUTHERAN PHASE 1 -RENOVATION

525 SUPERIOR AVE TOMAH, WI 54660

ISSUE

NO. REV. DATE DESCRIPTION

PROJECT INFO


Date

Project No. 22.009


SHEET TITLE

GENERAL INTERIOR DETAILS

551

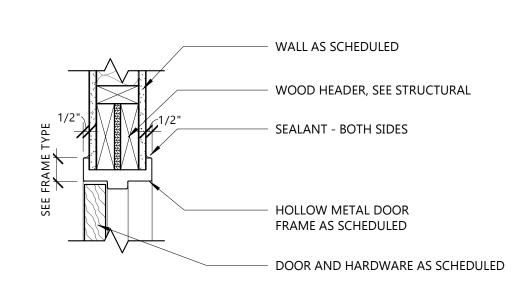

HM DOOR HEAD - JAMB SIM

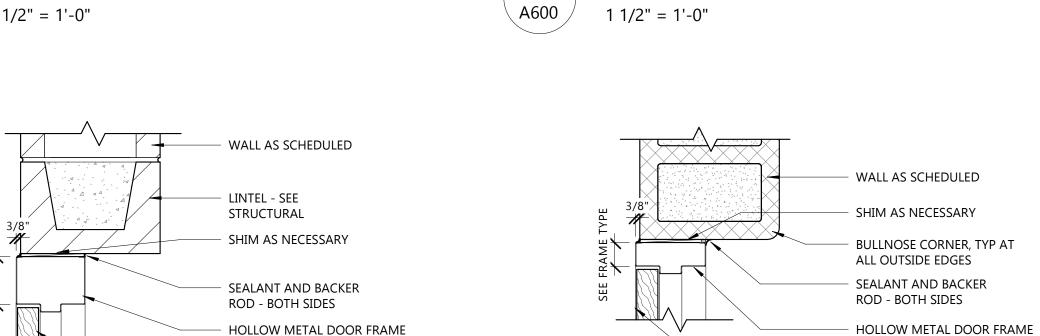


\ A600


DOOR AND HARDWARE AS SCHEDULED HM DOOR HEAD @ CMU

1 1/2" = 1'-0"


1 1/2" = 1'-0"

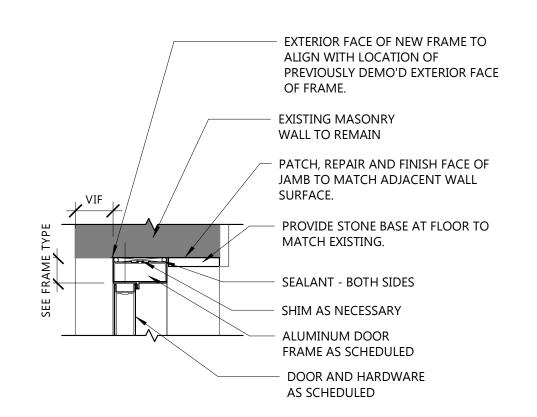

ALUM DOOR JAMB AT WALL

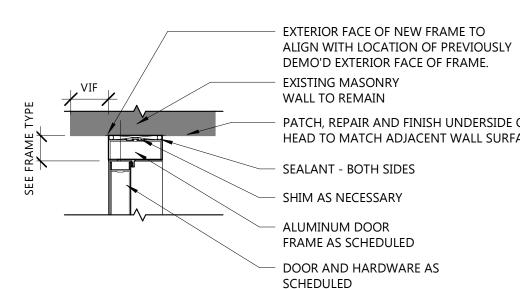

1 1/2" = 1'-0"

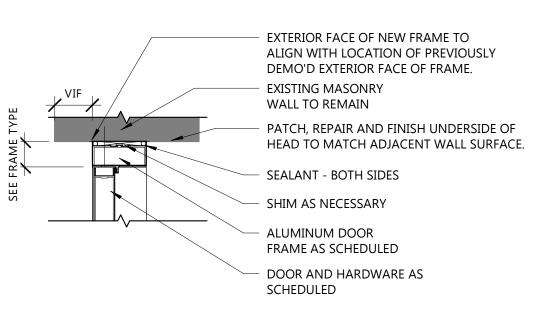

6 ALUM DOOR HEAD AT WALL

WALL AS SCHED

2x WOOD BLOCKING

WOOD HEADER, SEE

SHIM AS NECESSARY

1x WOOD CASING AND TRIM


DOOR AND HARDWARE AS SCHEDULED

- DOOR AND HARDWARE AS SCHEDULED


STRUCTURAL


WD DOOR HEAD - JAMB SIM

HM DOOR JAMB @ CMU

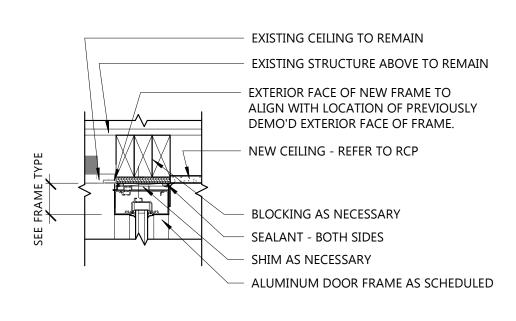



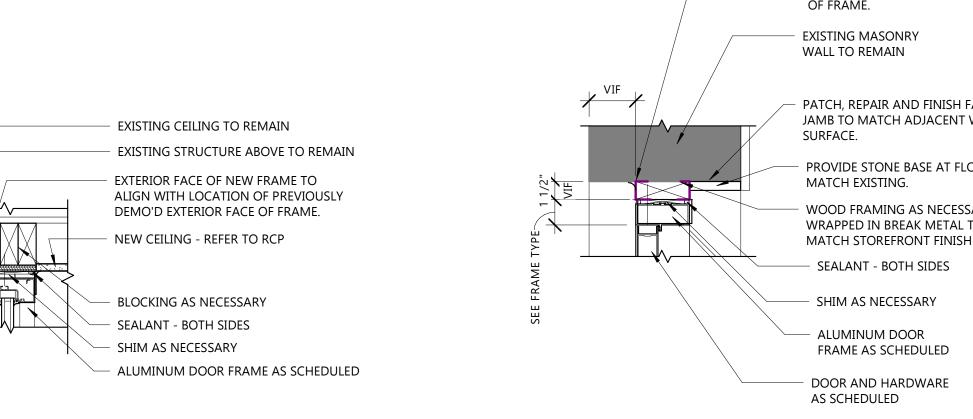


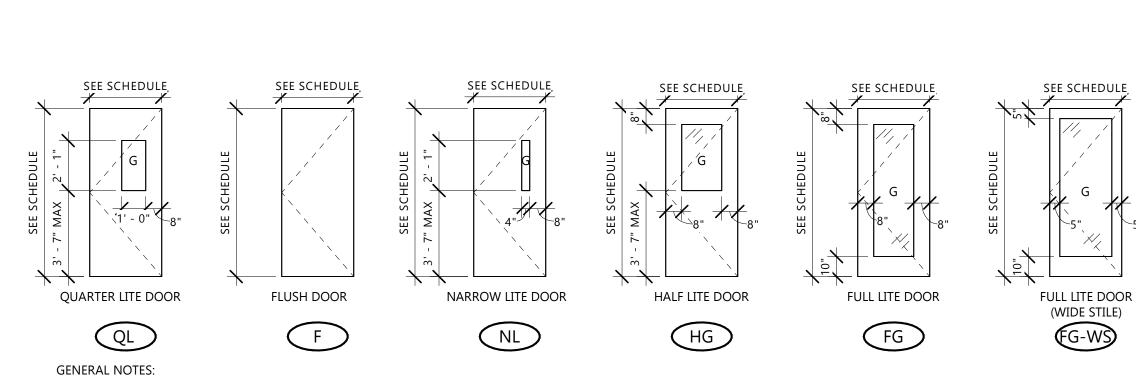


、A600 ∕

1 1/2" = 1'-0"

- NOT ALL TYPES SHOWN HERE MAY BE USED. SEE DOOR SCHEDULE. "G" DENOTES GLAZING; SEE DOOR SCHEDULE AND NOTES FOR DOOR GLAZING TYPE ALL EXTERIOR DOORS TO BE INSULATED HOLLOW METAL OR THERMALLY BROKEN ALUMINUM. SEE SPECIFICATION FOR MINIMUM THERMAL PERFORMANCE
- DOOR TYPES

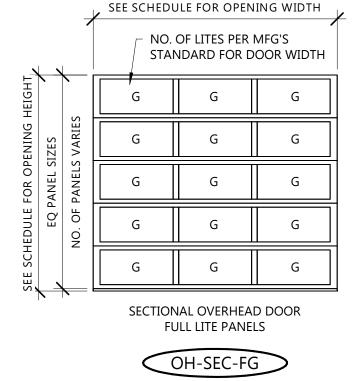

NOT ALL TYPES SHOWN HERE MAY BE USED. SEE DOOR SCHEDULE. "G" DENOTES GLAZING; SEE DOOR SCHEDULE AND NOTES FOR DOOR GLAZING TYPE MINIMUM THERMAL PERFORMANCE

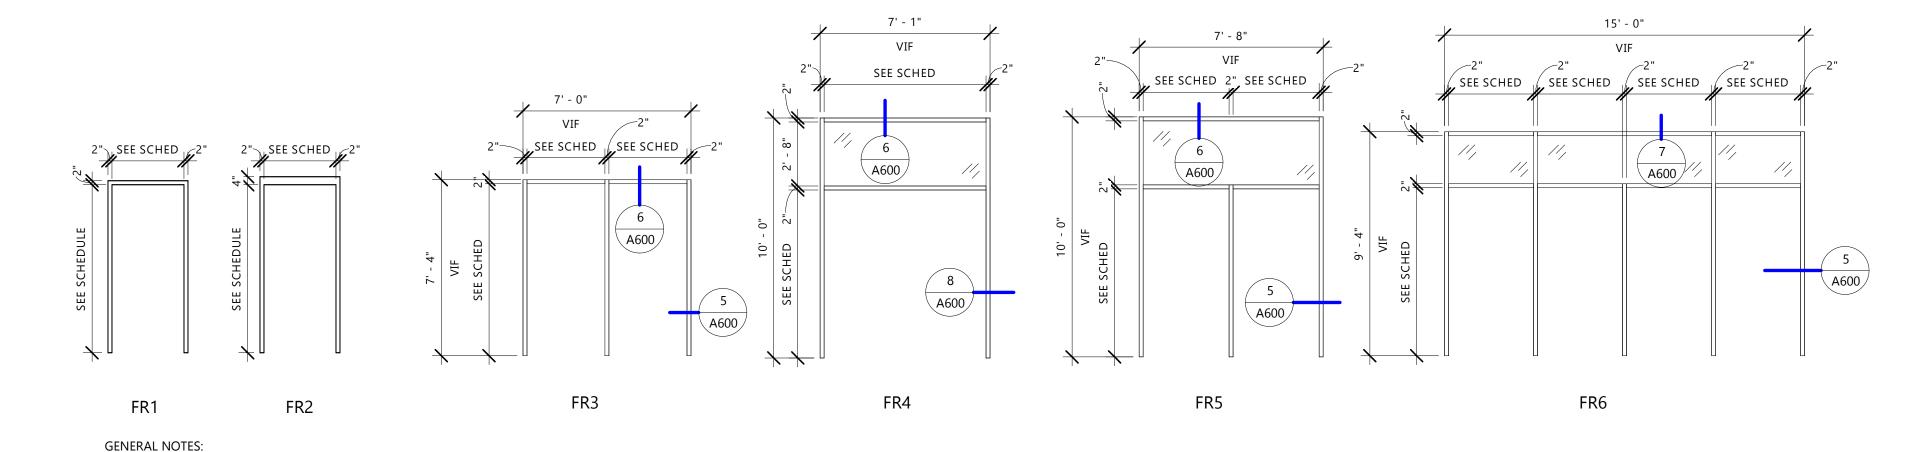


FRAME TYPES

NOT ALL TYPES SHOWN HERE MAY BE USED. SEE DOOR SCHEDULE.

2) "G" DENOTES GLAZING; SEE DOOR SCHEDULE AND NOTES FOR DOOR GLAZING TYPE

¹ IF DOOR TYPE IS BLANK, SEE COMMENTS FOR ADDITIONAL INFORMATION ² IF FRAME TYPE IS BLANK, SEE COMMENTS & WINDOW ELEVATIONS FOR ADDITIONAL INFORMATION ³ SEE GENERAL DOOR NOTES & SPECIFICATIONS FOR ADDITIONAL GLAZING INFORMATION

										DOOR S	CHEDULE							
	DOOR			FRAME														
NO. ROOM	TYPE ¹	OVERALL WIDTH	ACTIVE LEAF	HEIGHT	MAT'L	FINISH	GLAZ ³	TYPE ²	MAT'L	FINISH	GLAZ ³	DEPTH	JAMB	HEAD	RATING	COMMENTS	OVT Hardware Set	
100A	GATHERING	FG-WS	3' - 6 1/2"		7' - 0"	ALUM	DARK BRONZE	IG-1T	FR6	ALUM	DARK BRONZE	IG-1	4 1/2"	5/A600	7/A600			07
100B	GATHERING	FG-WS	3' - 6 1/2"		7' - 0"	ALUM	DARK BRONZE	IG-1T	FR6	ALUM	DARK BRONZE	IG-1	4 1/2"	5/A600	7/A600			10
100C	GATHERING	FG-WS	3' - 6 1/2"		7' - 0"	ALUM	DARK BRONZE	IG-1T	FR6	ALUM	DARK BRONZE	IG-1	4 1/2"	5/A600	7/A600			09
100D	GATHERING	FG-WS	3' - 6 1/2"		7' - 0"	ALUM	DARK BRONZE	IG-1T	FR6	ALUM	DARK BRONZE	IG-1	4 1/2"	5/A600	7/A600			08
101A	WORSHIP	FG-WS	3' - 4"		7' - 0"	WD-1	STN	G-1T	FR1	WD-1	STN		6 1/2"	2/A600	2/A600			02
101B	WORSHIP	FG-WS	6' - 8"	3' - 4"	7' - 0"	WD-1	STN	G-1T	FR1	EXISTING	EXISTING		11"	EXISTING	EXISTING			01
101C	WORSHIP	FG-WS	3' - 4"		7' - 0"	WD-1	STN	G-1T	FR1	WD-1	STN		6 1/2"	2/A600	2/A600			02
103A	ENTRY	FG-WS	3' - 7"		7' - 0"	ALUM	DARK BRONZE	IG-1T	FR5	ALUM	DARK BRONZE	IG-1	4 1/2"	5/A600	6/A600			07
103B	ENTRY	FG-WS	3' - 7"		7' - 0"	ALUM	DARK BRONZE	IG-1T	FR5	ALUM	DARK BRONZE	IG-1	4 1/2"	5/A600	6/A600			08
104.1	WOMEN	F	3' - 0"		7' - 0"	WD-1	STN		FR1	НМ	PT-2		5 3/4"	1/A600	1/A600			06
104.2	MEN	F	3' - 0"		7' - 0"	WD-1	STN		FR1	НМ	PT-2		5 3/4"	1/A600	1/A600			06
109A	ENTRY	FG-WS	3' - 7"		7' - 0"	ALUM	DARK BRONZE	IG-1T	FR5		DARK BRONZE	IG-1	4 1/2"	5/A600	6/A600			07
109B	ENTRY	FG-WS	3' - 7"		7' - 0"	ALUM	DARK BRONZE	IG-1T	FR5	ALUM	DARK BRONZE	IG-1	4 1/2"	5/A600	6/A600			08
109C	ENTRY	FG-WS	3' - 7"		7' - 0"	ALUM	DARK BRONZE	IG-1T	FR5		DARK BRONZE	IG-1	4 1/2"	5/A600	6/A600			12
109D	ENTRY	FG-WS	3' - 7"		7' - 0"	ALUM	DARK BRONZE	IG-1T	FR5	ALUM	DARK BRONZE	IG-1	4 1/2"_	5/A600	6/A600			08
110.1	STORAGE	F	2' - 6"		4' - 6"	WD-1	PT-1		FR1	WD-1	PT-1		5 1/8"	2/A600	2/A600			03
110.2	STORAGE	F	3' - 0"		4' - 6"	WD-1	PT-1		FR1	WD-1	PT-1		5 1/8"	2/A600	2/A600			03
110A	LIBRARY	FG-WS	3' - 0"		7' - 0"	WD-1	STN	G-1T	FR1	НМ	PT-2		5 3/4"	1/A600	1/A600			05
110B	LIBRARY	OH-SEC-FG	6' - 8"		7' - 4"	ALUM	DARK BRONZE	G-1T	TRK-SEC-HI	STL	-		12"				SEE ALTERNATE 2	
111.2	STORAGE	F	1' - 6"		4' - 6"	WD-1	PT-1		FR1	WD-1	PT-1		5 3/4"	2/A600	2/A600			04
111A	PARENTING	FG-WS	3' - 0"		7' - 0"	WD-1	STN	G-1T	FR2	НМ	PT-2		5 3/4"	3/A600	4/A600		SEE ALTERNATE 2	05
111B	PARENTING	OH-SEC-FG	6' - 8"		7' - 4"	ALUM	DARK BRONZE	G-1T	TRK-SEC-HI	STL	-		12"				SEE ALTERNATE 2	
115A	ENTRY	FG-WS	6' - 9"	3' - 4 1/2"	7' - 0"	EXISTING	EXISTING		FR4	ALUM	DARK BRONZE	IG-1	4 1/2"	8/A600	6/A600			13
124A	VESTIBULE	FG-WS	3' - 3"		7' - 2"	ALUM	DARK BRONZE	IG-1T	FR3	ALUM	DARK BRONZE	IG-1	4 1/2"	5/A600	6/A600			09
124B	VESTIBULE	FG-WS	3' - 3"		7' - 2"	ALUM	DARK BRONZE	IG-1T	FR3	ALUM	DARK BRONZE	IG-1	4 1/2"	5/A600	6/A600			11

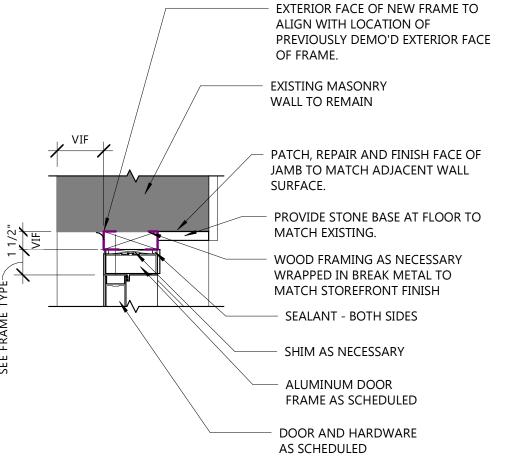

ALUM DOOR JAMB AT WALL




TRK-SEC-STD	SECTIONAL DOOR TRACK - STANDARD
TRK-SEC-LOW	SECTIONAL DOOR TRACK - LOW HEADROOM
TRK-SEC-HI	Sectional Door Track - HI-Lift

1 1/2" = 1'-0"

G	G	G		TRACK/GUIDE	KEY:
G	G	G		TRK-SEC-STD TRK-SEC-LOW	SECTIONAL SECTIONAL
G	G	G		TRK-SEC-HI	SECTIONAL DO
G	G	G			
G	G	G			
SECTIO	NAL OVERHEA	D DOOR	1		

GENERAL NOTES: ALL EXTERIOR DOORS TO HAVE THERMALLY INSULATED PANELS/SLATS. SEE SPECIFICATIONS FOR

OVERHEAD DOOR TYPES 1/4" = 1'-0"

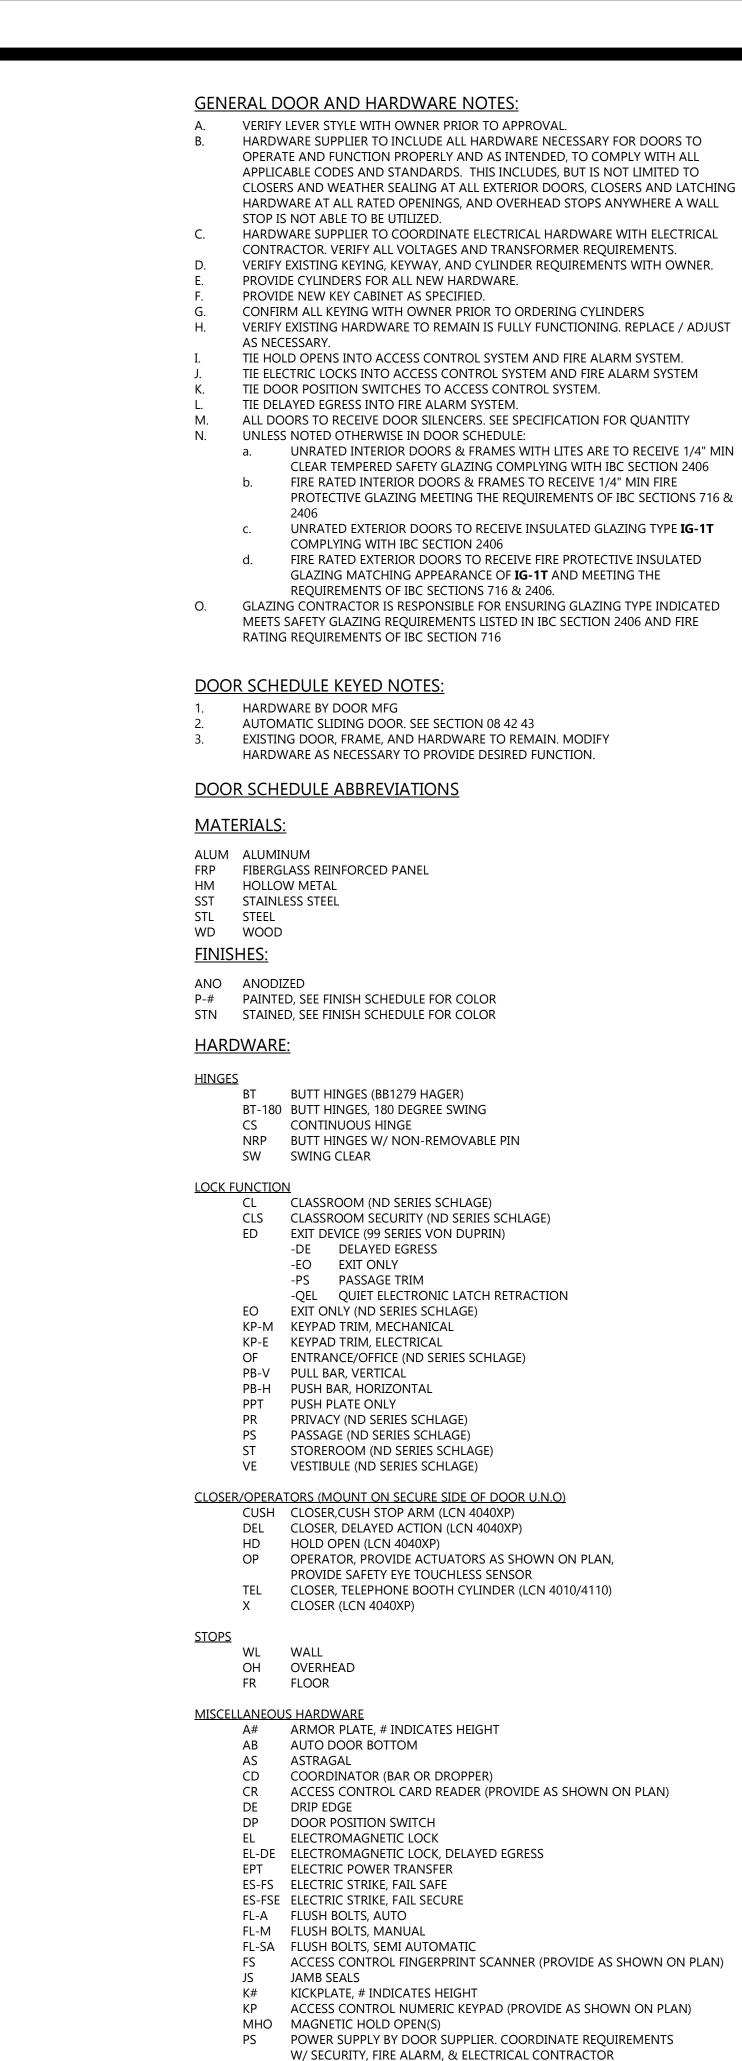

RLM REMOVABLE MULLION

SP SWEEP

GLAZING TYPES

TH THRESHOLD

GLAZING GENERAL NOTES

WITH IBC 2406

RX-OH REQUEST TO EXIT - OVERHEAD MOTION DETECTOR

G-1T 1/4" MIN CLEAR TEMPERED FLOAT GLASS

IG-1 1" INSULATED GLAZING, TYPICAL U.N.O.

IG-1T 1" INSULATED GLAZING, TEMPERED

IG-2 1" INSULATED SPANDREL GLAZING

GLAZING KEY

IG-2T 1" INSULATED SPANDREL GLAZING, TEMPERED

IG-3 1" INSULATED GLAZING WITH SIMULATED DIVIDED LIGHT,

SEE WINDOW AND DOOR ELEVATIONS FOR PATTERN

SEE WINDOW AND DOOR ELEVATIONS FOR PATTERN

IG-3T 1" INSULATED GLAZING, TEMPERED WITH SIMULATED DIVIDED LIGHT,

RX-LK REQUEST TO EXIT - FEATURE BUILT-IN TO LOCKSET OR EXIT DEVICE

Design Group N58 W6181 COLUMBIA RD. P.O. BOX 332 CEDARBURG, WISCONSIN 53012 PH. (262) 377-8001 FX. (262) 377-8003 ST. PAUL **LUTHERAN** PHASE 1 -**RENOVATION 525 SUPERIOR TOMAH, WI 54660** NO. REV. DATE DESCRIPTION

GLAZING CONTRACTOR TO VERIFY ALL LOCATIONS OF SAFETY GLAZING COMPLY PROJECT INFO Date 08.22.23 Project No. 22.009 ____ SHEET TITLE

DOOR SCHEDULE & TYPES

A600